

## Flash

LED system creating direct light that flows downward from the light source. Stainless steel strip, 9mm (.35") in width, can be stretched up to 12m (39Ft.) in length. Flash is an ideal solution for direct illumination of spaces with high ceilings.

Available upon request at up to 39 ft.

Flash pays an homage to the famous comic book superhero who can run seven times the speed of light.

This cutting-edge, Italian company, consisting of nineteen artistic, talented designers, creates unique, modern and highly sophisticated lighting.

They have been published in twenty-eight books and fifty-eight magazines in Italy. Including: Interni, Elle Decor Italia, Brava Casa, Casa De Abitre. etc.

Available in:  
Matte Black

### Standard Lengths:

19 1/2 ft (**6m**)  
24 V DC - 66 W LED  
3000K - 7200 lm


39 ft (**12m**)  
24 V DC - 132 W LED  
3000K - 14400 lm

\*Field cuttable.

Remote LED Driver Mounting Required.


1 / 10 V - Dimmable  
Input 100/120 V - 50/60 Hz  
Output 24 V DC - 20/150W



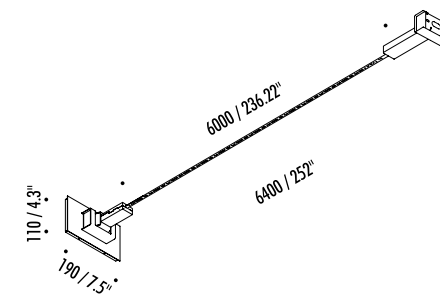


19000403	MATT BLACK	24 V DC - 66 W LED - 3000K - 7200 lm LED MODULE LENGTH 6 m - CAN BE CUT INTO ANY DESIRED LENGTH INCLUDES TWO TURNBUCKLES WITH WALL BACK PLATE LED DRIVER NOT INCLUDED - INSTALLATION OPTIONS SEE PAGE 38 - 39



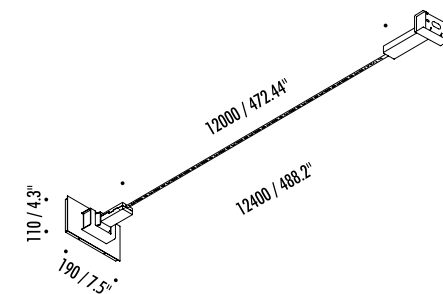


19240403	MATT BLACK	24 V DC - 132 W LED - 3000K - 14400 lm LED MODULE LENGTH 12 m - CAN BE CUT INTO ANY DESIRED LENGTH INCLUDES TWO TURNBUCKLES WITH WALL BACK PLATE LED DRIVER NOT INCLUDED - INSTALLATION OPTIONS SEE PAGE 38 - 39



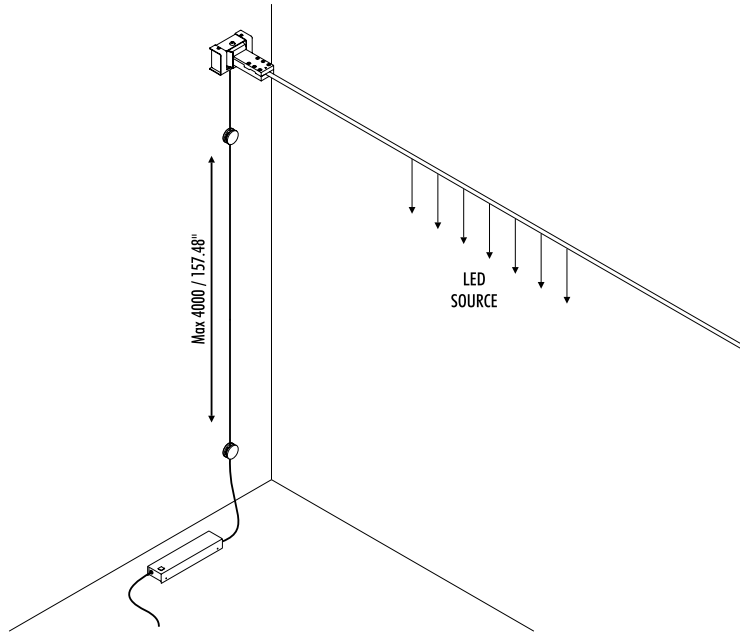

19020403	MATT BLACK	POWER SUPPLY WITH PLUG KIT - LED DRIVER WITH DIMMER ALONG THE CABLE INPUT 100 / 120 V - 50 / 60 Hz - OUTPUT 24 V DC TWO CLAMPS INCLUDED

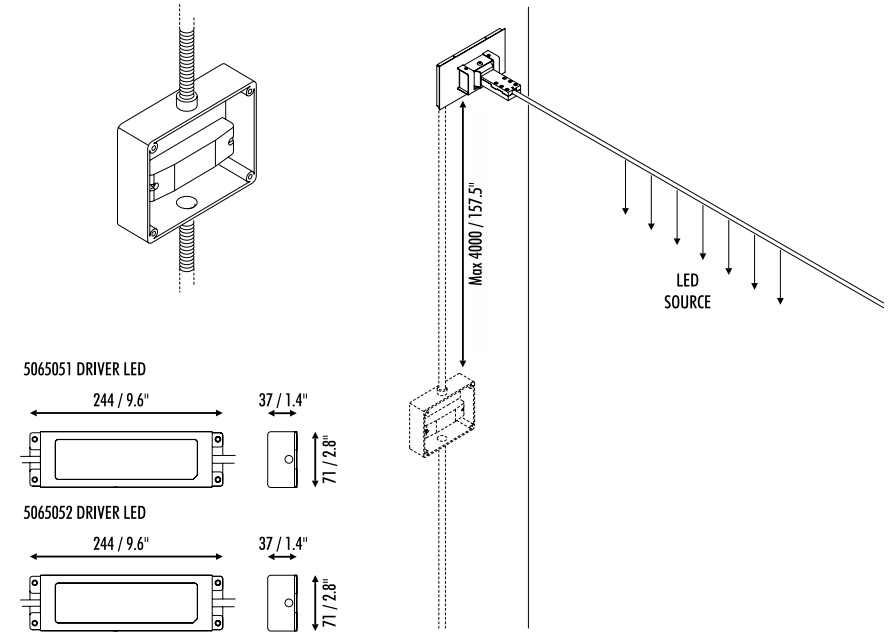

5065051	STANDARD	REMOTE LED DRIVER MOUNTING - DALI DIMMABLE INPUT 100 / 120 V - 50 / 60 Hz - OUTPUT 24 V DC - 20 / 150 W
5065052	STANDARD	REMOTE LED DRIVER MOUNTING - 1 / 10 V DIMMABLE INPUT 100 / 120 V - 50 / 60 Hz - OUTPUT 24 V DC - 20 / 150 W

