



FLASH

LED system creating direct light that flows downward from the light source. Stainless steel strip, 10mm (.39") in width, can be stretched up to 12m (39 ft.) in length. Flash is an ideal solution for direct illumination of spaces with high ceilings. Flash pays an homage to the famous comic book superhero who can run seven times the speed of light.

DETAILS.

AVAILABLE IN: MATTE BLACK

STANDARD LENGTHS:

19.7 FT (6M)

24 V DC – MAX 45W LED

3000K - 5700 LM

*AVAILABLE IN 2700K.

39 FT (12M)

24 V DC – MAX 90W LED

3000K - 11400 LM

*AVAILABLE IN 2700K.

FIELD CUTTABLE EVERY 1.9"

INCLUDES POWER SUPPLY KIT - INPUT 120 V - 50/60 HZ




PUSH / 0/1-10V / TRIAC/IGBT - DIMMABLE

MAX DISTANCE: 13FT (4000MM)

UL LISTED

*POWER SUPPLY WITH PLUG KIT AVAILABLE.

FLASH

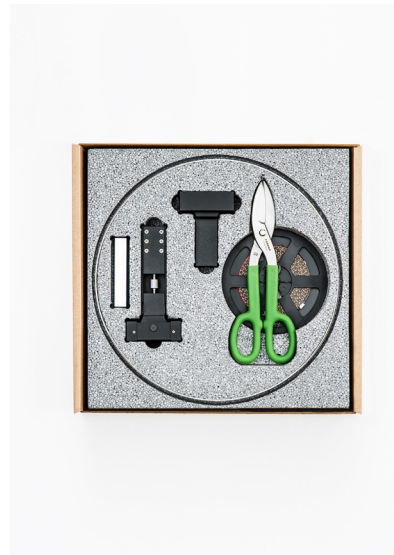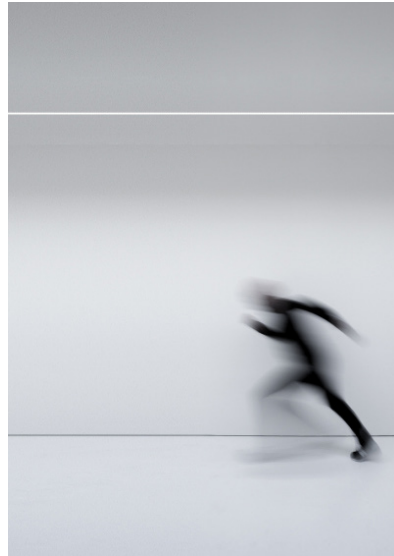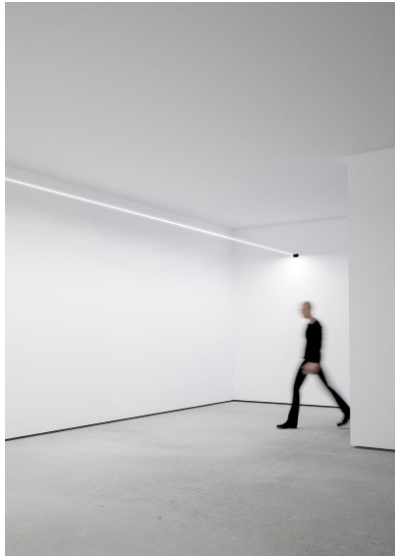


IIPL

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

FLASH

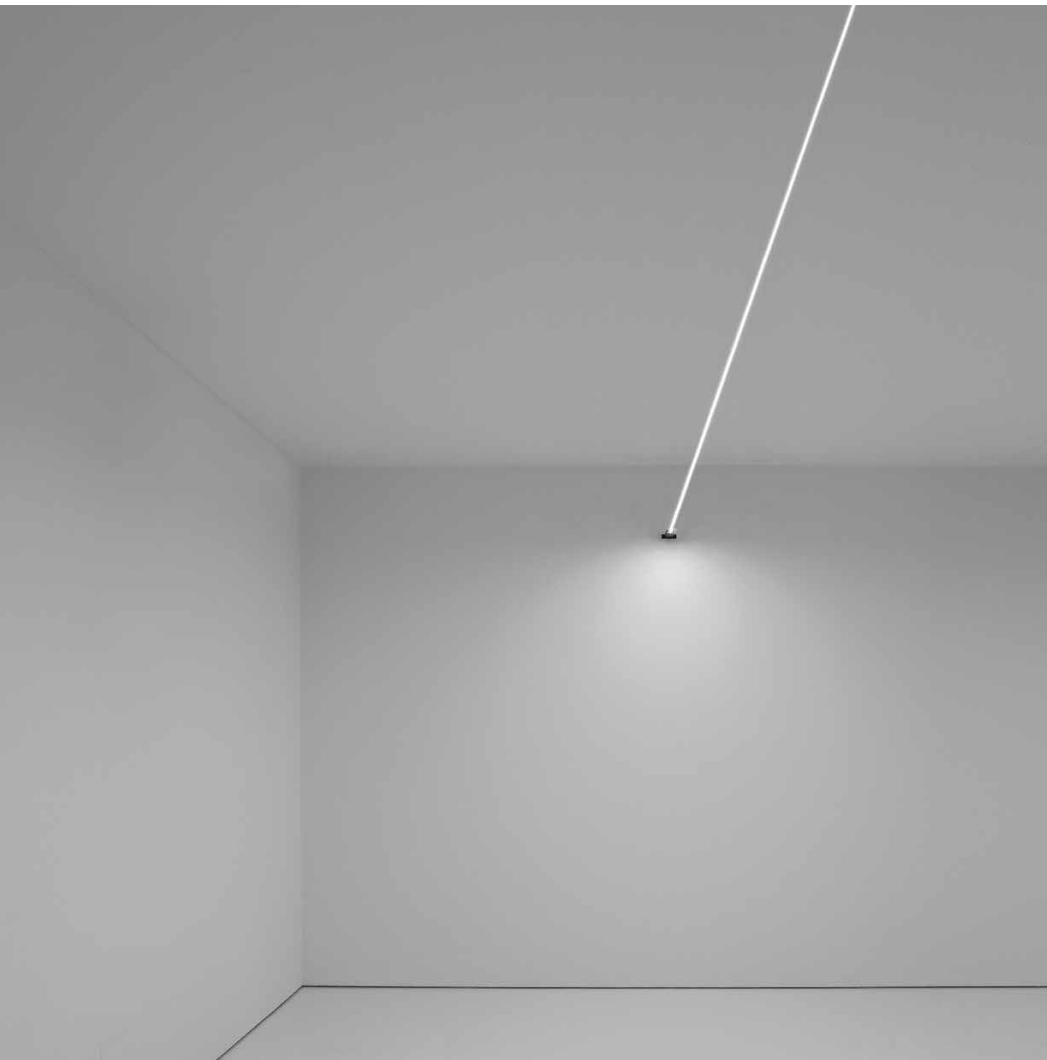


The sizes are expressed in millimeters / inches.

DESIGN DAVIDE GROPPI - 2017
WALL LAMP - METAL



FLASH 6

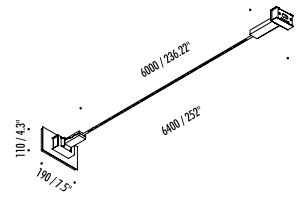

1A2130403.27.05	MATT BLACK - 2700K - DIM	FLASH 6 - REMOTE KIT 24 V DC - MAX 45 W LED
1A2130403.30.05	MATT BLACK - 3000K - DIM	2700K - 5592 lm - CRI > 90 / 3000K - 5700 lm - CRI > 90 LED MODULE 6 m / 236.22" LONG - HARMONIC STEEL STRIP 10 mm / 0.39" WIDE CAN BE CUT EVERY 48,3 mm / 1.90" INCLUDES INDEPENDENT POWER SUPPLY KIT INPUT 120 V - 60 Hz DALI - PUSH - 0/1-10 V - TRIAC/IGBT DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED
1A2130403.27.06	MATT BLACK - 2700K	FLASH 6 - PLUG KIT 24 V DC - MAX 45 W LED
1A2130403.30.06	MATT BLACK - 3000K	2700K - 5592 lm - CRI > 90 / 3000K - 5700 lm - CRI > 90 LED MODULE 6 m / 236.22" LONG - HARMONIC STEEL STRIP 10 mm / 0.39" WIDE CAN BE CUT EVERY 48,3 mm / 1.90" INCLUDES INDEPENDENT POWER SUPPLY KIT WITH PLUG INPUT 120 V - 60 Hz DIMMER OPTIONAL ACCESSORIES NOT INCLUDED


IIPL

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

FLASH

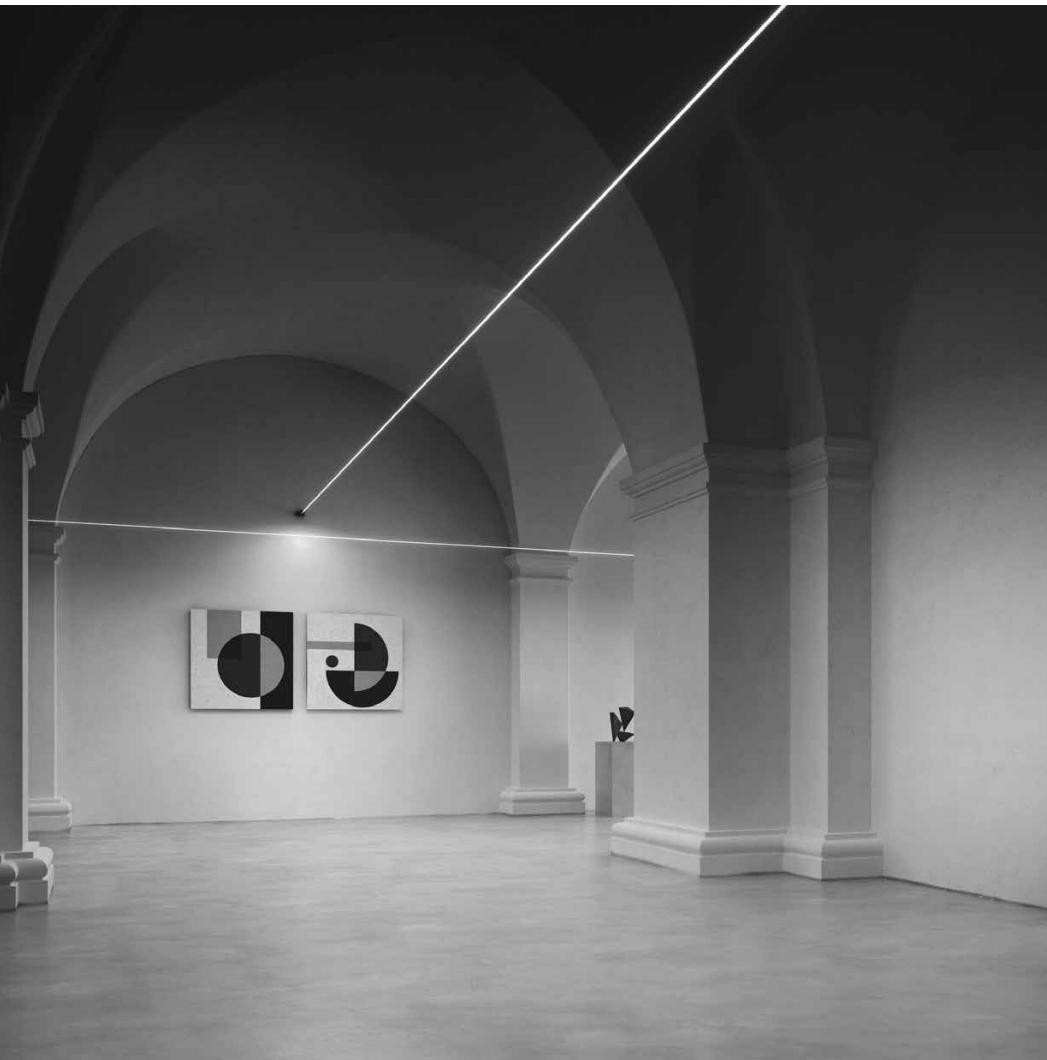


The sizes are expressed in millimeters / inches.

DESIGN DAVIDE GROPPÌ - 2017
WALL LAMP - METAL



FLASH 12

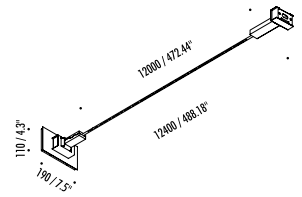

1A2150403.27.05	MATT BLACK - 2700K - DIM	FLASH 12 - REMOTE KIT 24 V DC - MAX 90 W LED 2700K - 11184 lm - CRI > 90 / 3000K - 11400 lm - CRI > 90 LED MODULE 12 m / 472.44" LONG - HARMONIC STEEL STRIP 10 mm / 0.39" WIDE CAN BE CUT EVERY 48,3 mm / 1.90" - LENGTHS AVAILABLE ON REQUEST 18 m - 24 m / 708.66" - 944.88" INCLUDES INDEPENDENT POWER SUPPLY KIT INPUT 120 V - 60 Hz DALI - PUSH - 0/1-10 V - TRIAC/IGBT DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED
1A2150403.30.05	MATT BLACK - 3000K - DIM	
1A2150403.27.06	MATT BLACK - 2700K	FLASH 12 - PLUG KIT 24 V DC - MAX 90 W LED 2700K - 11184 lm - CRI > 90 / 3000K - 11400 lm - CRI > 90 LED MODULE 12 m / 472.44" LONG - HARMONIC STEEL STRIP 10 mm / 0.39" WIDE CAN BE CUT EVERY 48,3 mm / 1.90" - LENGTHS AVAILABLE ON REQUEST 18 m - 24 m / 708.66" - 944.88" INCLUDES INDEPENDENT POWER SUPPLY KIT WITH PLUG INPUT 120 V - 60 Hz DIMMER OPTIONAL ACCESSORIES NOT INCLUDED
1A2150403.30.06	MATT BLACK - 3000K	

IIPL



PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038



P. 323 467 5635
F. 323 467 5634

FLASH

REMOTE POWER SUPPLY KIT

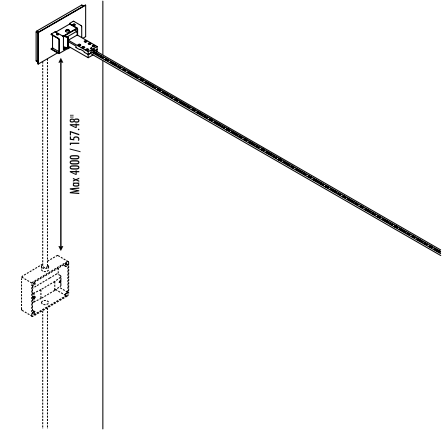

POWER SUPPLY KIT WITH PLUG




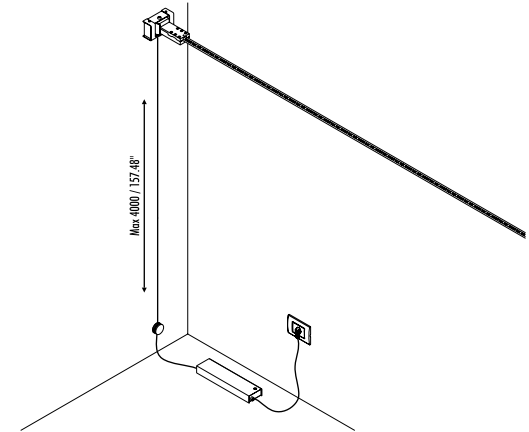
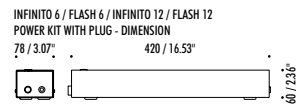




INFINITO / FLASH

FLASH




OPTIONAL ACCESSORIES


1A000400.00.00	MATT BLACK	CEILING CONNECTION KIT	
1A3440303.00.00	MATT WHITE	WALL AND CEILING ROSE COMPULSORY FOR CEILING ELECTRICAL CONNECTIONS	
1A3440403.00.00	MATT BLACK		
1A0120400.00.00	MATT BLACK	KIT WALL CONNECTION VERTICAL SLOPED 45°	
1A0340400.00.00	MATT BLACK	KIT WALL CONNECTION SLOPED RIGHT 75°	
1A0350400.00.00	MATT BLACK	KIT WALL CONNECTION SLOPED LEFT 75°	
1A0290400.00.00	MATT BLACK	SWALLOWS FOR INFINITO ONLY	
1A0800400.00.00	MATT BLACK	SWALLOWS FOR FLASH ONLY	

FLASH


1A0080400.00.00 - CEILING CONNECTION KIT

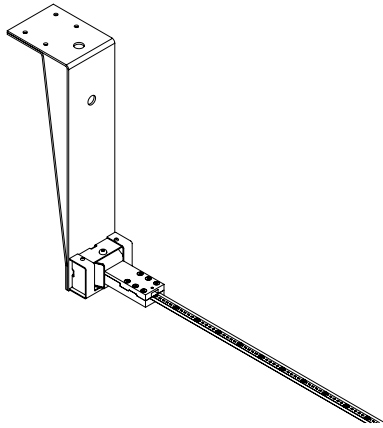

1A0120400.00.00 - KIT WALL CONNECTION VERTICAL SLOPED 45°

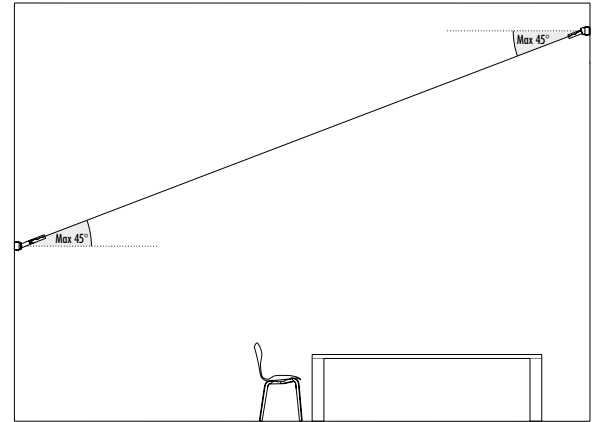

1A0080400.00.00 - CEILING CONNECTION KIT + 1A0120400.00.00 - KIT WALL CONNECTION VERTICAL SLOPED 45°

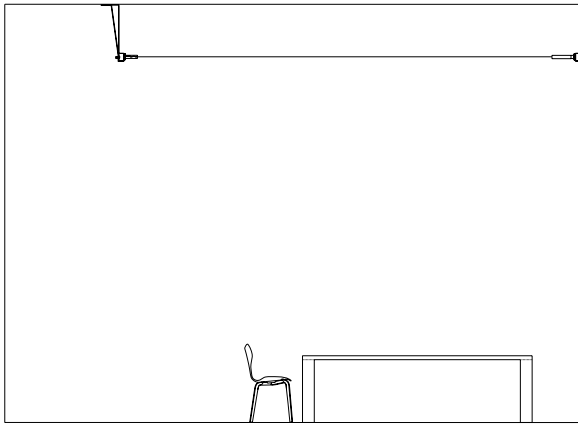

1A0340400.00.00 - 1A0350400.00.00 KIT WALL CONNECTION SLOPED 75°

