



TWIG LITE

The twig light has a subtle appearance, which allows it to blend in to foliage. The fixture has a frosted glass lens and small open inserts to reduce glare. Remote transformer required.

DETAILS.

FINISHES AVAILABLE IN:

SOLID COPPER

316 STAINLESS STEEL

SIZE: Ø1" X 31 1/2" H

RETRO BASE: Ø2 1/2"

MAX 700MA, CRI 90

COLOR TEMPS AVAILABLE:

2700K, 3000K, 4000K

BEAM ANGLE: ASYMMETRIC

POWER OPTIONS:

S - SERIES, REMOTE DRIVER

D3 - 12V AC, 1W INTEGRAL DRIVER

D7 - 12V AC, 2W INTEGRAL DRIVER

R - RETRO, 110/240V DRIVER


*REMOTE DRIVER WIRED IN SERIES. INTERNAL DRIVER WIRED IN PARALLEL.

IP44 - RATED FOR WET LOCATIONS.

*OTHER ACCESSORIES AND LAMP OPTIONS AVAILABLE.

UL LISTED

TWIG LITE

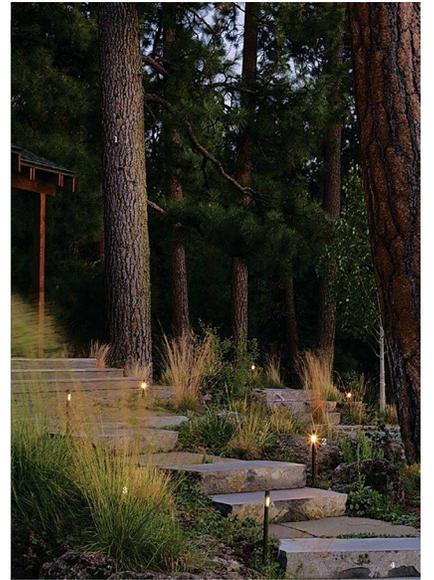


Twig Lite

PURELED SPECIFICATIONS

| | |
|----------------------------|--|
| LED Chip | Cree XPG-3 Plug and Play field replaceable LED board |
| Luminaire Output | 120 Lumens @ 700mA (2 watts), delivered from luminaire with unobstructed beam. |
| Lumens Per Watt | 60 Lumens minimum @ 2 watts, delivered from luminaire with unobstructed beam |
| CRI (3000K) | 90+ |
| Colour Temperatures | 2700K, 3000K, 4000K |
| Beam Angles | Asymmetric |
| Ingress Protection | IP44 |


| | |
|------------------|---|
| Warranty | Electronics = 5 years Body Cop/SS = 10 years |
| Standards | AS/NZS 61046 cUL 1838, 2108 CSA C22.2 No.250.7, No.250.0-08 CE |

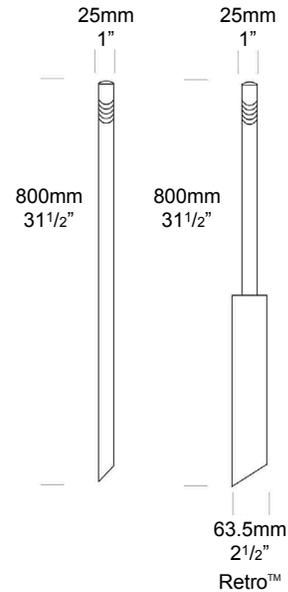

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. TG/L

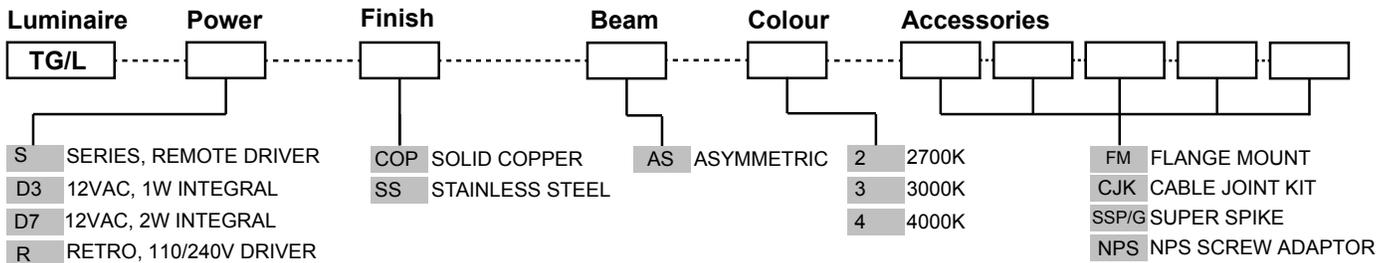

SERIES, REMOTE DRIVER REQUIRED:
Constant current driver
Individual fixtures require 3vdc @ 700mA maximum
12VAC INTEGRAL DRIVER:
Hunza Buckbullet driver (included)
Input: 12VAC, 2watt total
Output: 3vdc @ D3=350mA, D7=700mA
110/240VAC RETRO DRIVER:
Input: 120/240vac, 2 watt total (included)
Output: 3vdc, 700mA (non dimming)

OTHER LAMP OPTIONS

TG /H - G4 Halogen 12V Lamp
TG /GL - G4 LED Retrofit 12V Lamp (lamps vary by market - please refer to supplier for details)

[Click here for halogen specification sheet](#)

[Click here for 240v Remote Power Supply Guidance Charts](#)

[Click here for USA Remote Power Supply Guidance Charts](#)

LUMINAIRE CONSTRUCTION

CNC machined from one of the following

metals:

Copper

Pole: solid copper 25.4mm (1") rod.

End cap: solid copper 25.4mm (1") rod.

316 Stainless Steel

Pole: 316 stainless steel 25.4mm (1") rod.

End cap: 316 stainless steel 25.4mm (1") rod.

Lens:

22mm (3/4") extra clear low iron flush fit shatter resistant glass tube.

Lifetime warranty.

Gaskets:

Silicone, iron impregnated 220°C (428°F).

Mounting

The pole 800mm (31½") is directly mounted into the earth or concrete. For extra stability in sand or loose ground use the Super Spike. Flange Mount option is available for hard surfaces.

Luminaire Weight:

Low voltage

Cop: 0.800kg (1lb 12oz)


SS: 0.800kg (1lb 12oz)

Retro™


Cop: 1.980kg (4lb 6oz)

SS: 1.980kg (4lb 6oz)


ACCESSORIES



Flange Mount



Super Spike



NPS 1/2"
Screw Mount Adaptor


BEAM ANGLES

High efficiency PMMA TIR lenses. Field replaceable

IES files available for download: hunzalighting.com/downloads


WIRING GUIDE

Series/remote driver

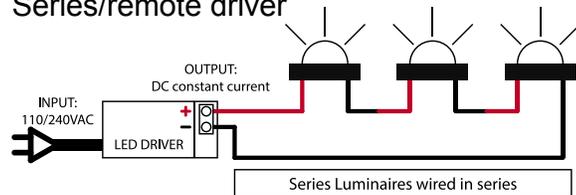

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

12v integral driver

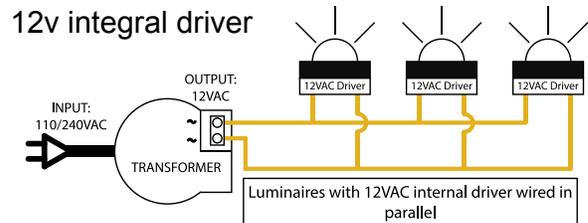

Available for download: hunzalighting.com/downloads