



NULL A 25 EXTRADARK

Recessed ceiling lamp where its sole objective is to hide and give all the attention to whatever it is lighting. Features removable luminaire for maintenance. Accessible from below. Title 24 version available.

DETAILS.

VISIBLE HOLE: 1" Ø X 5.7" H

COMPULSORY INSTALL KIT + LED DRIVER REQ. 120V; 0/1-10V DIMMABLE

MAX DISTANCE: 49FT (15000MM)

EXTRADARK:

MINIMUM SPACE FOR MOUNTING: 7.5"H X 17.5" W

24V DC - 6.5W LED CRI 90

23° - 2700K 228LM -OR- 3000K 245LM

32° - 2700K 288LM -OR- 3000K 310LM

T24 VERSION:

MINIMUM SPACE FOR MOUNTING: 6.3"H X 4.7" W

MAX 500MA DC- 5.6W LED CRI 90, 357LM

2700K -OR- 3000K





UL LISTED

RATED FOR IC-HOUSING

IP20 RATED FOR DAMP/DRY LOCATIONS

*IP65 RATED WITH IP65 PLASTERBOARD FLANGE.

NULLA 25 EXTRADARK

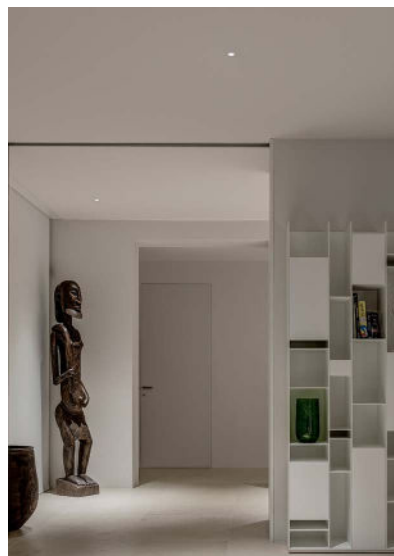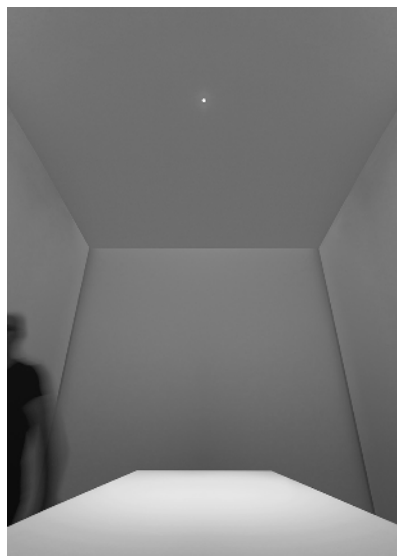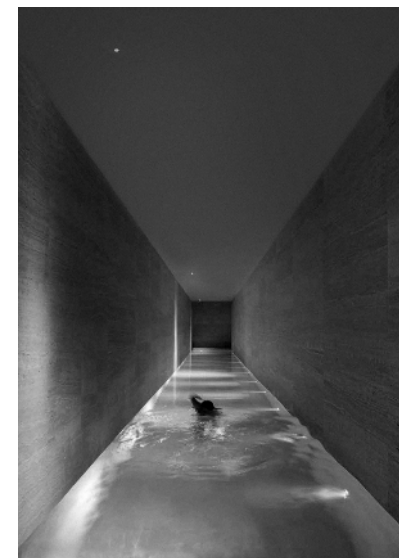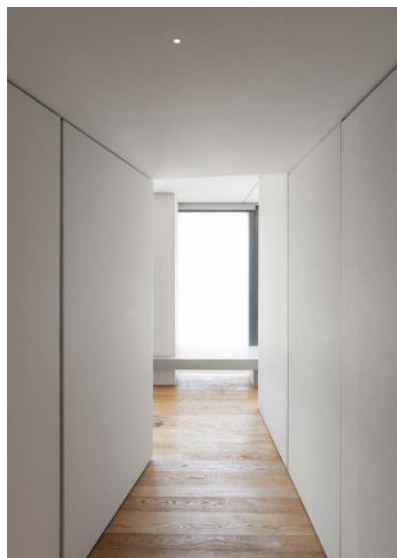





II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

NULLA 25 EXTRADARK

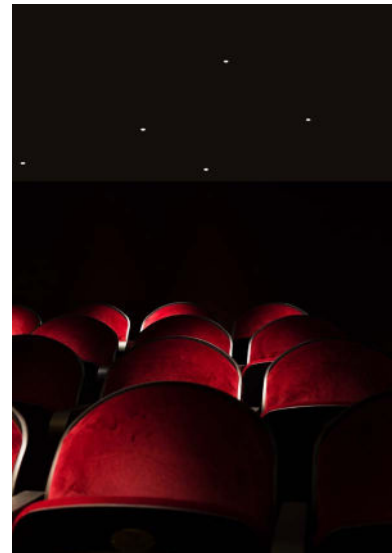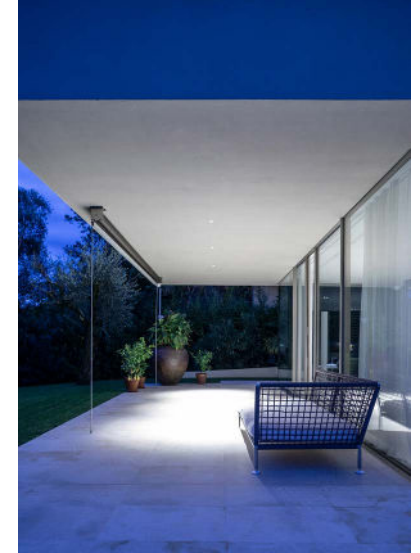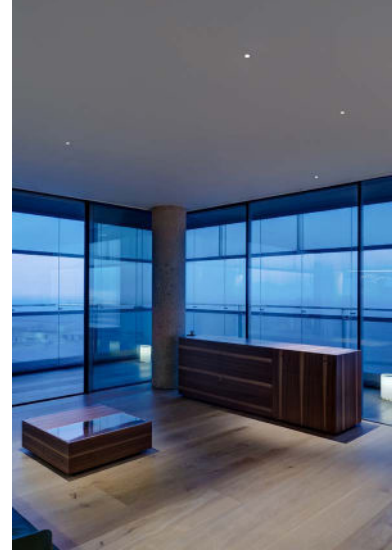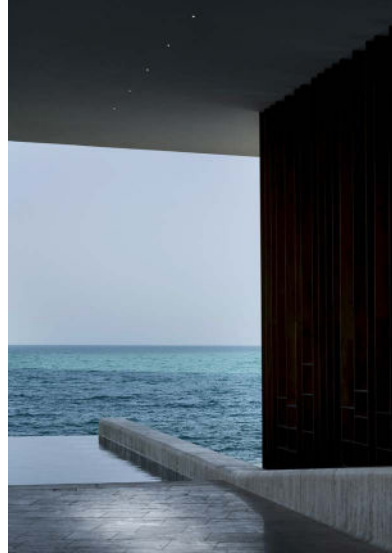

II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

NULLA 25 EXTRADARK



II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM


The sizes are expressed in millimeters / inches.

EXTRADARK LUMINAIRE

DESIGN DAVIDE GROPPI - 2010
RECESSED CEILING LAMP - METAL



IP20/IP65



1A4080003.27.20	STANDARD - 2700K - BEAM 23°	24 V DC - 6,5 W LED - UGR <19 2700K - 228 lm - CRI >90 / 3000K - 245 lm - CRI >90 - BEAM 23° VISIBLE HOLE Ø 25 mm / 0.98" - LUMINAIRE REMOVABLE FOR MAINTENANCE COMPULSORY INSTALLATION KIT NOT INCLUDED DRIVER NOT INCLUDED
1A4080003.30.20	STANDARD - 3000K - BEAM 23°	
1A2020003.27.20	STANDARD - 2700K - BEAM 32°	24 V DC - 6,5 W LED - UGR <19 2700K - 288 lm - CRI >90 / 3000K - 310 lm - CRI >90 - BEAM 32° VISIBLE HOLE Ø 25 mm / 0.98" - LUMINAIRE REMOVABLE FOR MAINTENANCE COMPULSORY INSTALLATION KIT NOT INCLUDED DRIVER NOT INCLUDED
1A2020003.30.20	STANDARD - 3000K - BEAM 32°	

COMPULSORY INSTALLATION KITS

1A2170400.00.00	MATT BLACK	PLASTERBOARD FLANGE 12,5 mm / 0.49" PLASTERBOARD CUT-OUT Ø 35 mm / 1.37" - MINIMUM SPACE FOR MOUNTING 190 mm / 7.48"
1A3980400.00.00	MATT BLACK - IP65	PLASTERBOARD FLANGE 12,5 mm / 0.49" PLASTERBOARD CUT-OUT Ø 35 mm / 1.37" - MINIMUM SPACE FOR MOUNTING 190 mm / 7.48"

OPTIONAL INSTALLATION KITS



1A2380000.00.00	STANDARD	PLASTER BOX DIMENSIONS 189 x 445 mm / 7.44" x 17.51"

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634


NULLA 25

NULLA 25 EXTRADARK

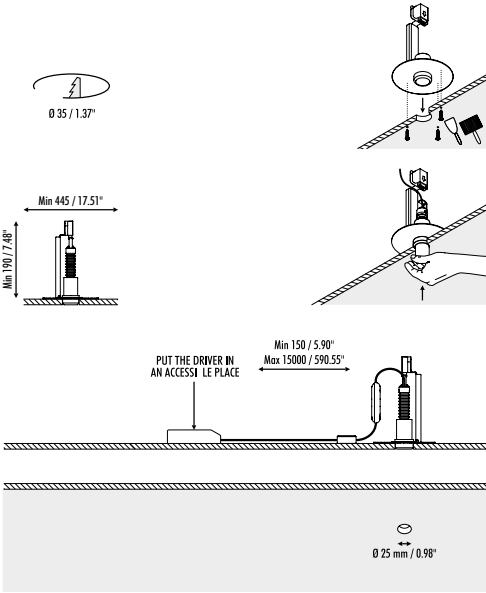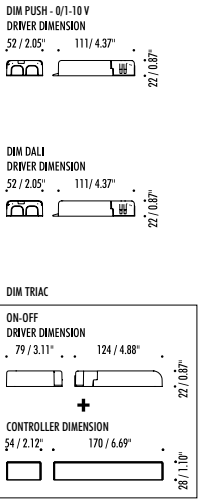

COMPULSORY INSTALLATION KITS		
120240870.24	STANDARD	DRIVER INPUT (110-127 V) 120 V - 60 Hz - OUTPUT 24 V DC - (15 W) 20 W - IP20 PUSH - 0/1-10 V DIMMABLE
120241180.24	STANDARD	DRIVER INPUT (110-127 V) 120 V - 60 Hz - OUTPUT 24 V DC - (15 W) 16 W - IP20 DALI DIMMABLE
COMPULSORY INSTALLATION KITS FOR TRIAC DIMMING: DRIVER 120240410 + CONTROLLER 120000034		
120240410	STANDARD	DRIVER INPUT (110-127 V) 120 V - 60 Hz - OUTPUT 24 V DC - (12 W) 22 W - IP20 NOT DIMMABLE
120000034	STANDARD	CONTROLLER DIMMABLE DALI - PUSH - TRIAC - 1-10 V - IP20

NULLA 25 T24

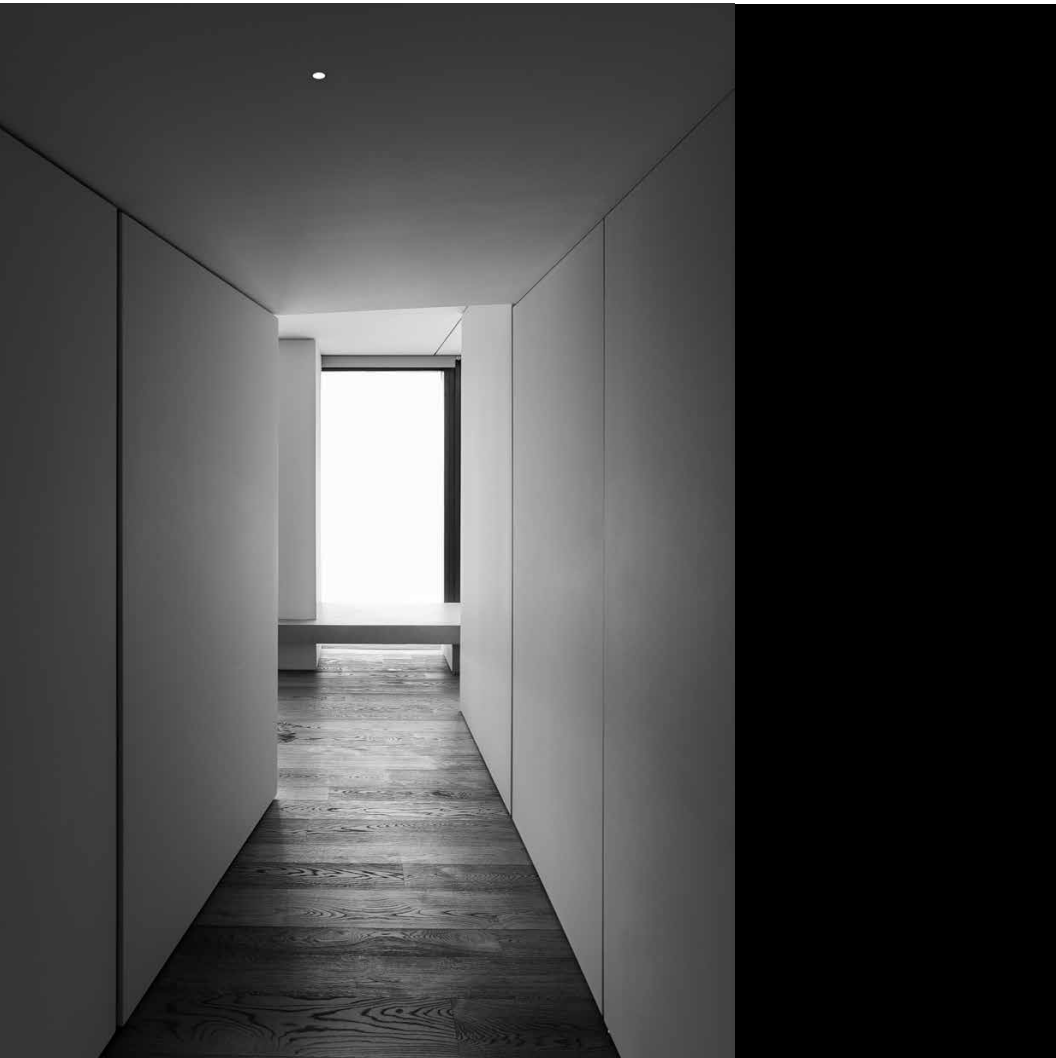

II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634


The sizes are expressed in millimeters / inches.

DESIGN DAVIDE GROPPPI - 2019
RECESSED CEILING LAMP - METAL



IP20/IP65


NULLA 25 T24



1A1010003-27	STANDARD TITLE 24 - 2700K	MAX 500 mA DC - 5.6 W LED 2700K - 357 lm - CRI > 90 / 3000K - 357 lm - CRI > 90
1A1010003	STANDARD TITLE 24 - 3000K	VISIBLE HOLE Ø 25 mm / 0.98" - LUMINAIRE REMOVABLE FOR MAINTENANCE
		COMPULSORY INSTALLATION KIT NOT INCLUDED
		DRIVER LED NOT INCLUDED (PER MIN 2 UNITS - MAX 4 UNITS)


COMPULSORY INSTALLATION KITS		
520000100	STANDARD TITLE 24	DRIVER LED (PER MIN 2 UNITS - MAX 4 UNITS) INPUT 120 V - 60 Hz - OUTPUT 500 mA DC - 50 W - IP20 1-10 V DIMMABLE

NULL A 25 T24

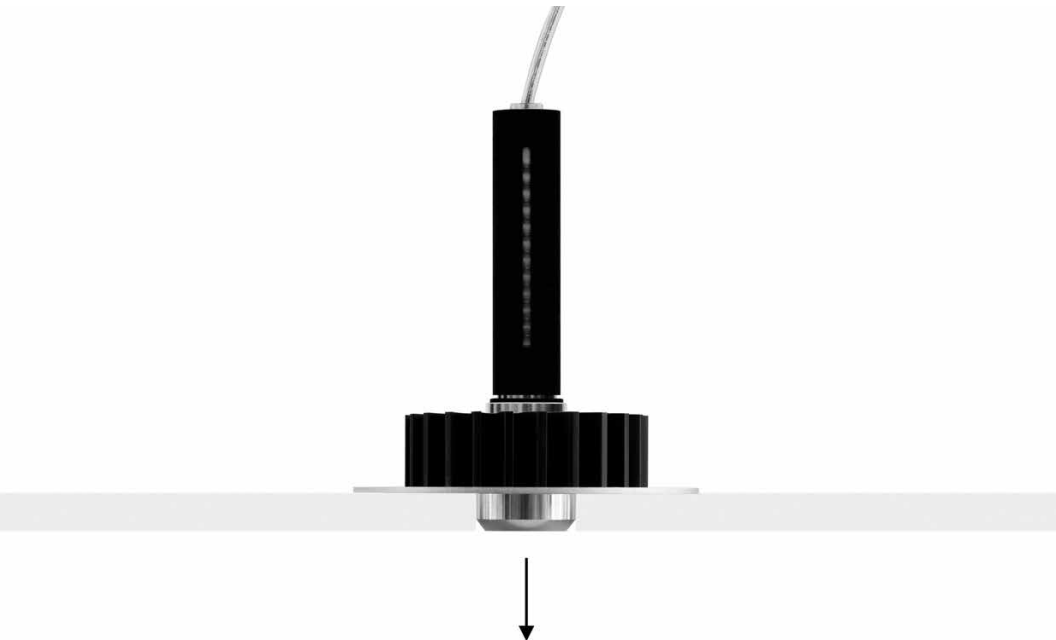

LUMINAIRE REMOVABLE FOR MAINTENANCE

DIM 1-10 V - T24
DRIVER DIMENSION
76 / 2.99" 152 / 5.98"
30° / 1.18"

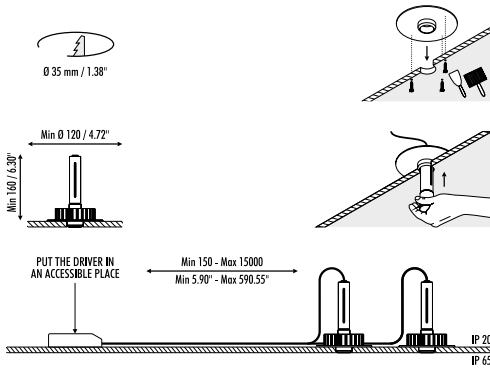

COMPULSORY INSTALLATION KITS		
18250003	STANDARD	PLASTERBOARD FLANGE 12,5 mm / 0.49"
		PLASTERBOARD CUT-OUT Ø 35 mm / 1.37" - MINIMUM SPACE FOR MOUNTING 160 mm / 6.30"