



## NULLA 25 EXTRADARK

Recessed ceiling lamp where its sole objective is to hide and give all the attention to whatever it is lighting. Features removable luminaire for maintenance. Accessible from below. Title 24 version available.

### DETAILS.

VISIBLE HOLE: 1" Ø X 5.7" H

COMPULSORY INSTALL KIT + LED DRIVER REQ. 120V; 0/1-10V DIMMABLE

MAX DISTANCE: 49FT (15000MM)

### EXTRADARK:

MINIMUM SPACE FOR MOUNTING: 7.5"H X 17.5" W

24V DC - 5W LED CRI 90

23° - 2700K 228LM -OR- 3000K 245LM

32° - 2700K 288LM -OR- 3000K 310LM

### T24 VERSION:

MINIMUM SPACE FOR MOUNTING: 6.3"H X 4.7" W

MAX 500MA DC- 5.6W LED CRI 90, 357LM

2700K -OR- 3000K




### ETL LISTED

RATED FOR IC-HOUSING

IP20 RATED FOR DAMP/DRY LOCATIONS

\*IP65 RATED WITH IP65 PLASTERBOARD FLANGE.

NULLA 25 EXTRADARK

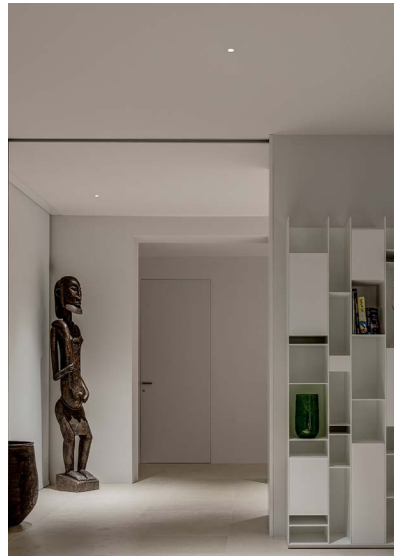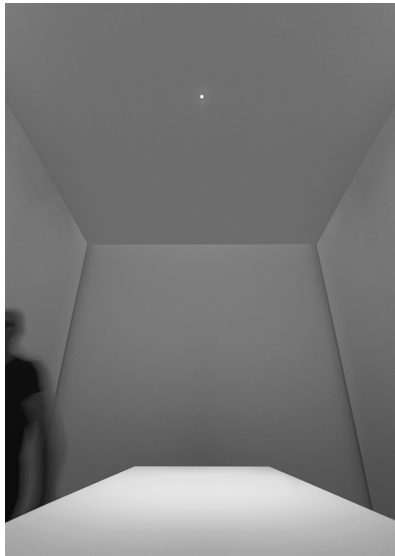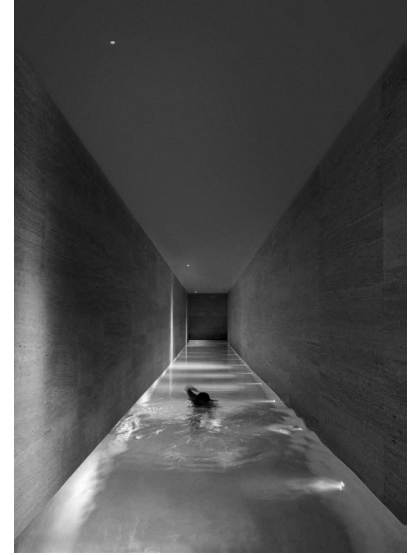






II PL

PLUGLIGHTING.COM  
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE  
STE 108 LOS ANGELES 90038

P. 323 467 5635  
F. 323 467 5634

NULLA 25 EXTRADARK

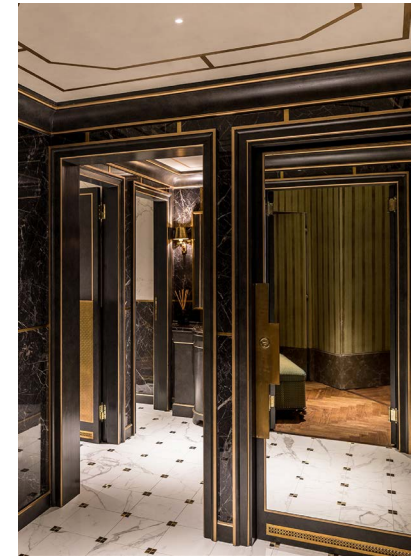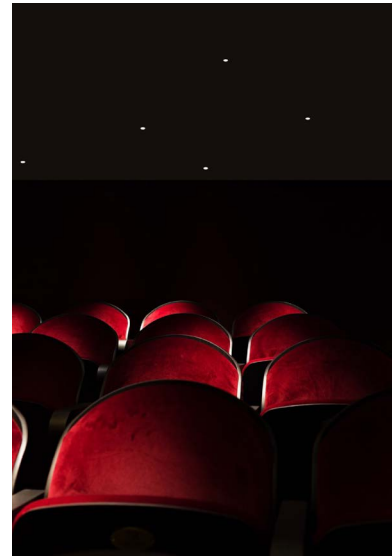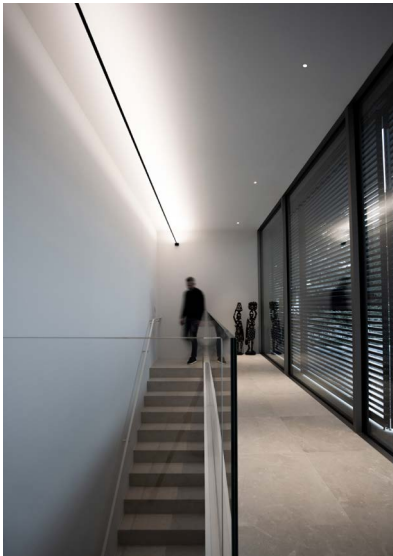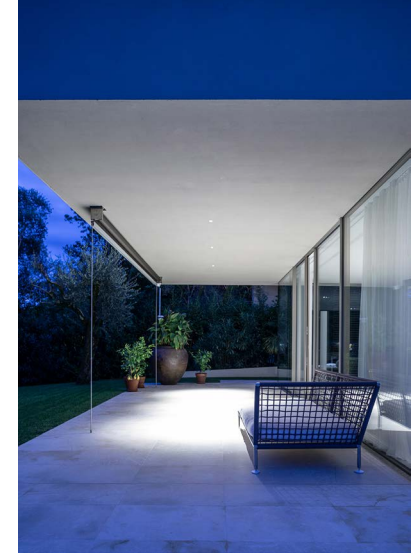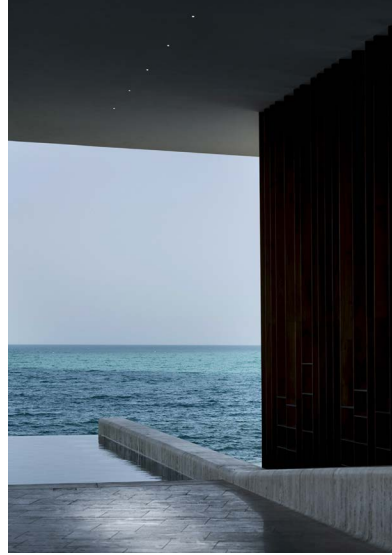

**IIPL**

PLUGLIGHTING.COM  
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE  
STE 108 LOS ANGELES 90038

P. 323 467 5635  
F. 323 467 5634

# NULLA 25 EXTRADARK


NULLA

## NULLA

Recessed / Direct / Indoor

Material Metal  
Finish .00 Standard


Note Luminaire with Extradark comfort system - NULLA and NULLA 18: visible hole Ø 0.71" - NULLA 25: visible hole Ø 0.98" - NULLA 18 and NULLA 25: luminaire removable for maintenance.



**NULLA - BEAM 23°**  
9W  
24V DC  
2700K - 304lm / 3000K - 327lm  
Beam 23°  
CRI >90  
UGR <19  
Driver not included

Standard - 2700K  
Standard - 3000K

| 1A4100003.27.20 |  
| 1A4100003.30.20 |



**NULLA - BEAM 32°**  
9W  
24V DC  
2700K - 384lm / 3000K - 413lm  
Beam 32°  
CRI >90  
UGR <19  
Driver not included

Standard - 2700K  
Standard - 3000K

| 1A2110003.27.20 |  
| 1A2110003.30.20 |



**NULLA 18 - BEAM 20°**  
3W  
24V DC  
2700K - 162lm / 3000K - 173lm  
Beam 20°  
CRI >90  
UGR <19  
Driver not included

Standard - 2700K  
Standard - 3000K

| 1A2010003.27.20 |  
| 1A2010003.30.20 |



**NULLA 25 - BEAM 23°**  
5W  
24V DC  
2700K - 228lm / 3000K - 245lm  
Beam 23°  
CRI >90  
UGR <19  
Driver not included

Standard - 2700K  
Standard - 3000K

| 1A4080003.27.20 |  
| 1A4080003.30.20 |



**NULLA 25 - BEAM 32°**  
5W  
24V DC  
2700K - 288lm / 3000K - 310lm  
Beam 32°  
CRI >90  
UGR <19  
Driver not included

Standard - 2700K  
Standard - 3000K

| 1A2020003.27.20 |  
| 1A2020003.30.20 |



**NULLA 25 T24**  
5,6W  
Max 500mA DC  
3000K - 357lm / 2700K - 357lm  
CRI >90  
Driver not included

Standard - 2700K  
Standard - 3000K

| 1A1010003-27 |  
| 1A1010003 |

The sizes are expressed in inches.






# NULLA 25 EXTRADARK

## NULLA




Davide Groppi / 2010

### Compulsory accessories

#### Installation kit

	<b>Plasterboard flange 0.49"</b>			Not included
	Matt Black	Cut-out Ø 0.83" - Minimum space for mounting 3.94" - IP65	NULLA	1A2200400.00.00
	<b>Plasterboard flange 0.49"</b>			Not included
		Cut-out Ø 0.87" - Minimum space for mounting 7.48"	NULLA 18	1A2210400.00.00
	<b>Plasterboard flange 0.49"</b>			Not included
	Matt Black	Cut-out Ø 1.38" - Minimum space for mounting 7.48"	NULLA 25	1A2170400.00.00
	<b>Plasterboard flange 0.49"</b>			Not included
	Matt Black	Cut-out Ø 1.38" - Minimum space for mounting 7.48"	NULLA 25	1A3980400.00.00
	<b>Plasterboard flange 0.49"</b>			Not included
		Cut-out Ø 1.38" - Minimum space for mounting 6.30"	NULLA 25 T24	18250003

#### Electrical power supply

	<b>Driver LED</b>			Not included
	220-240V(100-127V)	24V/20W(15W)/IP20/PUSH	NULLA / NULLA 18 / NULLA 25	1Z0240870.24
	<b>Driver LED</b>			Not included
	220-240V(100-127V)	24V/16W(15W)/IP20/DALI	NULLA / NULLA 18 / NULLA 25	1Z0241180.24
	<b>Driver LED</b>			Not included
	120-277V	24V/60W/IP20/TRIAC - 1-10V	NULLA / NULLA 18 / NULLA 25	1Z2020040

The sizes are expressed in inches.

**I I P L**





PLUGLIGHTING.COM  
INFO@PLUGLIGHTING.COM

Davide Groppi / 2010

## NULLA

### Optional accessories

#### Installation kit

	<b>Trapdoor for plasterboard 0.49"</b>			Not included
	Standard	Cut-out 7.87" x 7.87"	NULLA	1A3780000.00.00
	<b>Trapdoor for plasterboard 0.49"</b>			Not included
	Standard	Cut-out 15.75" x 15.75"	NULLA	1A3790000.00.00
	<b>Masonry Box</b>			Not included
		Dimensions 7.44" x 17.52"	NULLA 18	1A2390000.00.00
	<b>Masonry Box</b>			Not included
		Dimensions 7.44" x 17.52"	NULLA 25	1A2380000.00.00

5665 MELROSE AVENUE  
STE 108 LOS ANGELES 90038

P. 323 467 5635  
F. 323 467 5634