



NULLA 25 EXTRADARK

Recessed ceiling lamp where its sole objective is to hide and give all the attention to whatever it is lighting. Features removable luminaire for maintenance. Accessible from below. Title 24 version available.

DETAILS.

VISIBLE HOLE: 1" Ø X 5.7" H

COMPULSORY INSTALL KIT + LED DRIVER REQ. 120V; 0/1-10V DIMMABLE

MAX DISTANCE: 49FT (15000MM)

EXTRADARK:

MINIMUM SPACE FOR MOUNTING: 7.5"H X 17.5" W

24V DC - 5W LED CRI 90

23° - 2700K 228LM -OR- 3000K 245LM

32° - 2700K 288LM -OR- 3000K 310LM

T24 VERSION:

MINIMUM SPACE FOR MOUNTING: 6.3"H X 4.7" W

MAX 500MA DC- 5.6W LED CRI 90, 357LM

2700K -OR- 3000K





ETL LISTED

RATED FOR IC-HOUSING

IP20 RATED FOR DAMP/DRY LOCATIONS

*IP65 RATED WITH IP65 PLASTERBOARD FLANGE.

NULLA 25 EXTRADARK

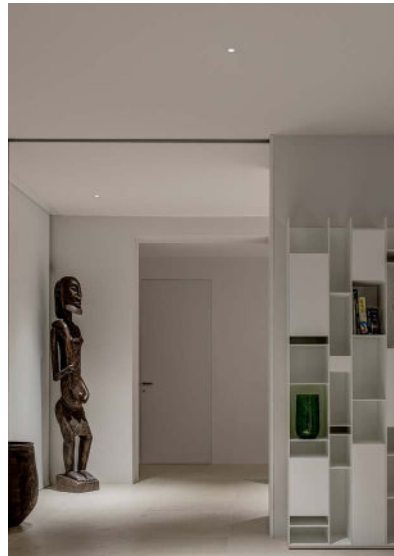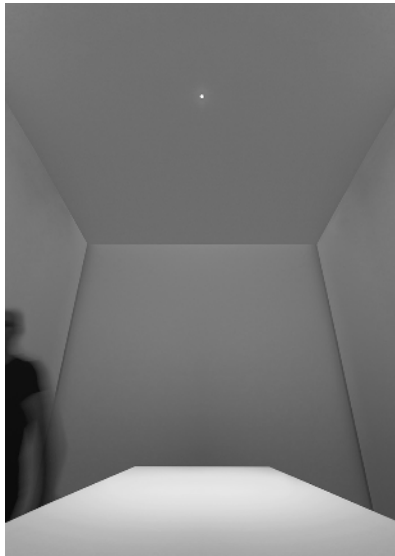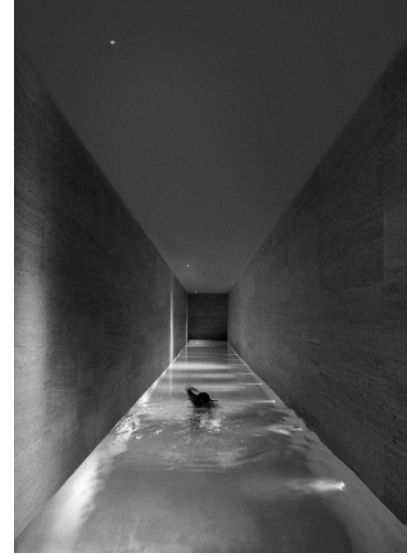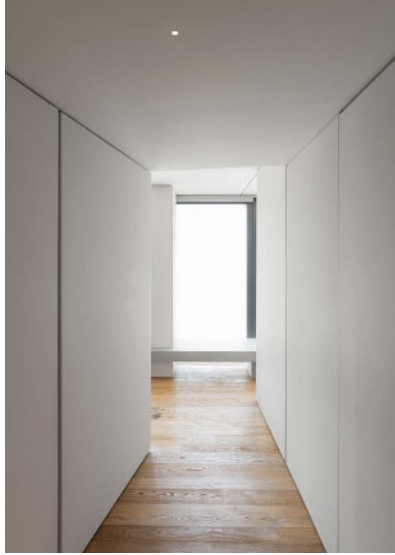




II PL

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

NULLA 25 EXTRADARK

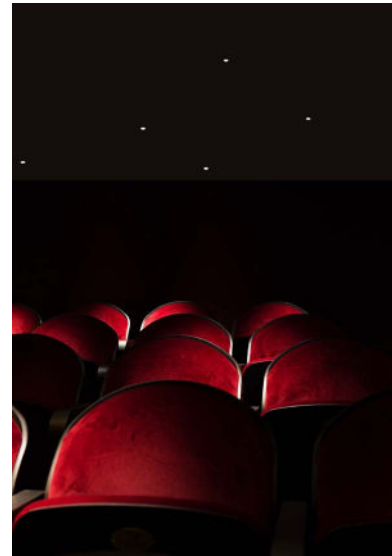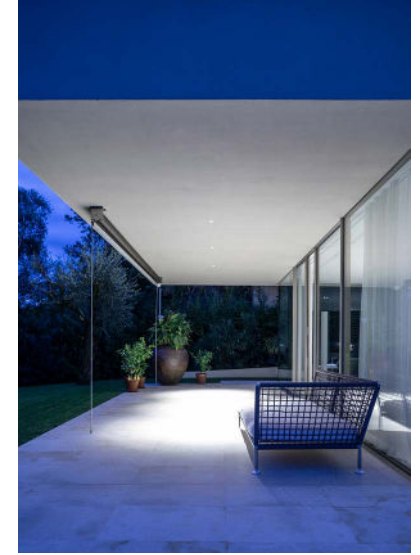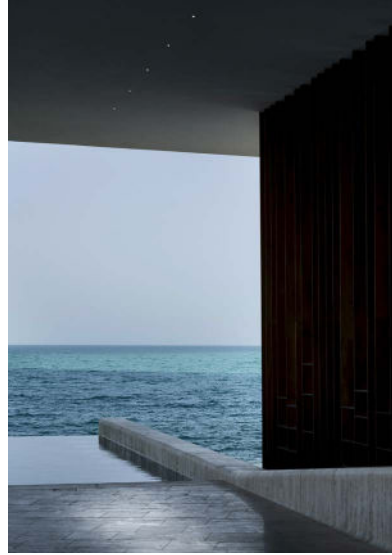

IIPL

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

NULLA 25 EXTRADARK


NULLA

NULLA

Recessed / Direct / Indoor

Material Metal
Finish .00 Standard


Note Luminaire with Extradark comfort system - NULLA and NULLA 18: visible hole Ø 0.71" - NULLA 25: visible hole Ø 0.98" - NULLA 18 and NULLA 25: luminaire removable for maintenance.



NULLA - BEAM 23°
9W
24V DC
2700K - 304lm / 3000K - 327lm
Beam 23°
CRI >90
UGR <19
Driver not included

Standard - 2700K
Standard - 3000K

| 1A4100003.27.20 |
| 1A4100003.30.20 |



NULLA - BEAM 32°
9W
24V DC
2700K - 384lm / 3000K - 413lm
Beam 32°
CRI >90
UGR <19
Driver not included

Standard - 2700K
Standard - 3000K

| 1A2110003.27.20 |
| 1A2110003.30.20 |



NULLA 18 - BEAM 20°
3W
24V DC
2700K - 162lm / 3000K - 173lm
Beam 20°
CRI >90
UGR <19
Driver not included

Standard - 2700K
Standard - 3000K

| 1A2010003.27.20 |
| 1A2010003.30.20 |



NULLA 25 - BEAM 23°
5W
24V DC
2700K - 228lm / 3000K - 245lm
Beam 23°
CRI >90
UGR <19
Driver not included

Standard - 2700K
Standard - 3000K

| 1A4080003.27.20 |
| 1A4080003.30.20 |



NULLA 25 - BEAM 32°
5W
24V DC
2700K - 288lm / 3000K - 310lm
Beam 32°
CRI >90
UGR <19
Driver not included

Standard - 2700K
Standard - 3000K

| 1A2020003.27.20 |
| 1A2020003.30.20 |



NULLA 25 T24
5,6W
Max 500mA DC
3000K - 357lm / 2700K - 357lm
CRI >90
Driver not included

Standard - 2700K
Standard - 3000K

| 1A1010003-27 |
| 1A1010003 |

The sizes are expressed in inches.






NULLA 25 EXTRADARK

NULLA




Davide Groppi / 2010

Compulsory accessories

Installation kit

	Plasterboard flange 0.49"		Not included
Matt Black	Cut-out Ø 0.83" - Minimum space for mounting 3.94" - IP65	NULLA	1A2200400.00.00
	Plasterboard flange 0.49"		Not included
	Cut-out Ø 0.87" - Minimum space for mounting 7.48"	NULLA 18	1A2210400.00.00
	Plasterboard flange 0.49"		Not included
Matt Black	Cut-out Ø 1.38" - Minimum space for mounting 7.48"	NULLA 25	1A2170400.00.00
	Plasterboard flange 0.49"		Not included
Matt Black	Cut-out Ø 1.38" - Minimum space for mounting 7.48"	NULLA 25	1A3980400.00.00
	Plasterboard flange 0.49"		Not included
	Cut-out Ø 1.38" - Minimum space for mounting 6.30"	NULLA 25 T24	18250003

Electrical power supply

	Driver LED		Not included
220-240V(100-127V)	24V/20W(15W)/IP20/PUSH	NULLA / NULLA 18 / NULLA 25	1Z0240870.24
	Driver LED		Not included
220-240V(100-127V)	24V/16W(15W)/IP20/DALI	NULLA / NULLA 18 / NULLA 25	1Z0241180.24
	Driver LED		Not included
120-277V	24V/60W/IP20/TRIAC - 1-10V	NULLA / NULLA 18 / NULLA 25	1Z2020040

The sizes are expressed in inches.

I I P L





PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

Davide Groppi / 2010

NULLA

Optional accessories

Installation kit

	Trapdoor for plasterboard 0.49"		Not included
Standard	Cut-out 7.87" x 7.87"	NULLA	1A3780000.00.00
	Trapdoor for plasterboard 0.49"		Not included
Standard	Cut-out 15.75" x 15.75"	NULLA	1A3790000.00.00
	Masonry Box		Not included
	Dimensions 7.44" x 17.52"	NULLA 18	1A2390000.00.00
	Masonry Box		Not included
	Dimensions 7.44" x 17.52"	NULLA 25	1A2380000.00.00

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634