



NULLA 25

Recessed ceiling lamp with removable luminaire for maintenance. Accessible from below. Available in 2700K.

DETAILS.

VISIBLE HOLE 1" Ø

4.7" W X 6" L

6 W LED 3000K 392LM

LED DRIVER INCLUDED 100-240V; 1-10V DIMMABLE

500 MA DC






MAX DISTANCE: 49FT (15000MM)

ETL LISTED

RATED FOR IC-HOUSING

IP65 RATED

NULLA 25

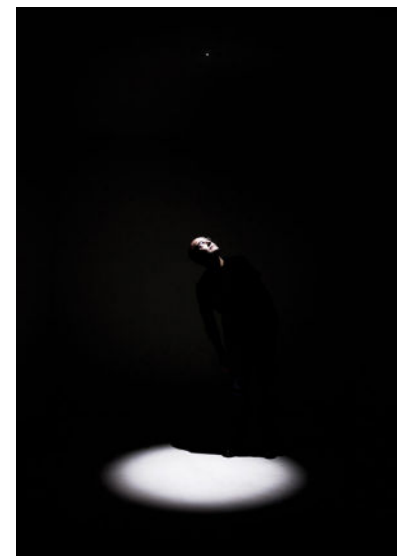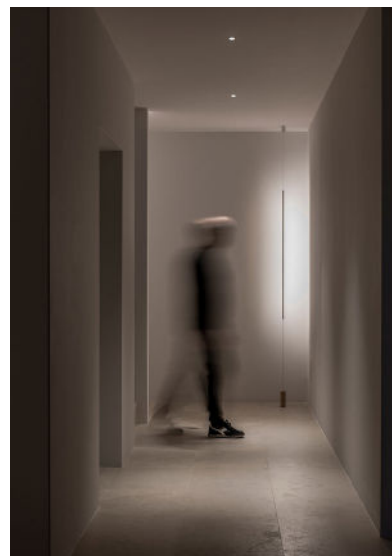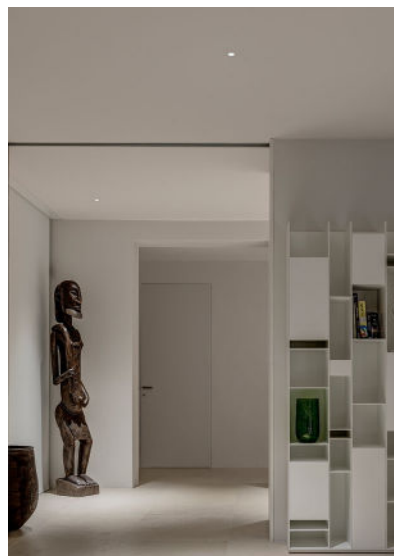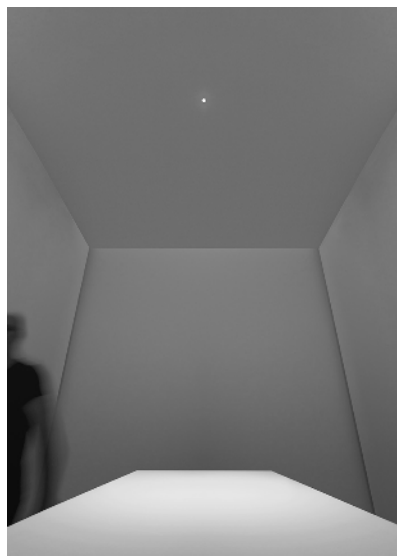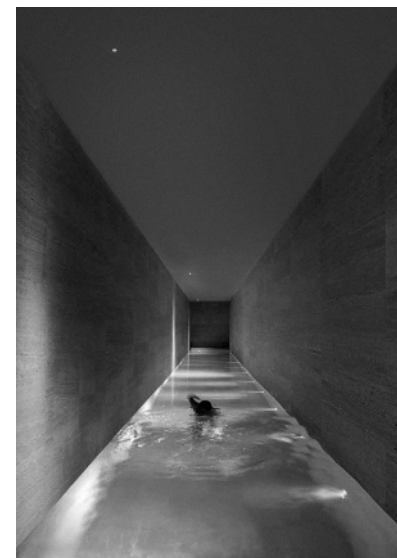







II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

NULLA 25

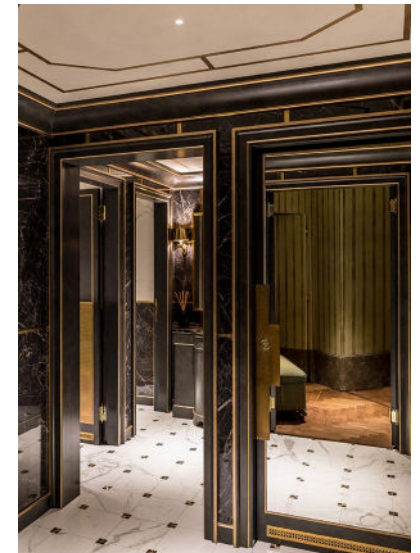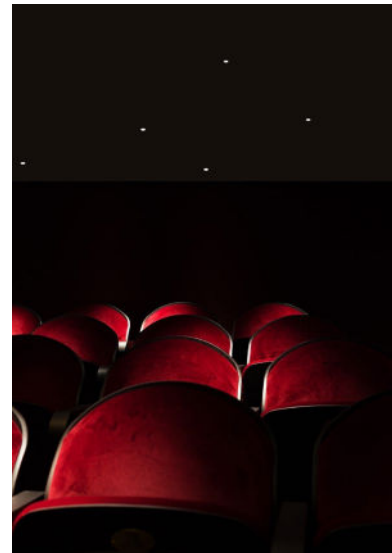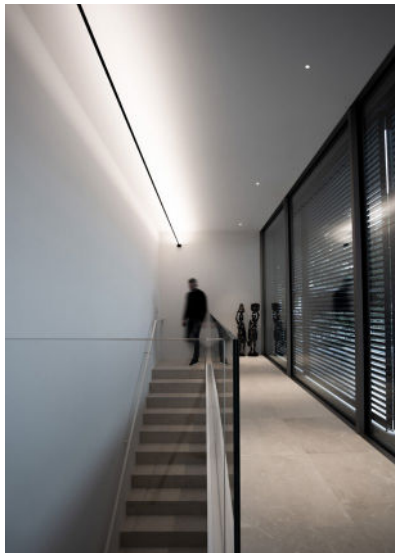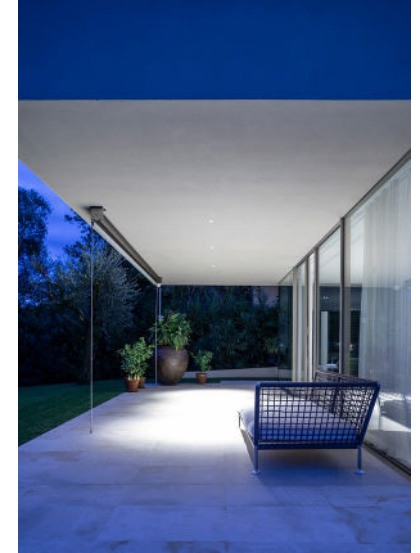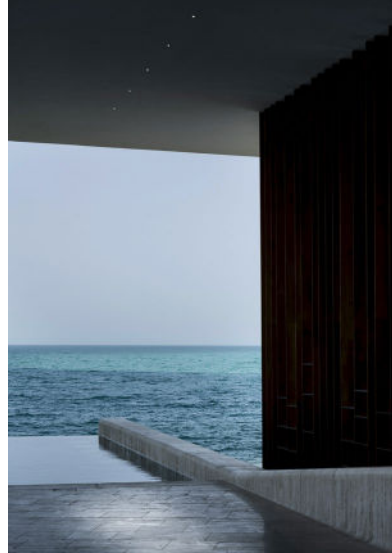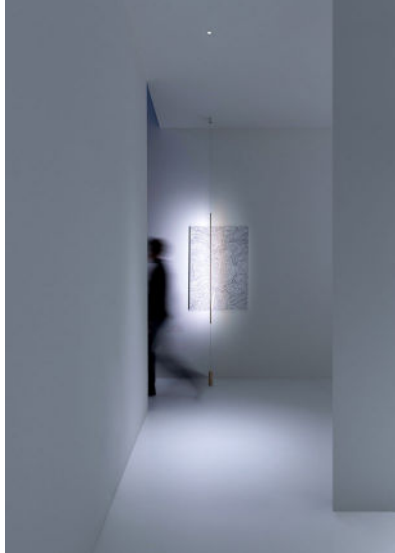


II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

NULLA 25

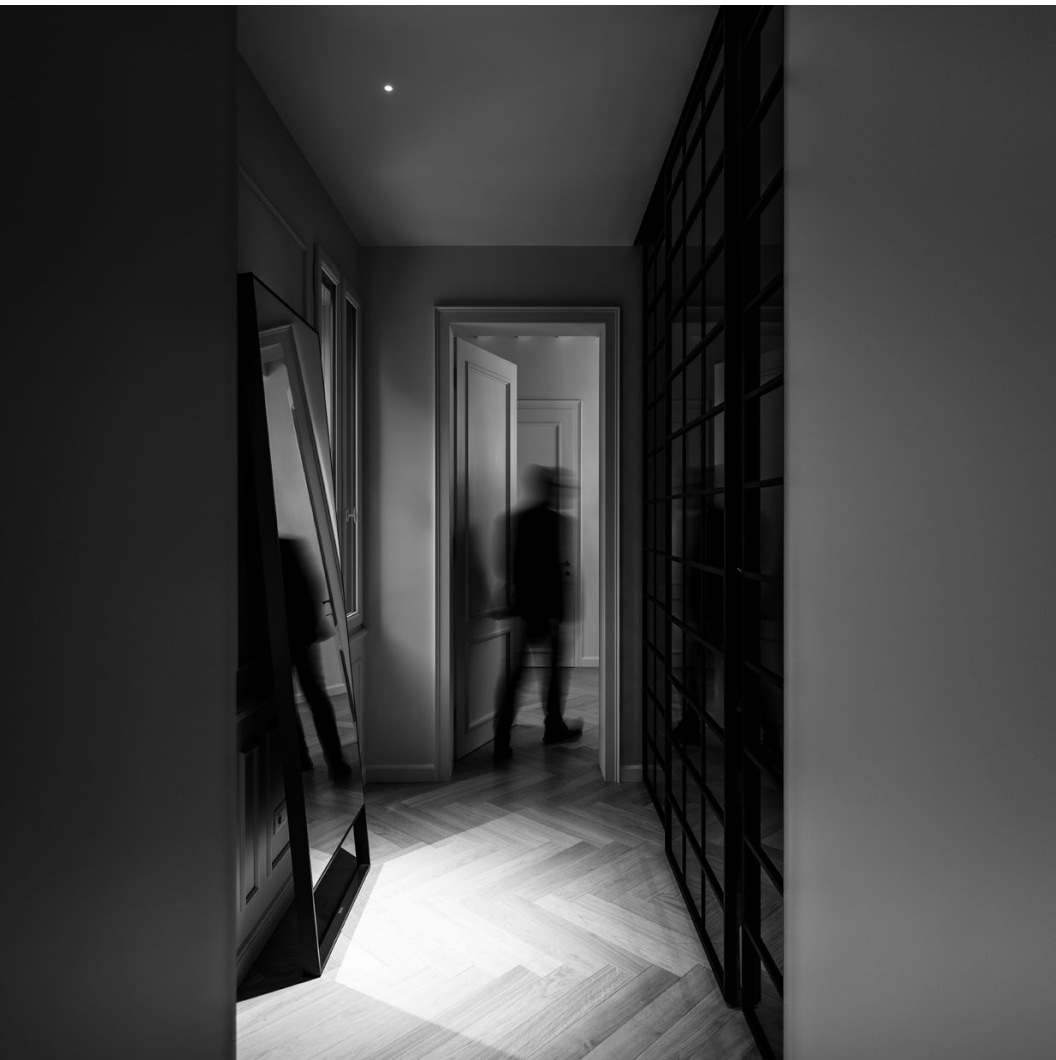

II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM



5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

The sizes are expressed in millimeters / inches.

DESIGN DAVIDE GROPPI - 2015
RECESSED CEILING LAMP - METAL


CERTIFICATED 1972X03 PRODUCT 
IP 20 / IP 65



1A0540003	STANDARD DIM PUSH - 1-10 V - 3000K	24 V DC - 6 W LED - 392 lm - CRI>90
1A0540003-27	STANDARD DIM PUSH - 1-10 V - 2700K	VISIBLE HOLE Ø 25 mm - LUMINAIRE REMOVABLE FOR MAINTENANCE
		COMPULSORY INSTALLATION KIT NOT INCLUDED
		INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - PUSH - 1-10 V DIMMABLE
1A0550003	STANDARD DIM DALI - 3000K	24 V DC - 6 W LED - 392 lm - CRI>90
1A0550003-27	STANDARD DIM DALI - 2700K	VISIBLE HOLE Ø 25 mm - LUMINAIRE REMOVABLE FOR MAINTENANCE
		COMPULSORY INSTALLATION KIT NOT INCLUDED
		INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI DIMMABLE
1A0560003	STANDARD DIM TRIAC - 3000K	24 V DC - 6 W LED - 392 lm - CRI>90
1A0560003-27	STANDARD DIM TRIAC - 2700K	VISIBLE HOLE Ø 25 mm - LUMINAIRE REMOVABLE FOR MAINTENANCE
		COMPULSORY INSTALLATION KIT NOT INCLUDED
		INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - TRIAC / IGBT DIMMABLE

NULLA 25

NULLA 25

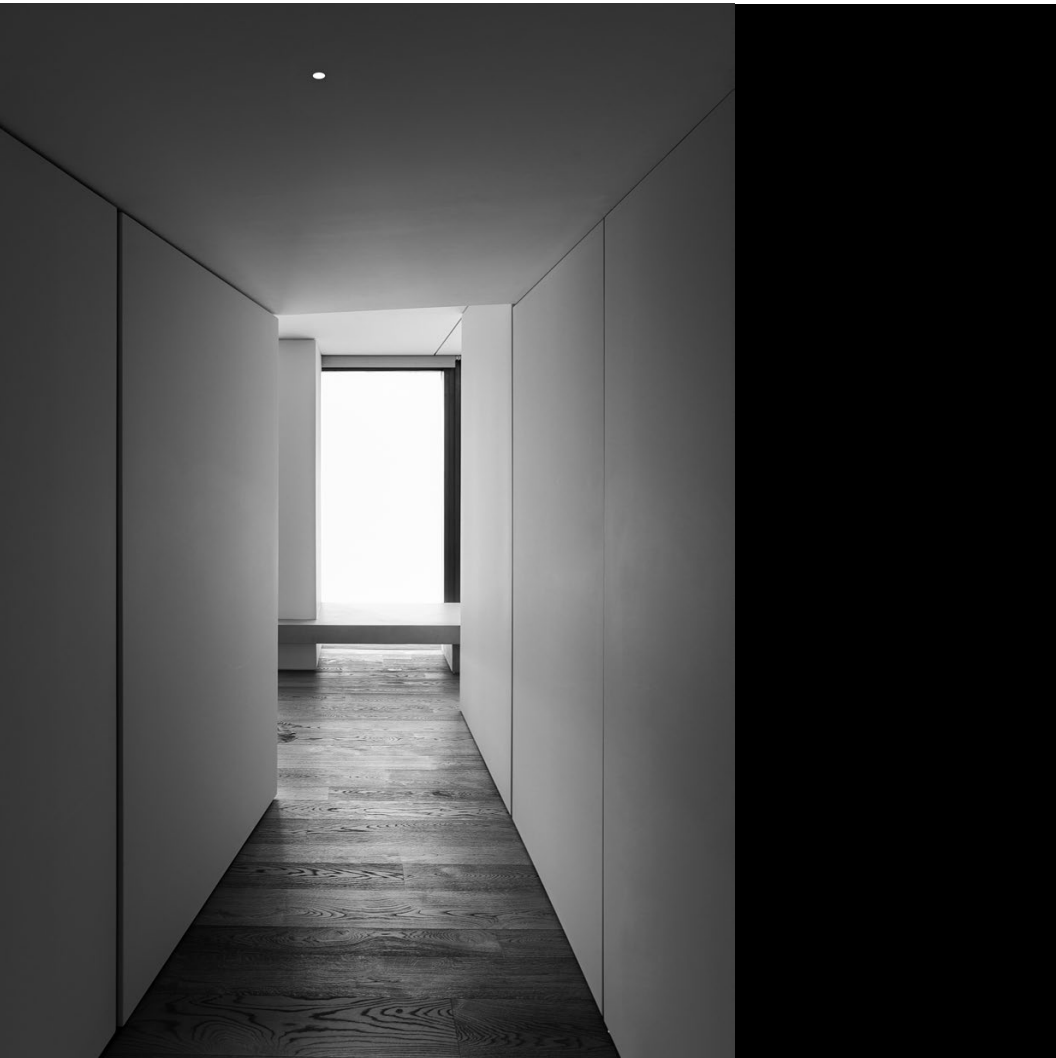

II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM



5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

DESIGN DAVIDE GROPPI - 2019
RECESSED CEILING LAMP - METAL
IP 20/IP 65



NULLA 25 T24



1A1010003	STANDARD TITLE 24	MAX 500 mA DC - 5,6 W LED - 357 lm - 3000K - CRI > 90 VISIBLE HOLE Ø 25 mm - LUMINAIRE REMOVABLE FOR MAINTENANCE COMPULSORY INSTALLATION KIT NOT INCLUDED DRIVER LED NOT INCLUDED (PER MIN 2 UNITS - MAX 4 UNITS)

COMPULSORY INSTALLATION KITS		
S2000010	STANDARD TITLE 24	DRIVER LED (PER MIN 2 UNITS - MAX 4 UNITS) INPUT 120-250 V - 50/60 Hz - OUTPUT 500 mA DC - 50 W - IP20 1-10 V DIMMABLE

II PL



18250003	STANDARD	PLASTERBOARD FLANGE 12.5 mm
		PLASTERBOARD CUT-OUT Ø 35 mm
		MINIMUM SPACE FOR MOUNTING 160 mm

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 3 2 3 4 6 7 5 6 3 5
F. 3 2 3 4 6 7 5 6 3 4