



NULL A

Recessed ceiling lamp with a special optical system and LED technology.
Not accessible from below.

DETAILS.

VISIBLE HOLE: 0.71" Ø X 7" W X 3.5" H

COMPULSORY INSTALL KIT + LED DRIVER REQ. 120V; 0/1-10V DIMMABLE

MAX DISTANCE: 49FT (15000MM)

MINIMUM SPACE FOR MOUNTING: 3.9"H X 11.8" W

24V DC - 9W LED CRI 90

23° - 2700K 304LM -OR- 3000K 327LM

32° - 2700K 384LM -OR- 3000K 413LM




UL LISTED

RATED FOR IC-HOUSING

IP20 RATED FOR DAMP/DRY LOCATIONS

*IP65 RATED WITH IP65 PLASTERBOARD FLANGE.

NULLA

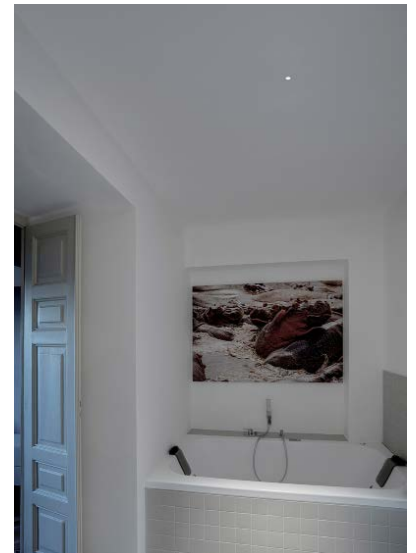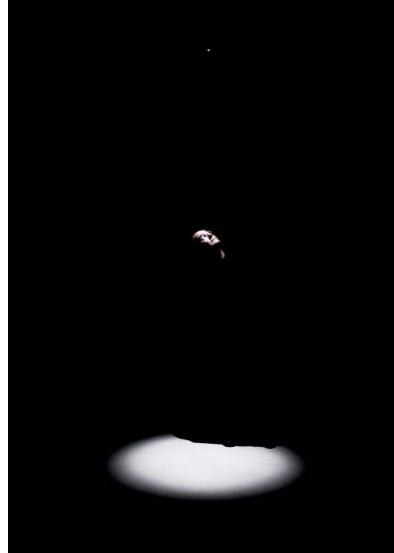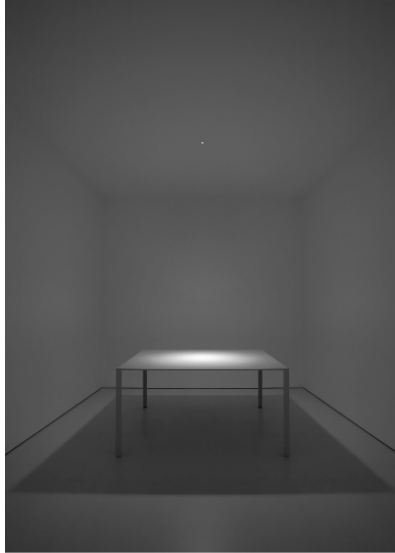

IIPL

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

P. 323 467 5635
F. 323 467 5634

NULLA




II PL

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

P. 323 467 5635
F. 323 467 5634

NULLA

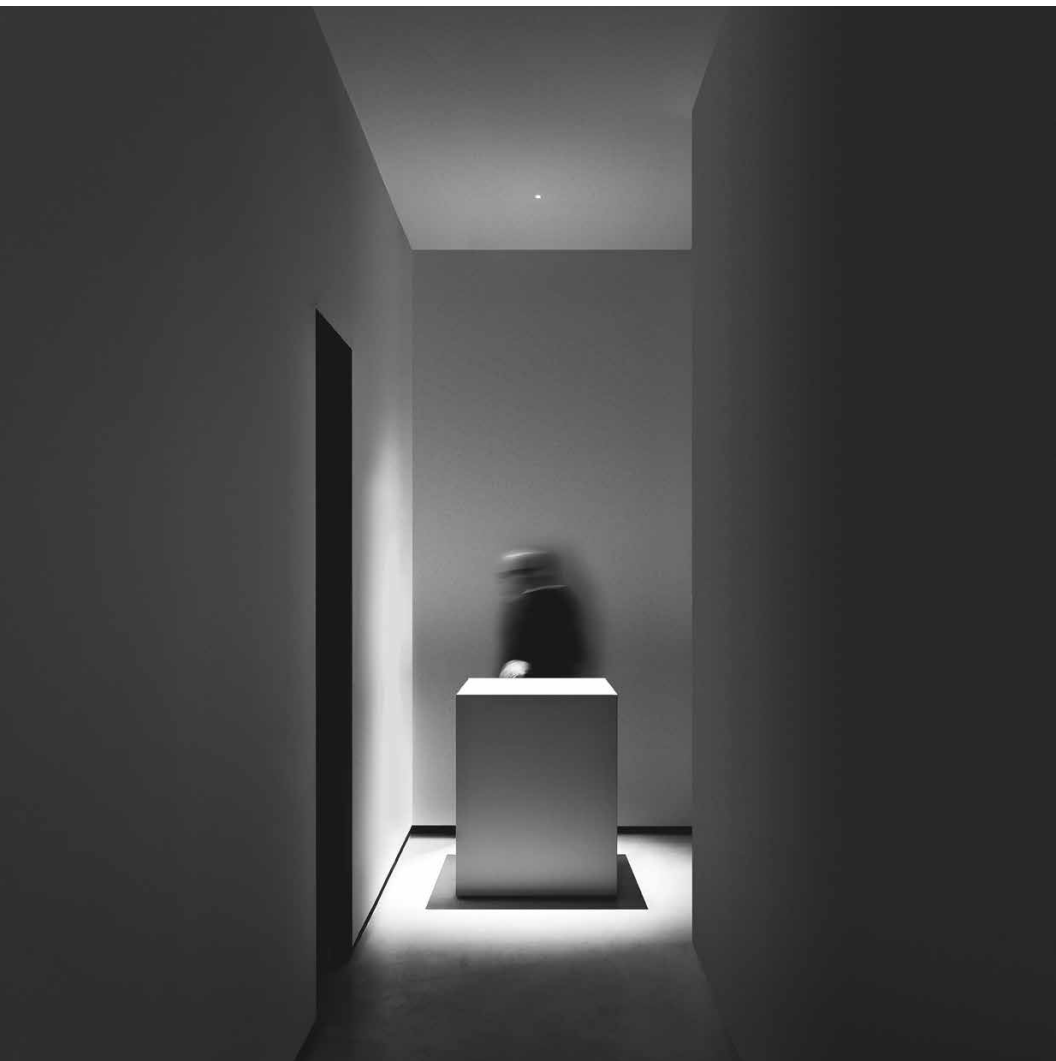

Compasso d'Oro ADI
Award 2014

DESIGN DAVIDE GROPPPI - 2010
RECESSED CEILING LAMP - METAL





NULLA



IP20/IP65

The sizes are expressed in millimeters / inches.



1A410003.27.20	STANDARD - 2700K - BEAM 23°	24 V DC - 9 W LED - UGR < 19 2700K - 304 lm - CRI > 90 / 3000K - 327 lm - CRI > 90 - BEAM 23° VISIBLE HOLE Ø 18 mm / 0.71"
1A410003.30.20	STANDARD - 3000K - BEAM 23°	COMPLSORY INSTALLATION KIT NOT INCLUDED DRIVER NOT INCLUDED
1A2110003.27.20	STANDARD - 2700K - BEAM 32°	24 V DC - 9 W LED - UGR < 19 2700K - 304 lm - CRI > 90 / 3000K - 413 lm - CRI > 90 - BEAM 32° VISIBLE HOLE Ø 18 mm / 0.71"
1A2110003.30.20	STANDARD - 3000K - BEAM 32°	COMPLSORY INSTALLATION KIT NOT INCLUDED DRIVER NOT INCLUDED

COMPULSORY INSTALLATION KITS

1A220400.00.00	MATT BLACK - IP65	PLASTERBOARD FLANGE 12,5 mm / 0.49" PLASTERBOARD CUT-OUT Ø 21 mm / 0.83" - MINIMUM SPACE FOR MOUNTING 100 mm / 3.93"
----------------	-------------------	---

OPTIONAL INSTALLATION KITS






1A378000.00.00	STANDARD 200 x 200 mm / 7.87" x 7.87"	PLASTERBOARD PANEL 12,5 mm / 0.49"
1A379000.00.00	STANDARD 400 x 400 mm / 15.74" x 15.74"	PLASTERBOARD CUT-OUT 200 x 200 mm / 400 x 400 mm

IIPL

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

P. 323 467 5635
F. 323 467 5634

NULLA

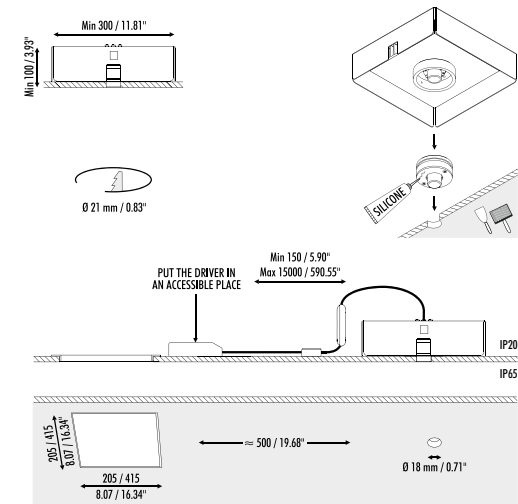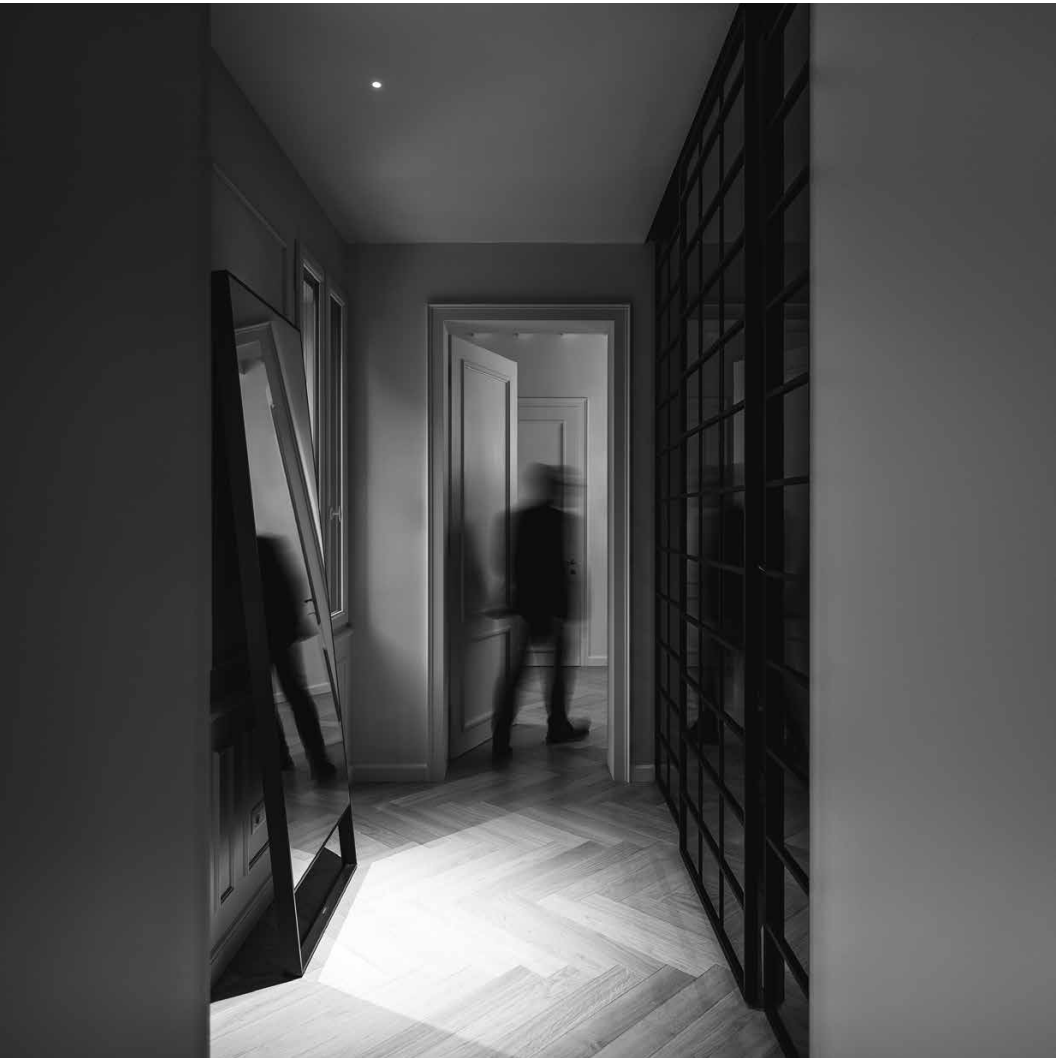

COMPULSORY INSTALLATION KITS

120240870.24	STANDARD	DRIVER INPUT (110-127 V) 120 V - 60 Hz - OUTPUT 24 V DC - (15 W) 20 W - IP20 PUSH - 0/1-10 V DIMMABLE
120241180.24	STANDARD	DRIVER INPUT (110-127 V) 120 V - 60 Hz - OUTPUT 24 V DC - (15 W) 16 W - IP20 DALI DIMMABLE

COMPULSORY INSTALLATION KITS FOR TRIAC DIMMING: DRIVER 120240410 + CONTROLLER 120000034

120240410	STANDARD	DRIVER INPUT (110-127 V) 120 V - 60 Hz - OUTPUT 24 V DC - (12 W) 22 W - IP20 NOT DIMMABLE
120000034	STANDARD	CONTROLLER DIMMABLE DALI - PUSH - TRIAC - 1-10 V - IP20

NULLA

IIPL

PLUGLIGHTING.COM
 INFO@PLUGLIGHTING.COM

P. 323 467 5635
 F. 323 467 5634