



SPLITLINE M20

SplitlineM20, refined thanks to the magnetic mounting of light modules. The magnetic fixation of the modules ensures the electrical connection with two 48V conductors in the profile.

All light modules - spots, linear LED lines and pendants - can easily be placed or replaced into the profile according to the project's requirements, without the need of any tools.

Ceiling Thickness: min. 3/8" - max. 1"

180° corner connectors and 90° corner connectors available.

DETAILS.

PROFILE: 2 1/16" W X 2" H

VISIBLE OPENING: 13/16"

MAX 200W

48V-DC (2 CONDUCTORS)






*DIMMABLE LED POWER SUPPLY AVAILABLE.

IP20 - RATED FOR DRY/DAMP LOCATIONS.

CLASS II

*REFER TO SPEC SHEETS FOR AVAILABLE INDIVIDUAL LED MODULES.

SPLITLINE M20

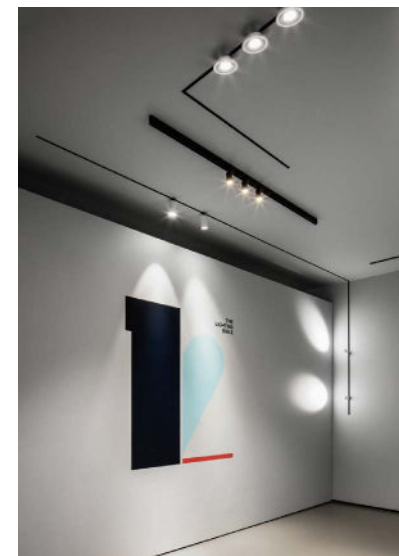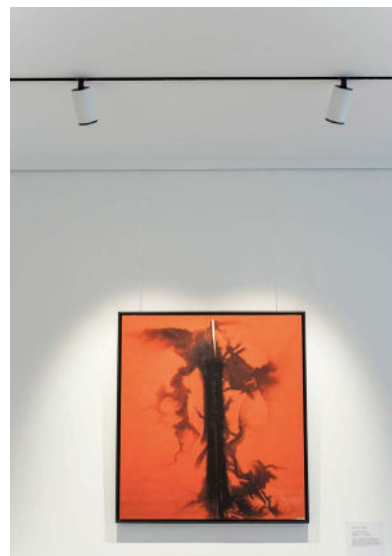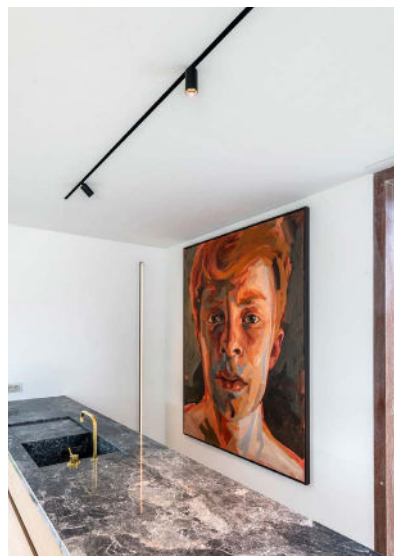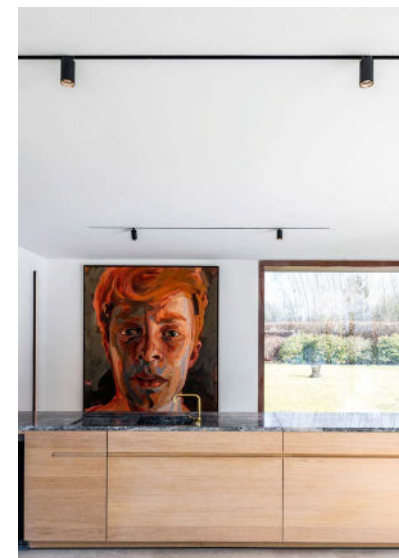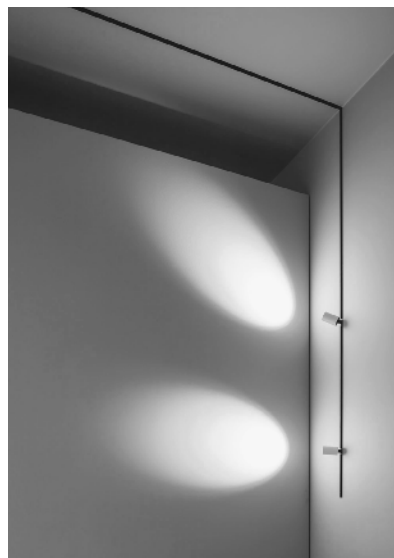


II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

SPLITLINE M20

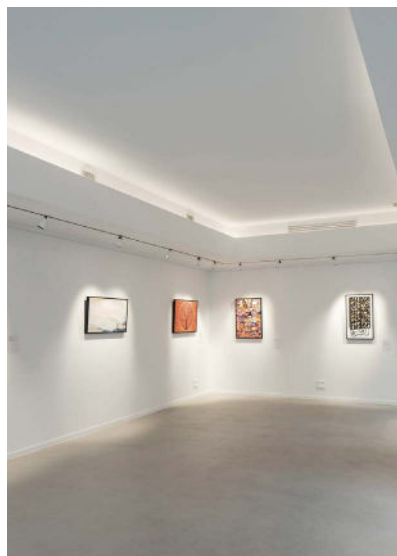

II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

SPLITLINE M20



MAGNETIC
PROFILES

With the magnetic profiles, Delta Light takes it to the next level in the profile section. These profiles offer the highest degree of freedom and flexibility, as all modules have a magnetic fixation. Splitline M20 and M52 allow for a neat, trimless installation, while Shiftline M26L, M35 and M44 can be used for projects where surface or suspended mounting is required. To create the optimal light setting, multiple light modules are available: spot modules with different beams and lumen packages going up to 2000lm for accent lighting, linear LED lines for general or wallwash lighting and pendant modules for an elegant finish of the room. All modules can be placed toolfree into the profile and repositioned afterwards thanks to their magnetic fixation. Simply click the module into the profile and both mechanical and electrical connection are ensured. As this family of profiles is powered by 48V, Smart 48 can be used for an easy 2-wire dimming/power solution, or even wireless. As an extra, today we even offer DALI modules for individual control of luminaires.

PROFILES

								
			SPLITLINE M20	SPLITLINE M52	SHIFTLINE M26L	SHIFTLINE M26H	SHIFTLINE M35R	SHIFTLINE M44
ACCENT LIGHTING		SPY 27 • •	✓		✓	✓	✓	
		SPY 39 SPY 52 SPY 66 • •	✓	✓	✓	✓	✓	
		SPY FOCUS •	✓	✓	✓	✓	✓	
		PUNK •	✓		✓	✓	✓	
		VIZR •	✓		✓	✓	✓	
		HEDRA •	✓		✓	✓	✓	
		TWEETER •	✓		✓	✓		
DECORATIVE LIGHTING		TWEETER BL •	✓		✓	✓		
		GIBBO •	✓	✓	✓	✓	✓	✓
GENERAL LIGHTING		MICROSPYC •	✓	✓	✓	✓	✓	✓
		LED LINE HE	✓		✓*	✓	✓*	✓
		LED LINE UP				✓		✓
		DOT.COM M • • • •	✓		✓*	✓	✓*	✓
		DOT.COM L • • • •						✓
		LED • •		✓				✓
		LED OK • •		✓				
WALLWASH LIGHTING		LED D • •		✓				
		DOT.COM	✓			✓		

*MODULE NOT FLUSH WITH PROFILE

PRO 661

II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM


5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

SPLITLINE M20

SPLITLINE M20







Splitline M20 combines the refinement and the cleanliness of Splitline 16 with a boost of flexibility thanks to the magnetic mounting of the light modules. Together with the mechanical connection, the magnetic fixation of the modules ensures the electrical connection with the two 48V conductors in the profile. In this way all light modules – spots, linear LED lines and pendants – can easily be placed or replaced into the profile according to the project's requirements, without the need of any tools.

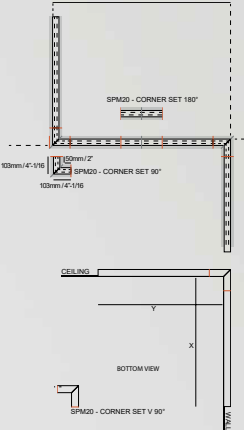


PROFILES

WIRELESS
CONTROL
Suitable
for all
dimming
techniques.
CTRL
DELTA
R
TECHNICAL DATA
PAGE TEC 4




1
PROFILE CONSTRUCTION

 SPM20 - PROFILE 3' 3/8 6 420 20 10 00	 SPM20 - CUSTOMISED 6 23301 0000	 SPM20 - END CAP 420 20 03 01	 SPM - CORNER 180° 420 06 01	 SPM20 - CORNER SET 90° 420 20 06 06	 SPM20 - CORNER SET 90°* 6 23301 0690
MAX. L / PROFILE: 9' 10"-1/8 48V-DC (2 CONDUCTORS) 2 DIM CONDUCTORS 56mm (2.2") 1/2" (12.7mm) (0.7") / 3"		REQUIREMENTS PROFILE CONNECTION			
REQUIREMENTS PROFILE CONNECTION		REQUIREMENTS PROFILE CONNECTION		REQUIREMENTS PROFILE CONNECTION	
REQUIREMENTS PROFILE CONNECTION		REQUIREMENTS PROFILE CONNECTION		REQUIREMENTS PROFILE CONNECTION	
REQUIREMENTS PROFILE CONNECTION		REQUIREMENTS PROFILE CONNECTION		REQUIREMENTS PROFILE CONNECTION	

2
PROFILE FIXATION


SPM20 - FIXATION SET
420 20 14 01
2" - 1/4 x (L + 3/16") x 3"-3/8
min. 3/8" - max. 1"

3
PROFILE CONNECTION

 SPM - SUPPLY 48V 6 420 99 03 48V-DC MAX. 96W / SUPPLY / MAX. 165" 56mm (2.2") IP20 DAMP	 SPM - CONNECTOR 48V-180° 420 99 01 48V-DC MAX. 96W / SUPPLY / MAX. 165" 56mm (2.2") IP20 DAMP	 SPM - CONNECTOR 48V-0-180° 6 420 99 02 48V-DC MAX. 96W / SUPPLY / MAX. 165" 56mm (2.2") IP20 DAMP
--	--	--

4
LIGHT MODULES

* NO MODULES IN CORNER SET B

REQUIREMENTS ► INFO FOLD-OUT RIGHT / OPTIONS ► INFO TECHNICAL CHAPTER / ACCESSORIES ► INFO FOLD-OUT LEFT

PRO 662

PRO 663


II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634


SPLITLINE M20

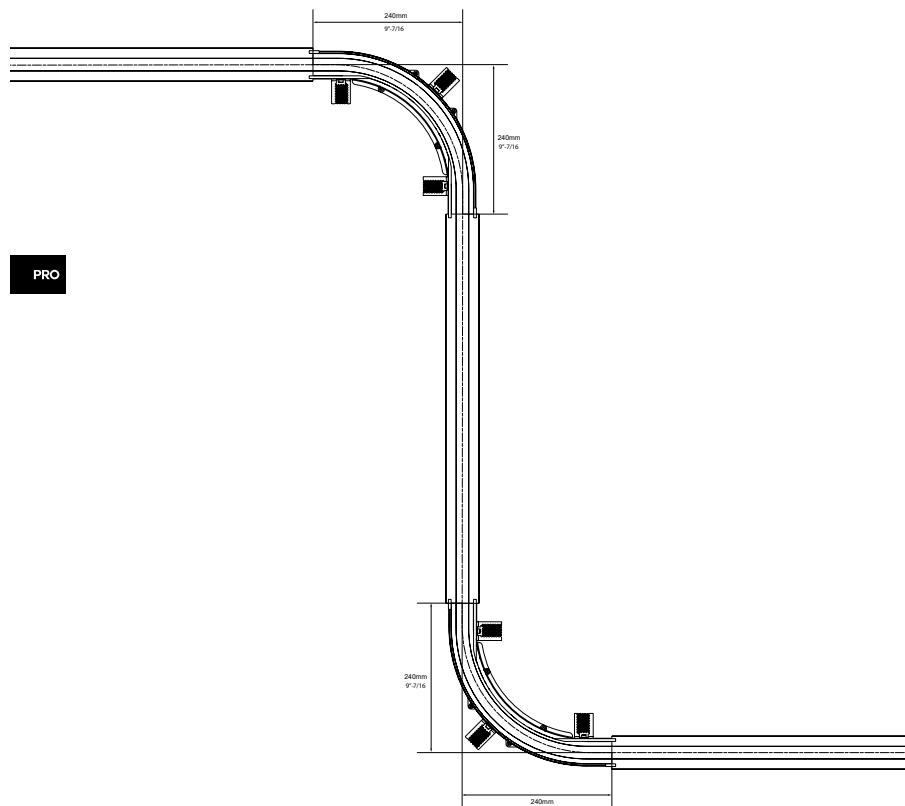

PRO 664

II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

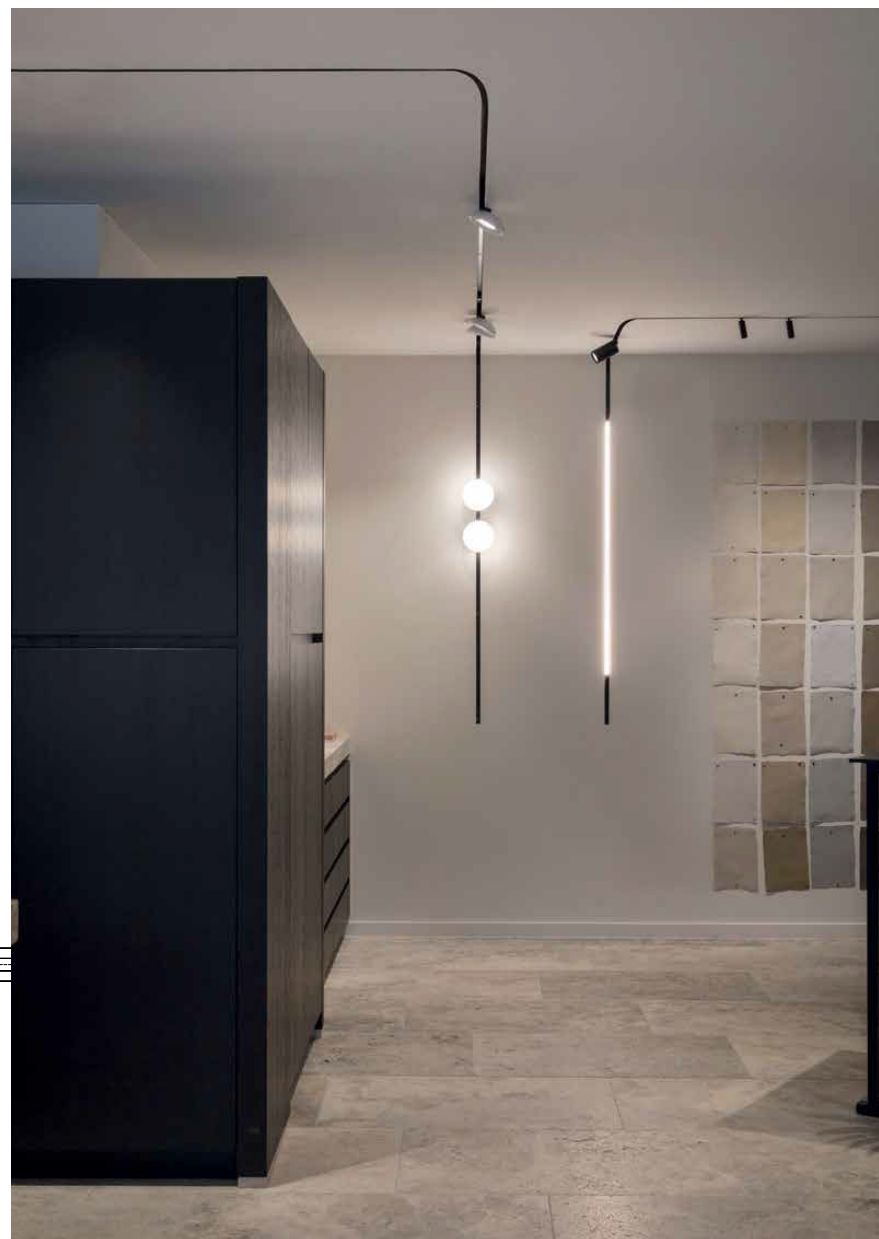

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

SPLITLINE M20

PROFILES




REQUIREMENTS

LED POWER SUPPLY	
48V / 96W	
12"-1/8 x 2"-3/8 x 1"-3/8	
6 300 89 48 95	
120V / 60Hz	
IP20 DAMP	


OPTIONS

PRO

DIMMABLE MODULATOR



SMART 48 MODULATOR DIM9
6 300 90 011
48V-DC
MODULATED 48V-DC + DIM (MAX. 96W)
IP20 DAMP

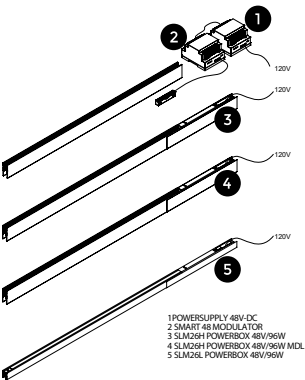

- 1 POWER SUPPLY 48V-DC
- 2 SMART 48 MODULATOR
- 3 SLIM26H POWERBOX 48V/96W
- 4 SLIM26H POWERBOX 48V/96W MDL
- 5 SLIM26L POWERBOX 48V/96W

MODULES

LED LINE HE



REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

- M20 / M26H
- M26L / M35R
- M26H
- M35R
- M44
- M52

MDL			
3000K / CRI>90			
2600lm/3' / 21.6W/3' / 48V-DC			
12.6W / L 610mm - 24"	18.4W / L 810mm - 31"-7/8	21.6W / L 1010mm - 39"-3/4	25.2W / L 1210mm - 47"-5/8
6 421 313 06 93 MDL ◊	6 421 313 08 93 MDL ◊	6 421 313 10 93 MDL ◊	6 421 313 12 93 MDL ◊
-	-	-	-

- M20
- M26L
- M26H
- M35R
- M44
- M52

DALI DIM			
3000K / CRI>90			
2600lm/3' / 21.6W/3' / 48V-DC			
12.6W / L 610mm - 24"	18.4W / L 810mm - 31"-7/8	21.6W / L 1010mm - 39"-3/4	25.2W / L 1210mm - 47"-5/8
6 23347 0005 ◊	6 23348 0005 ◊	6 23349 0005 ◊	6 23350 0005 ◊
-	-	-	-

IP20 DAMP


LED LINE UP



REQUIREMENTS
LED POWER SUPPLY 24V-DC REMOTE

3000K / CRI>90		2700K / CRI>90
1400 lm/3' / 15 W/3' / 24V-DC		-
13W / L 830mm - 32"-11/16		-
-	-	-
6 23376 9300 ◊	-	6 23376 9200 ◊
-	-	-
6 23376 9300 ◊	-	6 23376 9200 ◊
-	-	-

IP20 DAMP



MDL MODULES STANDARD
ON UPPER CONDUCTORS.
ON REQUEST AVAILABLE
ON LOWER CONDUCTORS
FOR SECOND CIRCUIT

REQUIREMENTS ▶ INFO FOLD-OUT RIGHT / OPTIONS ▶ INFO TECHNICAL CHAPTER / ACCESSORIES ▶ INFO FOLD-OUT LEFT

PRO 681

I I P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

SPLITLINE M20

DOT.COM WALLWASH 02 HO




REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

	MDL		
	3500K / CRI>90	3000K / CRI>90	2700K / CRI>90
	LED CLUSTER 10W / 1000lm / 48V-DC		
M20	6 424 642 02 95 MDL	6 424 642 02 92 MDL	6 424 642 02 92 MDL
M26L	-	-	-
M26H	6 424 642 02 95 MDL	6 424 642 02 92 MDL	6 424 642 02 92 MDL
M35R	-	-	-
M44	-	-	-
M52	-	-	-

	DALI DIM		
	3500K / CRI>90	3000K / CRI>90	2700K / CRI>90
	LED CLUSTER 10W / 1000lm / 48V-DC		
M20	6 23367 9505	6 23367 9305	6 23367 9205
M26L	-	-	-
M26H	6 23367 9505	6 23367 9305	6 23367 9205
M35R	-	-	-
M44	-	-	-
M52	-	-	-

Ø 8
IP20 DAMP

DOT.COM WALLWASH 12



REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

	MDL		
	3500K / CRI>90	3000K / CRI>90	2700K / CRI>90
	LED CLUSTER 25,2W / 3000lm / 48V-DC		
M20	6 424 642 12 95 MDL	6 424 642 12 92 MDL	6 424 642 12 92 MDL
M26L	-	-	-
M26H	6 424 642 12 95 MDL	6 424 642 12 92 MDL	6 424 642 12 92 MDL
M35R	-	-	-
M44	-	-	-
M52	-	-	-

	DALI DIM		
	3500K / CRI>90	3000K / CRI>90	2700K / CRI>90
	LED CLUSTER 25,2W / 3000lm / 48V-DC		
M20	6 23370 9505	6 23370 9305	6 23370 9205
M26L	-	-	-
M26H	6 23370 9505	6 23370 9305	6 23370 9205
M35R	-	-	-
M44	-	-	-
M52	-	-	-

Ø 8
IP20 DAMP

DOT.COM WALLWASH 06




REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

	MDL		
	3500K / CRI>90	3000K / CRI>90	2700K / CRI>90
	LED CLUSTER 12,6W / 1500lm / 48V-DC		
M20	6 424 642 06 95 MDL	6 424 642 06 93 MDL	6 424 642 06 92 MDL
M26L	-	-	-
M26H	6 424 642 06 95 MDL	6 424 642 06 93 MDL	6 424 642 06 92 MDL
M35R	-	-	-
M44	-	-	-
M52	-	-	-

	DALI DIM		
	3500K / CRI>90	3000K / CRI>90	2700K / CRI>90
	LED CLUSTER 12,6W / 1500lm / 48V-DC		
M20	6 23368 9505	6 23368 9305	6 23368 9205
M26L	-	-	-
M26H	6 23368 9505	6 23368 9305	6 23368 9205
M35R	-	-	-
M44	-	-	-
M52	-	-	-

Ø 8
IP20 DAMP

DOT.COM WALLWASH 08






REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

	MDL		
	3500K / CRI>90	3000K / CRI>90	2700K / CRI>90
	LED CLUSTER 18,4W / 2200lm / 48V-DC		
M20	6 424 642 08 95 MDL	6 424 642 08 93 MDL	6 424 642 08 92 MDL
M26L	-	-	-
M26H	6 424 642 08 95 MDL	6 424 642 08 93 MDL	6 424 642 08 92 MDL
M35R	-	-	-
M44	-	-	-
M52	-	-	-

	DALI DIM		
	3500K / CRI>90	3000K / CRI>90	2700K / CRI>90
	LED CLUSTER 18,4W / 2200lm / 48V-DC		
M20	6 23369 9505	6 23369 9305	6 23369 9205
M26L	-	-	-
M26H	6 23369 9505	6 23369 9305	6 23369 9205
M35R	-	-	-
M44	-	-	-
M52	-	-	-

Ø 8
IP20 DAMP



REQUIREMENTS ▶ INFO FOLD-OUT RIGHT / OPTIONS ▶ INFO TECHNICAL CHAPTER / ACCESSORIES ▶ INFO FOLD-OUT LEFT

I I P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038


P. 323 467 5635
F. 323 467 5634

SPLITLINE M20

PROFILES



DOT.COM M4



REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

	MDL								
	3500K / CRI>90			3000K / CRI>90			2700K / CRI>90		
	LED CLUSTER 5.6W / 652lm / 48V-DC			LED CLUSTER 5.6W / 628lm / 48V-DC			LED CLUSTER 5.6W / 612lm / 48V-DC		
	14"	33"	49"	14"	33"	49"	14"	33"	49"
M20	-	-	-	-	-	-	-	-	-
M26L	6 424 612 04	6 424 612 04	6 424 612 04	6 424 612 04	6 424 612 04	6 424 612 04	6 424 612 04	6 424 612 04	6 424 612 04
M26H	951 MDL	952 MDL	953 MDL	931 MDL	932 MDL	933 MDL	921 MDL	922 MDL	923 MDL
M35R	-	-	-	-	-	-	-	-	-
M44	-	-	-	-	-	-	-	-	-
M52	-	-	-	-	-	-	-	-	-

Φ B-B / B-C / B-MMAT

1/2 0.4 IP20 DAMP

1 LED



REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

	MDL					
	3500K / CRI>80		3000K / CRI>80		2700K / CRI>80	
	LED 6W / 558lm / 48V-DC		LED 6W / 558lm / 48V-DC		LED 6W / 558lm / 48V-DC	
	20"					
M20	-	-	-	-	-	-
M26L	-	-	-	-	-	-
M26H	-	-	-	-	-	-
M35R	-	-	-	-	-	-
M44	6 23266 8520	6 23266 8520	6 23266 8320	6 23266 8320	6 23266 8220	6 23266 8220
M52	6 421 218 1852 MDL	6 421 218 1852 MDL	6 421 218 1832 MDL	6 421 218 1832 MDL	6 421 218 1822 MDL	6 421 218 1822 MDL
NOTE						
TE						
	DALI DIM					
	3500K / CRI>80		3000K / CRI>80		2700K / CRI>80	
	LED 6W / 558lm / 48V-DC		LED 6W / 558lm / 48V-DC		LED 6W / 558lm / 48V-DC	
	20"					
M20	-	-	-	-	-	-
M26L	-	-	-	-	-	-
M26H	-	-	-	-	-	-
M35R	-	-	-	-	-	-
M44	6 23267 8525	6 23267 8525	6 23267 8325	6 23267 8325	6 23267 8225	6 23267 8225
M52	6 24414 8525	6 24414 8525	6 24414 8325	6 24414 8325	6 24414 8225	6 24414 8225

Φ B-B / B-C / B-MMAT

1/2 0.7 IP20 DAMP

PRO

DOT.COM L2



REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

	MDL								
	3500K / CRI>90			3000K / CRI>90			2700K / CRI>90		
	LED CLUSTER 4W / 438lm / 48V-DC			LED CLUSTER 4W / 420lm / 48V-DC			LED CLUSTER 4W / 408lm / 48V-DC		
	16"	32"	49"	16"	32"	49"	16"	32"	49"
M20	-	-	-	-	-	-	-	-	-
M26L	-	-	-	-	-	-	-	-	-
M26H	-	-	-	-	-	-	-	-	-
M35R	-	-	-	-	-	-	-	-	-
M44	6 23270 9510	6 23270 9520	6 23270 9310	6 23270 9510	6 23270 9520	6 23270 9310	6 23270 9510	6 23270 9520	6 23270 9310
M52	-	-	-	-	-	-	-	-	-

Φ B-B / B-MMAT

1/2 0.4 IP20 DAMP

2 LED



REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

		MDL		
		3500K / CRI>80	3000K / CRI>80	2700K / CRI>80
		2 x LED 6W / 558lm / 48V-DC	2 x LED 6W / 558lm / 48V-DC	2 x LED 6W / 558lm / 48V-DC
		20"		
M20	-	-	-	-
M26L	-	-	-	-
M26H	-	-	-	-
M35R	-	-	-	-
M44	6 23268 8520	6 23268 8320	6 23268 8220	
M52	6 421 218 2852 MDL	6 421 218 2832 MDL	6 421 218 2822 MDL	
NOTE				
		DALI DIM		
		3500K / CRI>80	3000K / CRI>80	2700K / CRI>80
		2 x LED 6W / 558lm / 48V-DC	2 x LED 6W / 558lm / 48V-DC	2 x LED 6W / 558lm / 48V-DC
		20"		
M20	-	-	-	-
M26L	-	-	-	-
M26H	-	-	-	-
M35R	-	-	-	-
M44	6 23269 8525	6 23269 8325	6 23269 8225	
M52	6 24417 8525	6 24417 8325	6 24417 8225	

Φ B-B / B-MMAT

1/2 0.7 IP20 DAMP

DOT.COM L4




REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

	MDL								
	3500K / CRI>90			3000K / CRI>90			2700K / CRI>90		
	LED CLUSTER 6.8W / 764lm / 48V-DC			LED CLUSTER 6.8W / 736lm / 48V-DC			LED CLUSTER 6.8W / 716lm / 48V-DC		
	16"	32"	49"	16"	32"	49"	16"	32"	49"
M20	-	-	-	-	-	-	-	-	-
M26L	-	-	-	-	-	-	-	-	-
M26H	-	-	-	-	-	-	-	-	-
M35R	-	-	-	-	-	-	-	-	-
M44	6 23272 9510	6 23272 9520	6 23272 9310	6 23272 9510	6 23272 9520	6 23272 9310	6 23272 9510	6 23272 9520	6 23272 9310
M52	-	-	-	-	-	-	-	-	-

Φ B-B / B-MMAT

1/2 0.5 IP20 DAMP

2 LED OK



REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

	MDL					
	3500K / CRI>80		3000K / CRI>80		2700K / CRI>80	
	2 x LED 6W / 558lm / 48V-DC		2 x LED 6W / 558lm / 48V-DC		2 x LED 6W / 558lm / 48V-DC	
	20"					
M20	-	-	-	-	-	-
M26L	-	-	-	-	-	-
M26H	-	-	-	-	-	-
M35R	-	-	-	-	-	-
M44	-	-	-	-	-	-
M52	6 421 248 2852 MDL		6 421 248 2832 MDL		6 421 248 2822 MDL	

NOTE

	DALI DIM					
	3500K / CRI>80		3000K / CRI>80		2700K / CRI>80	
	2 x LED 6W / 558lm / 48V-DC		2 x LED 6W / 558lm / 48V-DC		2 x LED 6W / 558lm / 48V-DC	
	20"					
M20	-	-	-	-	-	-
M26L	-	-	-	-	-	-
M26H	-	-	-	-	-	-
M35R	-	-	-	-	-	-
M44	-	-	-	-	-	-
M52	6 24419 8525		6 24419 8325		6 24419 8225	

3000K


IP20

DAMP

Φ B-B / B-MMAT

SPLITLINE M20

1 LED D



REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

	MDL			
	3500K / CRI>90 LED 7.1W / 830lm / 48V-DC	3000K / CRI>90 LED 7.1W / 805lm / 48V-DC	2700K / CRI>90 LED 7.1W / 773lm / 48V-DC	2700-1800K / CRI>90 LED 9.5W / 760lm / 48V-DC
M20	-	-	-	-
M26L	-	-	-	-
M26H	-	-	-	-
M35R	-	-	-	-
M44	-	-	-	-
M52	6 421 228 811 952 D MDL	6 421 228 811 932 D MDL	6 421 228 811 922 D MDL	6 421 228 1902 D MDL

	DALI DIM			
	3500K / CRI>90 LED 7.1W / 830lm / 48V-DC	3000K / CRI>90 LED 7.1W / 805lm / 48V-DC	2700K / CRI>90 LED 7.1W / 773lm / 48V-DC	2700-1800K / CRI>90 LED 9.5W / 760lm / 48V-DC
M20	-	-	-	-
M26L	-	-	-	-
M26H	-	-	-	-
M35R	-	-	-	-
M44	-	-	-	-
M52	6 24415 9525	6 24415 9325	6 24415 9025	6 24416 9025

122mm 4-13/16 0.85 360° IP20 DAMP

PRO

2 LED D



REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

	MDL		
	3500K / CRI>90 2 x LED 7.1W / 830lm / 48V-DC	3000K / CRI>90 2 x LED 7.1W / 805lm / 48V-DC	2700K / CRI>90 2 x LED 7.1W / 773lm / 48V-DC
M20	-	-	-
M26L	-	-	-
M26H	-	-	-
M35R	-	-	-
M44	-	-	-
M52	6 421 228 812 952 D MDL	6 421 228 812 932 D MDL	6 421 228 812 922 D MDL

	DALI DIM		
	3500K / CRI>90 2 x LED 7.1W / 830lm / 48V-DC	3000K / CRI>90 2 x LED 7.1W / 805lm / 48V-DC	2700K / CRI>90 2 x LED 7.1W / 773lm / 48V-DC
M20	-	-	-
M26L	-	-	-
M26H	-	-	-
M35R	-	-	-
M44	-	-	-
M52	6 24418 9525	6 24418 9325	6 24418 9225

122mm 4-13/16 0.85 360° IP20 DAMP

SPY 271



REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

	MDL		
	3500K / CRI>90 LED 5.8W / 816lm / 48V-DC	3000K / CRI>90 LED 5.8W / 787lm / 48V-DC	2700K / CRI>90 LED 5.8W / 753lm / 48V-DC
M20	6 23311 9520	6 23311 9520	6 23311 9220
M26L	6 23210 9520	6 23210 9520	6 23210 9220
M26H	6 23311 9520	6 23311 9520	6 23311 9220
M35R	6 23210 9520	6 23210 9520	6 23210 9220
M44	-	-	-
M52	-	-	-

	DALI DIM		
	3500K / CRI>90 LED 5.8W / 816lm / 48V-DC	3000K / CRI>90 LED 5.8W / 787lm / 48V-DC	2700K / CRI>90 LED 5.8W / 753lm / 48V-DC
M20	6 23312 9525	6 23312 9525	6 23312 9225
M26L	6 23211 9525	6 23211 9525	6 23211 9225
M26H	6 23312 9525	6 23312 9525	6 23312 9225
M35R	6 23211 9525	6 23211 9525	6 23211 9225
M44	-	-	-
M52	-	-	-

0.8 / FBR / FG / GC / W 122mm 4-13/16 0.85 360° IP20 DAMP

SPY 271 L



REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

	MDL		
	3500K / CRI>90 LED 5.8W / 816lm / 48V-DC	3000K / CRI>90 LED 5.8W / 787lm / 48V-DC	2700K / CRI>90 LED 5.8W / 753lm / 48V-DC
M20	6 23385 9520	6 23385 9320	6 23385 9220
M26L	6 23280 9520	6 23280 9520	6 23280 9220
M26H	6 23385 9520	6 23385 9520	6 23385 9220
M35R	6 23280 9520	6 23280 9520	6 23280 9220
M44	-	-	-
M52	-	-	-

	DALI DIM		
	3500K / CRI>90 LED 5.8W / 816lm / 48V-DC	3000K / CRI>90 LED 5.8W / 787lm / 48V-DC	2700K / CRI>90 LED 5.8W / 753lm / 48V-DC
M20	6 23386 9525	6 23386 9325	6 23386 9225
M26L	6 23281 9525	6 23281 9525	6 23281 9225
M26H	6 23386 9525	6 23386 9525	6 23386 9225
M35R	6 23281 9525	6 23281 9525	6 23281 9225
M44	-	-	-
M52	-	-	-

0.8 / FBR / FG / GC / W 122mm 4-13/16 0.85 360° IP20 DAMP

PRO

SPY 272



REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

	MDL		
	3500K / CRI>90 2x LED 5.8W / 816lm / 48V-DC	3000K / CRI>90 2x LED 5.8W / 787lm / 48V-DC	2700K / CRI>90 2x LED 5.8W / 753lm / 48V-DC
M20	6 23313 9520	6 23313 9520	6 23313 9220
M26L	6 23212 9520	6 23212 9520	6 23212 9220
M26H	6 23313 9520	6 23313 9520	6 23313 9220
M35R	6 23212 9520	6 23212 9520	6 23212 9220
M44	-	-	-
M52	-	-	-

	DALI DIM		
	3500K / CRI>90 2x LED 5.8W / 816lm / 48V-DC	3000K / CRI>90 2x LED 5.8W / 787lm / 48V-DC	2700K / CRI>90 2x LED 5.8W / 753lm / 48V-DC
M20	6 23314 9525	6 23314 9525	6 23314 9225
M26L	6 23213 9525	6 23213 9525	6 23213 9225
M26H	6 23314 9525	6 23314 9525	6 23314 9225
M35R	6 23213 9525	6 23213 9525	6 23213 9225
M44	-	-	-
M52	-	-	-

0.8 / W 122mm 4-13/16 0.85 360° IP20 DAMP

SPY 272 L



REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

	MDL		
	3500K / CRI>90 2x LED 5.8W / 816lm / 48V-DC	3000K / CRI>90 2x LED 5.8W / 787lm / 48V-DC	2700K / CRI>90 2x LED 5.8W / 753lm / 48V-DC
M20	6 23387 9520	6 23387 9320	6 23387 9220
M26L	6 23282 9520	6 23282 9520	6 23282 9220
M26H	6 23387 9520	6 23387 9520	6 23387 9220
M35R	6 23282 9520	6 23282 9520	6 23282 9220
M44	-	-	-
M52	-	-	-

	DALI DIM		
	3500K / CRI>90 2x LED 5.8W / 816lm / 48V-DC	3000K / CRI>90 2x LED 5.8W / 787lm / 48V-DC	2700K / CRI>90 2x LED 5.8W / 753lm / 48V-DC
M20	6 23388 9525	6 23388 9325	6 23388 9225
M26L	6 23283 9525	6 23283 9525	6 23283 9225
M26H	6 23388 9525	6 23388 9525	6 23388 9225
M35R	6 23283 9525	6 23283 9525	6 23283 9225
M44	-	-	-
M52	-	-	-

0.8 / W 122mm 4-13/16 0.85 360° IP20 DAMP

REQUIREMENTS ► INFO FOLD-OUT RIGHT / OPTIONS ► INFO TECHNICAL CHAPTER / ACCESSORIES ► INFO FOLD-OUT LEFT

OTHER CRI OR KELVIN ON REQUEST

PRO 686

PRO 686

I I P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

SPLITLINE M20

PROFILES



SPY FOCUS LP



REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE

OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)



	MDL		
	3500K / CRI>90 LED 8,7W // 951lm / 48V-DC	3000K / CRI>90 LED 8,7W // 896lm / 48V-DC	2700K / CRI>90 LED 8,7W // 837lm / 48V-DC
	8° - 43°		
M20	6 23378 9500 ◊	6 23378 9300 ◊	6 23378 9200 ◊
M26L	6 23230 9500 ◊	6 23230 9300 ◊	6 23230 9200 ◊
M26H	6 23378 9500 ◊	6 23378 9300 ◊	6 23378 9200 ◊
M35R	6 23230 9500 ◊	6 23230 9300 ◊	6 23230 9200 ◊
M44	-	-	-
M52	6 24428 9300 ◊	6 24428 9300 ◊	6 24428 9200 ◊

	DALI DIM		
	3500K / CRI>90 LED 8,7W // 951lm / 48V-DC	3000K / CRI>90 LED 8,7W // 896lm / 48V-DC	2700K / CRI>90 LED 8,7W // 837lm / 48V-DC
	8° - 43°		
M20	6 23379 9505 ◊	6 23379 9305 ◊	6 23379 9205 ◊
M26L	6 23231 9505 ◊	6 23231 9305 ◊	6 23231 9205 ◊
M26H	6 23379 9505 ◊	6 23379 9305 ◊	6 23379 9205 ◊
M35R	6 23231 9505 ◊	6 23231 9305 ◊	6 23231 9205 ◊
M44	-	-	-
M52	6 24429 9505 ◊	6 24429 9305 ◊	6 24429 9205 ◊

8 / FBR / FG / W
IP20 DAMP

PRO

SPY FOCUS MP



REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE

OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)



	MDL		
	3500K / CRI>90 LED 17,9W // 2090lm / 48V-DC	3000K / CRI>90 LED 17,9W // 1950lm / 48V-DC	2700K / CRI>90 LED 17,9W // 1874lm / 48V-DC
	12° - 45°		
M20	6 23332 9500 ◊	6 23332 9300 ◊	6 23332 9200 ◊
M26L	6 23232 9500 ◊	6 23232 9300 ◊	6 23232 9200 ◊
M26H	6 23332 9500 ◊	6 23332 9300 ◊	6 23332 9200 ◊
M35R	6 23232 9500 ◊	6 23232 9300 ◊	6 23232 9200 ◊
M44	-	-	-
M52	6 24426 9500 ◊	6 24426 9300 ◊	6 24426 9200 ◊

	DALI DIM		
	3500K / CRI>90 LED 17,9W // 2090lm / 48V-DC	3000K / CRI>90 LED 17,9W // 1950lm / 48V-DC	2700K / CRI>90 LED 17,9W // 1874lm / 48V-DC
	12° - 45°		
M20	6 23373 9505 ◊	6 23373 9305 ◊	6 23373 9205 ◊
M26L	6 23233 9505 ◊	6 23233 9305 ◊	6 23233 9205 ◊
M26H	6 23373 9505 ◊	6 23373 9305 ◊	6 23373 9205 ◊
M35R	6 23233 9505 ◊	6 23233 9305 ◊	6 23233 9205 ◊
M44	-	-	-
M52	6 24427 9505 ◊	6 24427 9305 ◊	6 24427 9205 ◊

8 / FBR / FG / W
IP20 DAMP

PRO

REQUIREMENTS ► INFO FOLD-OUT RIGHT // OPTIONS ► INFO TECHNICAL CHAPTER // ACCESSORIES ► INFO FOLD-OUT LEFT
OTHER CRI OR KELVIN ON REQUEST

PRO 689

I I P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038


P. 323 467 5635
F. 323 467 5634

SPLITLINE M20

PROFILES



PUNK 39



REQUIREMENTS	
LED POWER SUPPLY 48V-DC	REMOTE
OPTIONS	
DIMMABLE MODULATOR	REMOTE
(ONLY FOR MDL)	

	MDL					
	3500K / CR1-90		3000K / CR1-90		2700K / CR1-90	
	LED 7.1W / 830lm / 48V-DC		LED 7.1W / 803lm / 48V-DC		LED 7.1W / 773lm / 48V-DC	
	24"					
M20	6 471 151 811 951 MDL	◇	6 471 151 811 931 MDL	◇	6 471 151 811 921 MDL	◇
M26L	6 23244 9510	◇	6 23244 9310	◇	6 23244 9210	◇
M26H	6 471 151 951 MDL	◇	6 471 151 931 MDL	◇	6 471 151 921 MDL	◇
M35R	6 23244 9510	◇	6 23244 9310	◇	6 23244 9210	◇
M44	-		-		-	
M52	-		-		-	

SITE	DALI DIM		
	3500K / CRI>90	3000K / CRI>90	2700K / CRI>90
	LED 7.1W / 850lm / 48V-DC	LED 7.1W / 803lm / 48V-DC	LED 7.1W / 773lm / 48V-DC
M20	6.23372 9515 ◊	6.23372 9515 ◊	6.23372 9215 ◊
M26L	6.23245 9515 ◊	6.23245 9515 ◊	6.23245 9215 ◊
M26H	6.23372 9515 ◊	6.23372 9515 ◊	6.23372 9215 ◊
M35R	6.23245 9515 ◊	6.23245 9515 ◊	6.23245 9215 ◊
M44	-	-	-
M52	-	-	-

◆ B

Class 2 0.4 IP20 DAMP

HEDRA



REQUIREMENTS
VIZIR TUBE ♦ 473 01 00 B / FBR / FG / W
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE

	MDL		
	3500K / CR>80	3000K / CR>80	2700K / CR>80
	LED 6W / 570lm / 48V-DC	LED 6W / 570lm / 48V-DC	LED 6W / 570lm / 48V-DC
		15°	
M20	6 473 251 851 MDL ◇	6 473 251 831 MDL ◇	6 473 251 821 MDL ◇
M26L	6 23250 8510 ◇	6 23250 8310 ◇	6 23250 8210 ◇
M26H	6 473 251 851 MDL ◇	6 473 251 831 MDL ◇	6 473 251 821 MDL ◇
M35R	6 23250 8510 ◇	6 23250 8310 ◇	6 23250 8210 ◇
M44	-	-	-
M52	-	-	-

NOTE	DALI DIM			
	3000K / CR>80		2700K / CR>80	
	LED 6W / 570lm / 48V-DC	15°	LED 6W / 570lm / 48V-DC	LED 6W / 570lm / 48V-DC
M20	6 23363 8515 Ø	6 23363 8315 Ø	6 23363 8215 Ø	-
M26L	6 23251 8515 Ø	6 23251 8315 Ø	6 23251 8215 Ø	-
M26H	6 23363 8515 Ø	6 23363 8315 Ø	6 23363 8215 Ø	-
M35R	6 23251 8515 Ø	6 23251 8315 Ø	6 23251 8215 Ø	-
M44	-	-	-	-
M52	-	-	-	-

◆ BBR / GC

Class 2 0.7 IP20 DAMP

HEDRA L.



REQUIREMENTS
VIZIR TUBE ♦ ▶ 473 01 00 B / FBR / FG / W
LED POWER SUPPLY 48V-DC REMOTE

	MDL		
	3500K / CR1-90	3000K / CR1-90	2700K / CR1-90
	LED 10,4W / 111lm/48V-DC	LED 10,4W / 111lm/48V-DC	LED 10,4W / 107,3lm/48V-DC
		33°	
M20	6 473 252 811 952 MDL ◊	6 473 252 811 932 MDL ◊	6 473 252 811 922 MDL ◊
M26L	6 23252 9520 ◊	6 23252 9320 ◊	6 23252 9020 ◊
M26H	6 473 252 811 952 MDL ◊	6 473 252 811 932 MDL ◊	6 473 252 811 922 MDL ◊
M35R	6 23252 9520 ◊	6 23252 9320 ◊	6 23252 9020 ◊
M44	-	-	-

NOTE	DALI DIM		
	3500K / CrI=90	3000K / CrI=90	2700K / CrI=90
	LED 10.4W / 111lm / 48V-DC	LED 10.4W / 111lm / 48V-DC	LED 10.4W / 107.3lm / 48V-DC
		33°	
M30	6.23564 9525 ◊	6.23564 9525 ◊	6.23564 9525 ◊
M26L	6.23523 9525 ◊	6.23253 9325 ◊	6.23253 9225 ◊
M26H	6.23564 9525 ◊	6.23564 9525 ◊	6.23564 9525 ◊
M35R	6.23253 9525 ◊	6.23253 9325 ◊	6.23253 9225 ◊
M34	-	-	-
M52	-	-	-

◆ BBR / GC

Class 2 0.9 IP20 DAMP

VIZIR L



REQUIREMENTS
VIZIR TUBE ♦ 473 01 00 B / FBR / FG / W
LED POWER SUPPLY 48V-DC REMOTE

	MDL		
	3500K / CRI-90	3000K / CRI-90	2700K / CRI-90
	LED 10,4W / 115lm / 48V-DC	LED 10,4W / 111lm / 48V-DC	LED 10,4W / 107lm / 48V-DC
	33"		
M20	6 473 152 811 952 MDL ◊	6 473 152 811 932 MDL ◊	6 473 152 811 922 MDL ◊
M26L	6 23248 9520 ◊	6 23248 9320 ◊	6 23248 9220 ◊
M26H	6 473 152 811 952 MDL ◊	6 473 152 811 932 MDL ◊	6 473 152 811 922 MDL ◊
M35R	6 23248 9520 ◊	6 23248 9320 ◊	6 23248 9220 ◊
M44	-	-	-
M52	-	-	-

NOTE	DALI DM		
	3500K / CRI>90 LED 10,4W / 115lm / 48V-DC	3000K / CRI>90 LED 10,4W / 111lm / 48V-DC	2700K / CRI>90 LED 10,4W / 107lm / 48V-DC
M20	6 23362 9525 ◊	6 23362 9325 ◊	6 23362 9225 ◊
M26L	6 23249 9525 ◊	6 23249 9325 ◊	6 23249 9225 ◊
M26H	6 23362 9525 ◊	6 23362 9325 ◊	6 23362 9225 ◊
M35R	6 23249 9525 ◊	6 23249 9325 ◊	6 23249 9225 ◊
M44	-	-	-
M52	-	-	-

◆BBR / GC

Class 2 0.7 IP20 DAMP

REQUIREMENTS ▶ INFO FOLD-OUT RIGHT / OPTIONS ▶ INFO TECHNICAL CHAPTER / ACCESSORIES ▶ INFO FOLD-OUT LEFT

OTHER CRI OR KELVIN ON REQUEST

SPLITLINE M20

TWEETER

PATENTED EX-CENTRIC ROTATION SYSTEM



REQUIREMENTS
LED POWER SUPPLY 48V-DC
OPTIONS
DIMMABLE MODULATOR
ONLY FOR MDL


ACCESSORIES
TWEETER CLIP + HONEYCOMB / LENS / GLASS 40

	MDL					
	3500K / CRI>90		3000K / CRI>90		2700K / CRI>90	
	LED 10.4W / 1153lm / 48V-DC		LED 10.4W / 1118lm / 48V-DC		LED 10.4W / 1073lm / 48V-DC	
	33°		50°		33°	
M20	6 421 512 811 952 MDL	6 421 512 811 953 MDL	6 421 512 811 952 MDL	6 421 512 811 953 MDL	6 421 512 811 952 MDL	6 421 512 811 953 MDL
M26L	6 23240 9202	6 23240 9202	6 23240 9202	6 23240 9202	6 23240 9202	6 23240 9202
M26H	6 421 512 811 952 MDL	6 421 512 811 953 MDL	6 421 512 811 952 MDL	6 421 512 811 953 MDL	6 421 512 811 952 MDL	6 421 512 811 953 MDL
M35R	-	-	-	-	-	-
M44	-	-	-	-	-	-
M52	-	-	-	-	-	-

	DALI DIM					
	3500K / CRI>90		3000K / CRI>90		2700K / CRI>90	
	LED 10.4W / 1153lm / 48V-DC		LED 10.4W / 1118lm / 48V-DC		LED 10.4W / 1073lm / 48V-DC	
	33°		50°		33°	
M20	6 23351 9325	6 23351 9335	6 23351 9325	6 23351 9335	6 23351 9325	6 23351 9335
M26L	6 23241 9325	6 23241 9335	6 23241 9325	6 23241 9335	6 23241 9325	6 23241 9335
M26H	6 23351 9325	6 23351 9335	6 23351 9325	6 23351 9335	6 23351 9325	6 23351 9335
M35R	-	-	-	-	-	-
M44	-	-	-	-	-	-
M52	-	-	-	-	-	-

Ø W
13 13 IP20 DAMP

M - GIBBO



REQUIREMENTS
BOWL GLASS CLEAR
BOWL GLASS AMBER
BOWL GLASS OPAL WHITE
LED POWER SUPPLY 48V-DC
OPTIONS
DIMMABLE MODULATOR
REMOTE
ONLY FOR MDL

286 67 01
286 67 02
286 67 03
M20
M26L
M26H
M35R
M44
M52


	MDL		
	3500K / CRI>90	3000K / CRI>90	2700K / CRI>90
	LED 7.1W / 830lm / 48V-DC		
	24°		
M20	6 421 622 811 950 MDL	6 421 622 811 930 MDL	6 421 622 811 920 MDL
M26L	-	-	-
M26H	-	-	-
M35R	-	-	-
M44	-	-	-
M52	-	-	-

	DALI DIM		
	3500K / CRI>90	3000K / CRI>90	2700K / CRI>90
	LED 7.1W / 830lm / 48V-DC		
	24°		
M20	6 23354 9305	6 23354 9305	6 23354 9205
M26L	-	-	-
M26H	-	-	-
M35R	-	-	-
M44	-	-	-
M52	-	-	-

EXCL GLASS
INCL 1 x CABLE 2 x 18 AWG / 5'
INCL 1 x CABLE SUSP-SINGLE AUTO 5'
13 13 IP20 DAMP

TWEETER BL

PATENTED EX-CENTRIC ROTATION SYSTEM




REQUIREMENTS
LED POWER SUPPLY 48V-DC
OPTIONS
DIMMABLE MODULATOR
REMOTE
ONLY FOR MDL

	MDL					
	3500K / CRI>90		3000K / CRI>90		2700K / CRI>90	
	LED 10.4W / 1153lm / 48V-DC		LED 10.4W / 1118lm / 48V-DC		LED 10.4W / 1073lm / 48V-DC	
	33°		50°		33°	
M20	6 421 522 811 950 MDL	6 421 522 811 951 MDL	6 421 522 811 930 MDL	6 421 522 811 931 MDL	6 421 522 811 920 MDL	6 421 522 811 921 MDL
M26L	6 23242 9500	6 23242 9500	6 23242 9300	6 23242 9300	6 23242 9200	6 23242 9200
M26H	6 421 522 811 950 MDL	6 421 522 811 951 MDL	6 421 522 811 930 MDL	6 421 522 811 931 MDL	6 421 522 811 920 MDL	6 421 522 811 921 MDL
M35R	-	-	-	-	-	-
M44	-	-	-	-	-	-
M52	-	-	-	-	-	-

	DALI DIM					
	3500K / CRI>90		3000K / CRI>90		2700K / CRI>90	
	LED 10.4W / 1153lm / 48V-DC		LED 10.4W / 1118lm / 48V-DC		LED 10.4W / 1073lm / 48V-DC	
	33°		50°		33°	
M20	6 23352 9505	6 23352 9505	6 23352 9305	6 23352 9305	6 23352 9205	6 23352 9205
M26L	6 23243 9505	6 23243 9505	6 23243 9305	6 23243 9305	6 23243 9205	6 23243 9205
M26H	6 23352 9505	6 23352 9505	6 23352 9305	6 23352 9305	6 23352 9205	6 23352 9205
M35R	-	-	-	-	-	-
M44	-	-	-	-	-	-
M52	-	-	-	-	-	-

Ø B / W
EXCL GLASS
13 13 IP20 DAMP

MICROSPY 39 C



REQUIREMENTS
LED POWER SUPPLY 48V-DC
OPTIONS
DIMMABLE MODULATOR
REMOTE
ONLY FOR MDL

286 67 01
286 67 02
286 67 03
M20
M26L
M26H
M35R
M44
M52

	MDL		
	3500K / CRI>90	3000K / CRI>90	2700K / CRI>90
	LED 7.1W / 830lm / 48V-DC		
	24°		
M20	6 421 612 811 951 MDL	6 421 612 811 931 MDL	6 421 612 811 921 MDL
M26L	-	-	-
M26H	-	-	-
M35R	-	-	-
M44	-	-	-
M52	-	-	-

	DALI DIM		
	3500K / CRI>90	3000K / CRI>90	2700K / CRI>90
	LED 7.1W / 830lm / 48V-DC		
	24°		
M20	6 23353 9515	6 23353 9315	6 23353 9215
M26L	-	-	-
M26H	-	-	-
M35R	-	-	-
M44	-	-	-
M52	-	-	-

EXCL GLASS
INCL 1 x CABLE 2 x 18 AWG / 5'
13 13 IP20 DAMP

REQUIREMENTS ▶ INFO FOLD-OUT RIGHT / OPTIONS ▶ INFO TECHNICAL CHAPTER / ACCESSORIES ▶ INFO FOLD-OUT LEFT
OTHER CRI OR KELVIN ON REQUEST

I I P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634