

## LEDS GO

Fixture in anodized aluminum for indoor and outdoor use - wall or floor light. LED available in white, red, green and blue. Requires power supply and concrete box.


### DETAILS.

1 9/16" W X 1 9/16" H X 1 1/4" D

1.1W 36LM LED 3000K, CRI 80  
350MA LED POWER SUPPLY REQ.

IP67 – RATED FOR DRY/DAMP AND WET LOCATION.  
ETL LISTED

LEDS GO

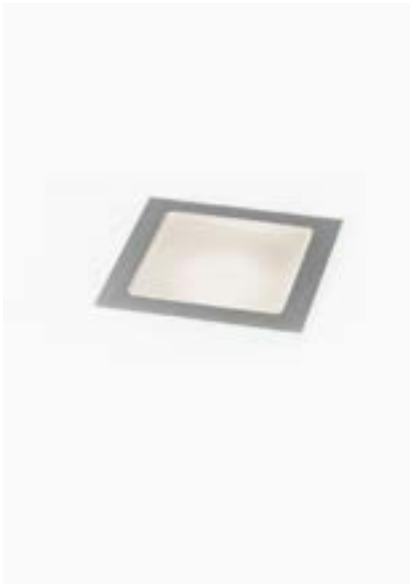

LEDS GO




**II P L**

PLUGLIGHTING.COM  
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE  
STE 108 LOS ANGELES 90038

P. 323 467 5635  
F. 323 467 5634


Class 2	1"-1/2 x 1"-1/2 x 1"-3/4
CRI > 80	<b>LEDS GO IN FORTE</b>
4000 K	LED [A] 1.1W / 130lm / 350mA 6 302 10 34 ◊ ◊ = ANO
3000 K	LED [A] 1.1W / 120lm / 350mA 6 302 10 32 ◊ ◊ = ANO




<sup>(1)</sup>Values based on 3000K standard finish

0.2 IP67 WET  
FULL INFO TECHNICAL CHAPTER

**OPTIONS**

<b>INSTALLATION</b>	
<b>CONCRETE BOX 151</b>	1"-5/8 x 1"-5/8 x 2"-5/16 302 19 21
<b>CONCRETE BOX TR 152</b>	1"-5/8 x 1"-5/8 x 2"-5/16 302 19 22

**CONTROL GEAR**  
LED POWER SUPPLY  
ALL INFO ON FOLD-OUT COVER

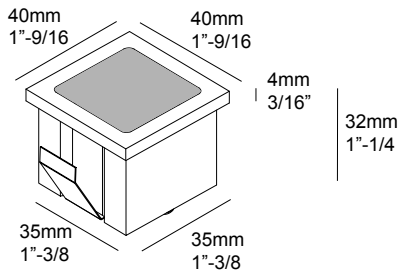**Application**  
For indoor and outdoor use  
Floor or wall recessed installation.

**Light Source**  
One Max. 1,1W LED included

**Color Finish**  
ANO - ALU Anodized

**Delivered Lumens**  
36lm at 3000K<sup>(1)</sup> at 350mA  
39lm at 4000K<sup>(1)</sup> at 350mA

**Power Supply**  
LED power supply 350mA, not included

**Specification features**  
Housing fabricated of powder coated steel, powder coated steel trim  
Pre-installed springs for easy installation  
Suitable for dry, damp and wet location  
Dust-tight - Protected against the effects of temporary immersion → IP67  
Weight: 0,2lbs 0,09kg

**Dimensions**  
Height: 45mm = 1"-3/4  
Length: 40mm = 1"-9/16  
Width: 40mm = 1"-9/16

**PROJECT INFO**

Date \_\_\_\_\_

Client \_\_\_\_\_

Project Name \_\_\_\_\_

Type/Quantity \_\_\_\_\_

