



MINIGRID IN TRIMLESS SI

Trimless recessed fixture for plaster or concrete ceilings for power LED lamps. Finishes available in painted white or black (frame/snap-in finished can be combined). Available in 1 or 2 lamp configurations. Adjustable 0-20° with 350° rotation. Housing in IC or NIC with dimmable LED power supply available. Remodel housing for Class II wiring only.

DETAILS.

MINIGRID IN TRIMLESS SI 1:

4"W X 4"D X 2-1/4"H

1 X 10.4W POWERLED, CRI>90

MINIGRID IN TRIMLESS SI 2:

8"W X 4"D X 2-1/4"H

2 X 10.4W POWERLED, CRI>90

REFLECTORS AVAILABLE IN 18°, 33°, 40° OR 50°


AVAILABLE IN 2700 & 3000K

SNAP-IN + ROUGH-IN REQUIRED

IP20 - RATED FOR DRY/DAMP LOCATIONS.

ETL LISTED

MINIGRID IN TRIMLESS SI

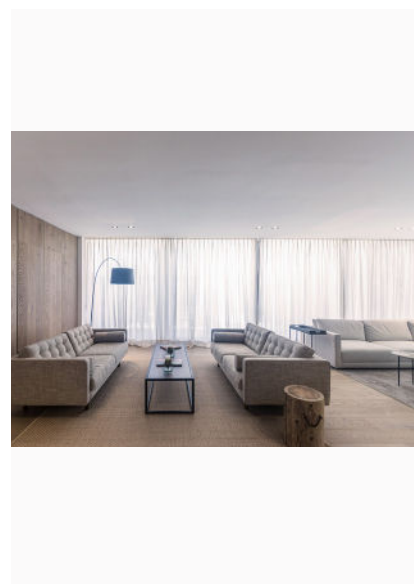





II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

MINIGRID IN TRIMLESS SI

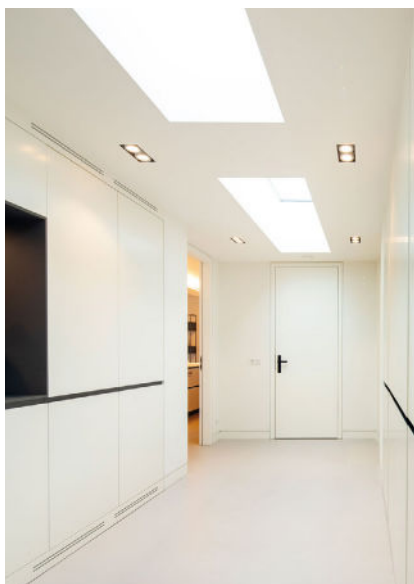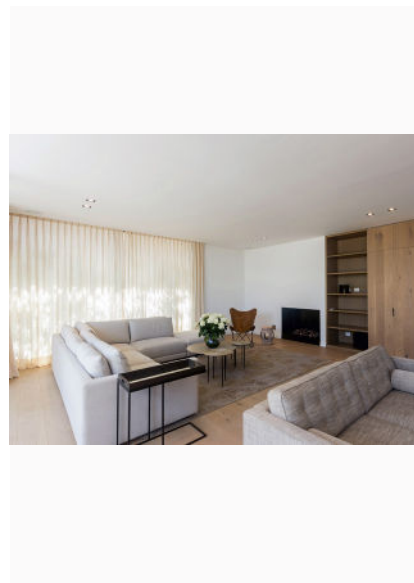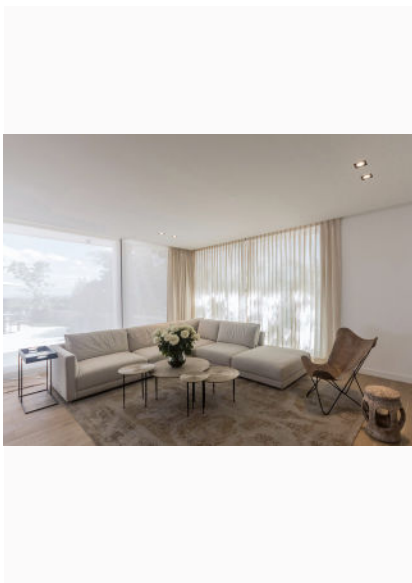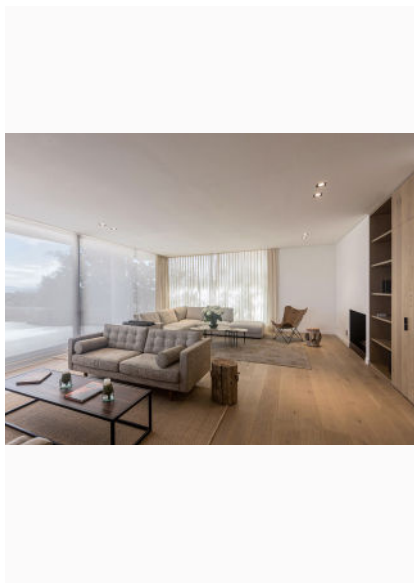




II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

**MINIGRID IN TRIMLESS 1 FRAME**

6 202 73 01 ◇
◇ = B / W

0.4

REQUIREMENTS
MINIGRID SNAP-IN
+
ROUGH-IN

CRI > 90

MINIGRID SNAP-IN

3500 K LED [H] 10.4W / 1109lm / 500mA

REFL SP 18° **6 202 790 811 951** ◇
◇ = B / W

REFL FL 33° **6 202 790 811 952** ◇
◇ = B / W

REFL WFL 50° **6 202 790 811 953** ◇
◇ = B / W

3000 K LED [H] 10.4W / 1075lm / 500mA

REFL SP 18° **6 202 790 811 931** ◇
◇ = B / W

REFL FL 33° **6 202 790 811 932** ◇
◇ = B / W

REFL WFL 50° **6 202 790 811 933** ◇
◇ = B / W

2700 K LED [H] 10.4W / 1032lm / 500mA



REFL SP 18° **6 202 790 811 921** ◇
◇ = B / W

REFL FL 33° **6 202 790 811 922** ◇
◇ = B / W

REFL WFL 50° **6 202 790 811 923** ◇
◇ = B / W

ADJUSTABLE 0° - 20° / 350°

0.7 IP20
IP23 DAMP



⁽¹⁾Values based on 3000K standard finish at 33°

Application

Finishing section to be used with DELTA LIGHT rough-in housing or plasterframe.
For indoor use only

COLOR FINISH (FRAME)

B - Black / W - White

COLOR FINISH (SNAP-IN)

B - Black / W - White

Light Source

One Max. 10,4W LED included

Delivered Lumens

856lm at 2700K⁽¹⁾ at 500mA with a SP-18° Reflector
840lm at 2700K⁽¹⁾ at 500mA with a FL-33° Reflector
830lm at 2700K⁽¹⁾ at 500mA with a WFL-50° Reflector
892lm at 3000K⁽¹⁾ at 500mA with a SP-18° Reflector
875lm at 3000K⁽¹⁾ at 500mA with a FL-33° Reflector
865lm at 3000K⁽¹⁾ at 500mA with a WFL-50° Reflector
920lm at 3500K⁽¹⁾ at 500mA with a SP-18° Reflector
903lm at 3500K⁽¹⁾ at 500mA with a FL-33° Reflector
892lm at 3500K⁽¹⁾ at 500mA with a WFL-50° Reflector

Power Supply

Included in rough-in option.

Specification features

Housing fabricated of powder coated steel, powder coated steel trim
Pre-installed springs for easy installation
Suitable for dry and damp location
Weight: 1,8lbs 0,82kg

Dimensions

Height: 57mm = 2"-1/4
Width: 104mm = 4"-1/16
Length: 104mm = 4"-1/16

PROJECT INFO

Date

Client

Project Name


Type/Quantity



Intertek
Conforms to ANSI/UL Std. 1598
Cert. to CAN/CSA Std. 22.2 No. 250.0



Last Update ALLU 22/05/2019

**MINIGRID IN TRIMLESS 2 FRAME**

6 202 73 02 ◇
◇ = B / W

0.7

REQUIREMENTS
2 x MINIGRID SNAP-IN
+
ROUGH-IN

CRI > 90

MINIGRID SNAP-IN

3500 K LED [H] 10.4W / 1109lm / 500mA



6 202 790 811 951 ◇
◇ = B / W



6 202 790 811 952 ◇
◇ = B / W



6 202 790 811 953 ◇
◇ = B / W

3000 K LED [H] 10.4W / 1075lm / 500mA



6 202 790 811 931 ◇
◇ = B / W



6 202 790 811 932 ◇
◇ = B / W



6 202 790 811 933 ◇
◇ = B / W

2700 K LED [H] 10.4W / 1032lm / 500mA



6 202 790 811 921 ◇
◇ = B / W





6 202 790 811 922 ◇
◇ = B / W



6 202 790 811 923 ◇
◇ = B / W

ADJUSTABLE 0° - 20° / 350°

0.7 IP20
IP23 DAMP



⁽¹⁾Values based on 3000K standard finish at 33°

Application

Finishing section to be used with DELTA LIGHT rough-in housing or plasterframe.
For indoor use only

COLOR FINISH (FRAME)

B - Black / W - White

COLOR FINISH (SNAP-IN)

B - Black / W - White

Light Source

Two Max. 10,4W LED included

Delivered Lumens

1712lm at 2700K⁽¹⁾ at 500mA with a SP-18° Reflector
1681lm at 2700K⁽¹⁾ at 500mA with a FL-33° Reflector
1661lm at 2700K⁽¹⁾ at 500mA with a WFL-50° Reflector
1783lm at 2700K⁽¹⁾ at 500mA with a SP-18° Reflector
1751lm at 2700K⁽¹⁾ at 500mA with a FL-33° Reflector
1730lm at 2700K⁽¹⁾ at 500mA with a WFL-50° Reflector
1840lm at 2700K⁽¹⁾ at 500mA with a SP-18° Reflector
1806lm at 2700K⁽¹⁾ at 500mA with a FL-33° Reflector
1785lm at 2700K⁽¹⁾ at 500mA with a WFL-50° Reflector

Power Supply

Included in rough-in option.

Specification features

Housing fabricated of powder coated steel, powder coated steel trim
Pre-installed springs for easy installation
Suitable for dry and damp location
Weight: 2,4lbs 1,1kg

Dimensions

Height: 57mm = 2"-1/4
Width: 207mm = 8"-1/8
Length: 104mm = 4"-1/16

PROJECT INFO

Date _____

Client _____

Project Name _____


Type/Quantity _____



Intertek
Conforms to ANSI/UL Std. 1598
Cert. to CAN/CSA Std. 22.2 No. 250.0



2

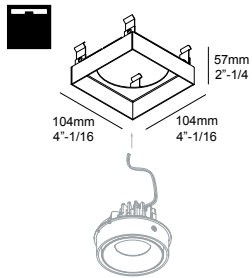**MINIGRID IN TRIMLESS 1 FRAME**

6 202 73 01 ◇
◇ = B / W

0.4

REQUIREMENTS
MINIGRID SNAP-IN
+
ROUGH-IN

CRI > 90

MINIGRID SNAP-IN SOFT





LED 10W / 565lm / 650mA



6 202 790 1902 ◇
◇ = B / W

ADJUSTABLE 0° - 20° / 350°

CE 1.1 IP20 DAMP



⁽¹⁾Values based on 3000K standard finish at 40°

Application

Finishing section to be used with DELTA LIGHT rough-in housing or plasterframe.
For indoor use only

COLOR FINISH (FRAME)

B - Black / W - White

COLOR FINISH (SNAP-IN)

B - Black / W - White

Light Source

One Max. 10W LED included

Delivered Lumens

387lm at 1800-2700K⁽¹⁾ at 650mA with a WFL40° Reflector

Power Supply

Included in rough-in option.

Specification features

Housing fabricated of powder coated steel, powder coated steel trim
Pre-installed springs for easy installation
Suitable for dry and damp location
Weight: 1,8lbs 0,82kg

Dimensions

Height: 57mm = 2"-1/4
Width: 104mm = 4"-1/16
Length: 104mm = 4"-1/16

PROJECT INFO


Date

Client

Project Name

Type/Quantity

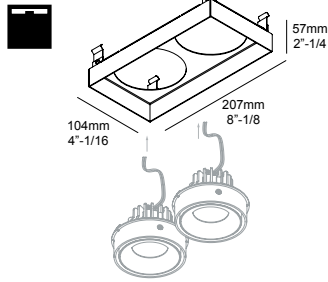

**MINIGRID IN TRIMLESS 2 FRAME**

6 202 73 02 ◇
◇ = B / W

0.7

REQUIREMENTS
2 x MINIGRID SNAP-IN
+
ROUGH-IN

CRI > 90

MINIGRID SNAP-IN SOFT



LED 10W / 565lm / 650mA



6 202 790 1902 ◇
◇ = B / W

ADJUSTABLE 0° - 20° / 350°

IP20 IP23 DAMP



⁽¹⁾Values based on 3000K standard finish at 40°

Application

Finishing section to be used with DELTA LIGHT rough-in housing or plasterframe.
For indoor use only

COLOR FINISH (FRAME)

B - Black / W - White

COLOR FINISH (SNAP-IN)

B - Black / W - White

Light Source

Two Max. 10W LED included

Delivered Lumens

774lm at 1800-2700K⁽¹⁾ at 650mA with a FL40° Reflector

Power Supply

Included in rough-in or remodel option.

Specification features

Housing fabricated of powder coated steel, powder coated steel trim
Pre-installed springs for easy installation
Suitable for dry and damp location
Weight: 2,4lbs 1,1kg

Dimensions

Height: 57mm = 2"-1/4
Width: 207mm = 8"-1/8
Length: 104mm = 4"-1/16

PROJECT INFO

Date

Client

Project Name


Type/Quantity



Conforms to ANSI/UL Std. 1598
Cert. to CAN/CSA Std. 22.2 No. 250.0



4

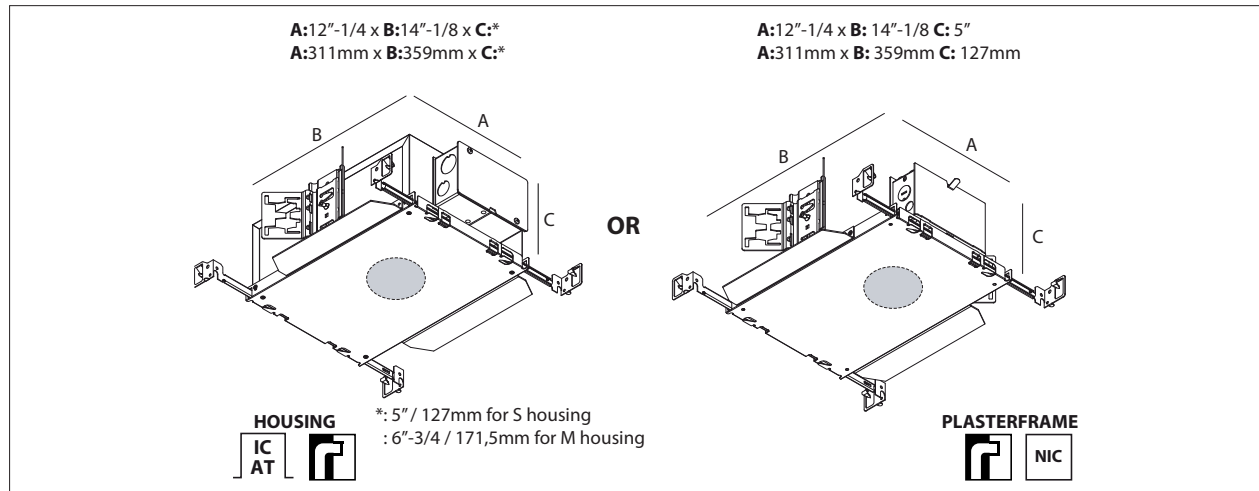
 Indicative opening

HOUSING FOR IC AND/OR AIRTIGHT APPLICATIONS

ROUGH-IN REQUIREMENTS

A B C1 C2 D E1 E2						RANGE	INSTALLATION TYPE	POWER & DIMMING		VOLTAGE 1 - 120V 2 - 277V 3 - 120-277V 4 - 347V*	MOUNTING OPTION 0 - NO BAR HANGERS 1 - BAR HANGERS STANDARD						
A	B	C1		C2								D	E1	E2			
MINIGRID IN TRIMLESS 1 FRAME SI						6	202	7	IC/NIC AT HOUSING S								
									43	12W 500MA 1-10V DIM*		3	120-277V		1	BAR HANGERS STANDARD	
									72	19W 500MA LUTRON ECO DIM**		19	3	120-277V			
									90	15W 500MA MAINS DIM (FE)		1	120V				
MINIGRID IN TRIMLESS 1FRAME SI SOFT						6	202	7	IC/NIC AT HOUSING S			19	1	120V		1	BAR HANGERS STANDARD
									22	13W 650MA MAINS DIM (FE)							
MINIGRID IN TRIMLESS 2 FRAME SI						6	202	2	IC/NIC AT HOUSING M							1	BAR HANGERS STANDARD
									45	25W 500MA 1-10V DIM*		3	120-277V				
									63	11W 500MA MAINS DIM (FE)		20	1	120V			
									89	27W 500MA LUTRON ECO DIM**		3	120-277V				
MINIGRID IN TRIMLESS 2 FRAME SI SOFT						6	202	2	IC/NIC AT HOUSING M			20	1	120V		1	BAR HANGERS STANDARD
									22	13W 650MA MAINS DIM (FE)							

PLASTERFRAME FOR NON-IC APPLICATIONS

						RANGE	INSTALLATION TYPE	POWER & DIMMING		VOLTAGE 1 - 120V 2 - 277V 3 - 120-277V 4 - 347V*	MOUNTING OPTION 0 - NO BAR HANGERS 1 - BAR HANGERS STANDARD					
A	B	C1	C2	D	E1 E2											
.	.	.	.	.	.	A	B	C1		C2		D	E1		E2	
MINIGRID IN TRIMLESS 1 FRAME SI						6	202	01	NIC PLASTERFRAME S	43	12W 500MA 1-10V DIM*	19	1	120V	1	BAR HANGERS STANDARD
										43	12W 500MA 1-10V DIM*		2	277V		
										72	19W 500MA LUTRON ECO DIM**		1	120V		
										72	19W 500MA LUTRON ECO DIM**		2	277V		
										90	15W 500MA MAINS DIM (FE)		1	120V		
MINIGRID IN TRIMLESS 1 FRAME SI SOFT						6	202	01	NIC PLASTERFRAME S	22	13W 650MA MAINS DIM (FE)	19	1	120V	1	BAR HANGERS STANDARD
MINIGRID IN TRIMLESS 2 FRAME SI						6	202	01	NIC PLASTERFRAME S	45	25W 500MA 1-10V DIM*	20	1	120V	1	BAR HANGERS STANDARD
										45	25W 500MA 1-10V DIM*		2	277V		
										63	11W 500MA MAINS DIM (FE)		1	120V		
										89	27W 500MA LUTRON ECO DIM**		1	120V		
										89	27W 500MA LUTRON ECO DIM**		2	277V		
MINIGRID IN TRIMLESS 2 FRAME SI SOFT						6	202	01	NIC PLASTERFRAME S	22	13W 650MA MAINS DIM (FE)	20	1	120V	1	BAR HANGERS STANDARD

*1% DIMMING ON REQUEST

**DIM10: DIMMING BY LUTRON - HI LUME 1% ECO SYSTEM / 3-WIRE DIMMING
 CONSULT FACTORY FOR OTHER DIMMING / 347V
 Conforms to ANSI/UL Std. 1598
 Cert. to CAN/CSA Std. 22.2 No. 250.0
