



## REO 2 S OK

Reo collection is available in orientable single and double fixtures for indoor use.

**DETAILS.**  
**AVAILABLE IN: WHITE**

**SIZE: 7 3/4" L X 4 1/8" D X 2 1/4" H**



**24 W LED; ADJUSTABLE 0°- 30° / 350°**  
**REFLECTORS AVAILABLE IN 33°, 40° OR 50°**

**AVAILABLE IN 2700K & 3000 K – CRI 90**

**\*DIMMABLE LED POWER SUPPLY AVAILABLE.**

**IP20/23 - RATED FOR DAMP LOCATIONS.**

REO 2 S OK

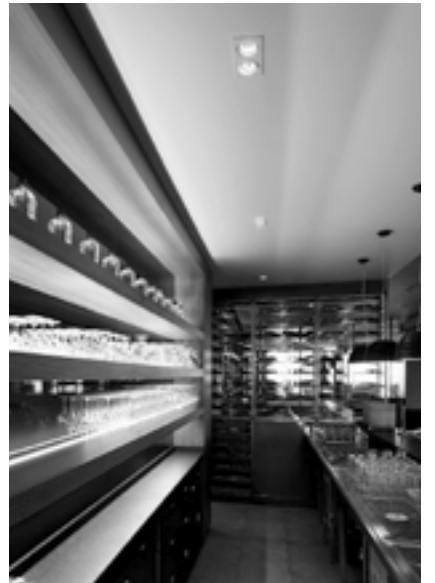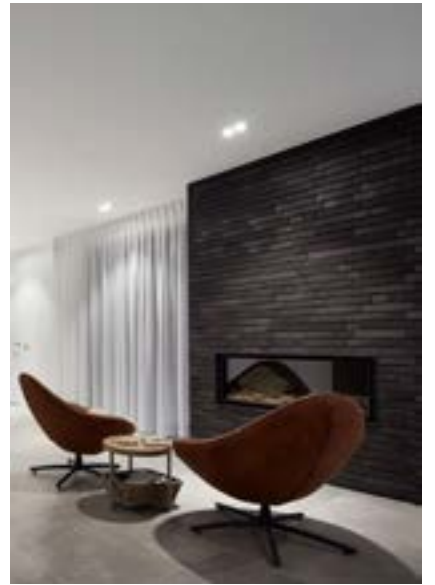



7"-1/2 x 3"-7/8 x 2"-3/4 / max. 1"-3/16

**CRI > 90 REO 2 S OK S1**

**3500 K**  
 2 x LED [H] 10.4W / 1109lm / 500mA  
 2 x LED [H] 15W / 1492lm / 700mA

**REFL FL 33°**  
**6 202 38 812 952** ◇  
 ◇ = A / W

**REFL WFL 50°**  
**6 202 38 812 953** ◇  
 ◇ = A / W

**3000 K**  
 2 x LED [H] 10.4W / 1075lm / 500mA  
 2 x LED [H] 15W / 1446lm / 700mA

**REFL FL 33°**  
**6 202 38 812 932** ◇  
 ◇ = A / W

**REFL WFL 50°**  
**6 202 38 812 933** ◇  
 ◇ = A / W

**2700 K**  
 2 x LED [H] 10.4W / 1032lm / 500mA  
 2 x LED [H] 15W / 1388lm / 700mA



**REFL FL 33°**  
**6 202 38 812 922** ◇  
 ◇ = A / W

**REFL WFL 50°**  
**6 202 38 812 923** ◇  
 ◇ = A / W

ADJUSTABLE 0-30° / 350°

1.8 IP20 DAMP

REQUIREMENTS  
 ROUGH-IN

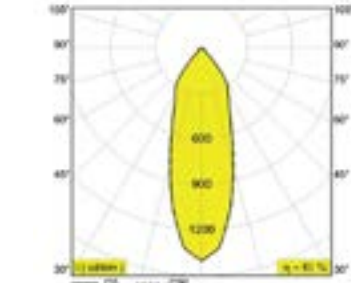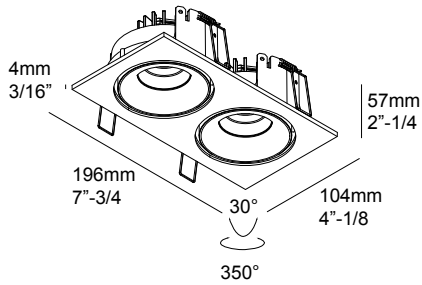

<sup>(1)</sup>Values based on 3000K standard finish

**Application**

Finishing section to be used with DELTA LIGHT rough-in housing or plasterframe.  
 For indoor use only

**Color Finish**

A - Alu Grey  
 W - White

**Light Source**

Two Max. 15W LED included

**Delivered Lumens**

- 1681lm at 2700K<sup>(1)</sup> at 700mA and 33°
- 1681lm at 2700K<sup>(1)</sup> at 700mA and 50°
- 1751lm at 3000K<sup>(1)</sup> at 700mA and 33°
- 1730lm at 3000K<sup>(1)</sup> at 700mA and 50°
- 1806lm at 3500K<sup>(1)</sup> at 700mA and 33°
- 1785lm at 3500K<sup>(1)</sup> at 700mA and 50°

**Power Supply**

Included in rough-in or remodel option.

**Specification features**

Housing fabricated of powder coated steel, powder coated steel trim  
 Pre-installed springs for easy installation  
 Suitable for dry and damp location  
 Weight: 1,8lbs 0,82kg

**Dimensions**

Height: 57mm = 2"-1/4  
 Length: 196mm = 7"-3/4  
 Width: 104mm = 4"-1/8

**PROJECT INFO**

Date \_\_\_\_\_

Client \_\_\_\_\_

Project Name \_\_\_\_\_

Type/Quantity \_\_\_\_\_




Conforms to ANSI/UL Std. 1598  
 Cert. to CAN/CSA Std. 22.2 No. 250.0



Last Update ALLU 26/09/2018

1

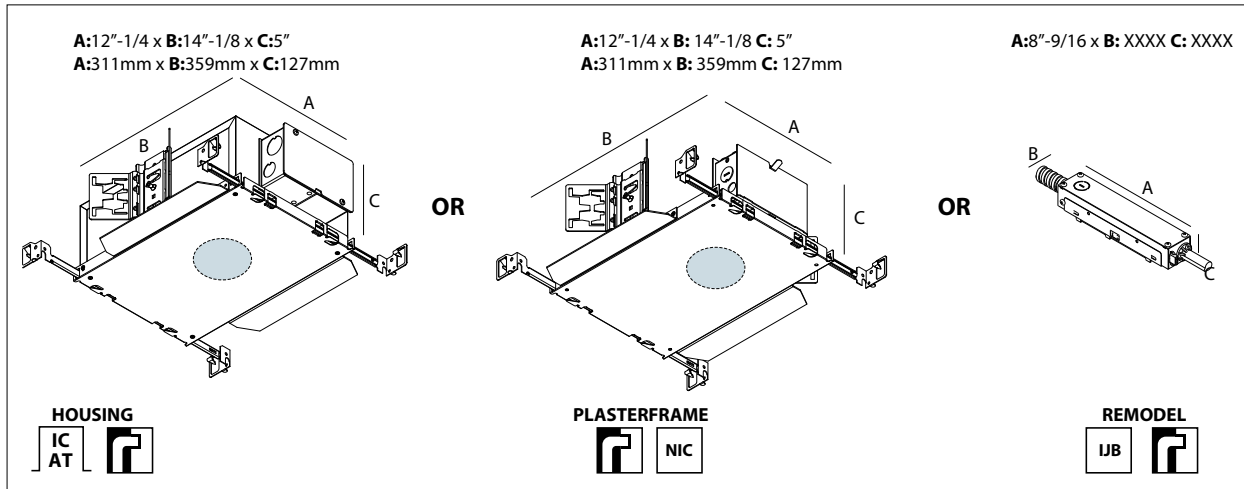

Indicative opening

HOUSING FOR IC AND/OR AIRTIGHT APPLICATIONS

**ROUGH-IN REQUIREMENTS**

A	B	C1	C2	D	E1	E2	RANGE	INSTALLATION TYPE	POWER & DIMMING	VOLTAGE	MOUNTING OPTION			
							A	B	C1	C2	D	E1	E2	
							6	202	7	IC/NIC AT HOUSING S	45 25W 500mA 1-10V DIM* 50 22W 500mA LUTRON ECO DIM** 62 12W 500mA MAINS DIM (FE)	1 - 120V 2 - 277V 3 - 120-277V 4 - 347V*	0 - NO BAR HANGERS 1 - BAR HANGERS STANDARD	
<b>REO 2 S OK</b>											3	120-277V	1	BAR HANGERS STANDARD
										28	3	120-277V		
										1	1	120V		

PLASTERFRAME FOR NON-IC APPLICATIONS

A	B	C1	C2	D	E1	E2	RANGE	INSTALLATION TYPE	POWER & DIMMING	VOLTAGE	MOUNTING OPTION			
							A	B	C1	C2	D	E1	E2	
							6	202	01	NIC PLASTERFRAME S	45 25W 500mA 1-10V DIM* 45 25W 500mA 1-10V DIM* 50 22W 500mA LUTRON ECO DIM** 50 22W 500mA LUTRON ECO DIM** 62 12W 500mA MAINS DIM (FE)	1 - 120V 2 - 277V 3 - 120-277V 4 - 347V*	0 - NO BAR HANGERS 1 - BAR HANGERS STANDARD	
<b>REO 2 S OK</b>											1	120V	1	BAR HANGERS STANDARD
										2	277V			
										28	1	120V		
										2	277V			
										1	120V			

REMODEL NON-IC APPLICATIONS

A	B	C1	C2	D	E1	E2	RANGE	INSTALLATION TYPE	POWER & DIMMING	VOLTAGE	SPACINGS			
							A	B	C1	C2	D	E1	E2	
							2 x 6	202	9	NIC-REMODEL	19 12W 500mA MAINS DIM (FE) 20 25W 500mA 0-10V DIM 20 25W 500mA 0-10V DIM 21 25W 700mA MAINS DIM (FE) 69 25W 700mA 0-10V DIM 69 25W 700mA 0-10V DIM	1 - 120V 1 - 120V 2 - 277V 1 - 120V 1 - 120V 2 - 277V	1 - STANDARD SPACINGS 2 - MARKED SPACINGS	
<b>REO 2 S OK</b>											1	120V	1	STANDARD SPACING
										99	2	277V		
											1	120V	2	MARKED SPACING
										1	120V			
										2	277V			

\*1% DIMMING ON REQUEST  
 \*\*DIM10: DIMMING BY LUTRON - HI LUME 1% ECO SYSTEM / 3-WIRE DIMMING  
 CONSULT FACTORY FOR OTHER DIMMING / 347V



Intertek

Conforms to ANSI/UL Std. 1598  
 Cert. to CAN/CSA Std. 22.2 No. 250.0



2