



REO 2 S OK

Reo collection is available in orientable single and double fixtures for indoor use.

DETAILS.

AVAILABLE IN: WHITE

SIZE: 7 3/4" L X 4 1/8" D X 2 1/4" H

24 W LED; ADJUSTABLE 0°- 30° / 350°
REFLECTORS AVAILABLE IN 33°, 40° OR 50°

AVAILABLE IN 2700K & 3000 K – CRI 90

*DIMMABLE LED POWER SUPPLY AVAILABLE.

IP20/23 - RATED FOR DAMP LOCATIONS.

REO 2 S OK





7"-1/2 x 3"-7/8 x 2"-3/4 / max. 1"-3/16

CRI > 90

REO 2 S OK S1

3500 K

2 x LED [H] 10.4W / 1109lm / 500mA
2 x LED [H] 15W / 1492lm / 700mA



6 202 38 812 952 ◊
◊ = A / W



6 202 38 812 953 ◊
◊ = A / W

3000 K

2 x LED [H] 10.4W / 1075lm / 500mA
2 x LED [H] 15W / 1446lm / 700mA



6 202 38 812 932 ◊
◊ = A / W



6 202 38 812 933 ◊
◊ = A / W

2700 K

2 x LED [H] 10.4W / 1032lm / 500mA
2 x LED [H] 15W / 1388lm / 700mA



6 202 38 812 922 ◊
◊ = A / W





6 202 38 812 923 ◊
◊ = A / W

ADJUSTABLE 0-30° / 350°

1.8 IP20 DAMP

REQUIREMENTS
ROUGH-IN

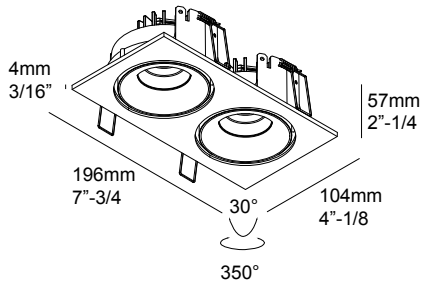

⁽¹⁾Values based on 3000K standard finish

Application

Finishing section to be used with DELTA LIGHT rough-in housing or plasterframe.
For indoor use only

Color Finish

A - Alu Grey
W - White

Light Source

Two Max. 15W LED included

Delivered Lumens

1681lm at 2700K⁽¹⁾ at 700mA and 33°
1681lm at 2700K⁽¹⁾ at 700mA and 50°
1751lm at 3000K⁽¹⁾ at 700mA and 33°
1730lm at 3000K⁽¹⁾ at 700mA and 50°
1806lm at 3500K⁽¹⁾ at 700mA and 33°
1785lm at 3500K⁽¹⁾ at 700mA and 50°

Power Supply

Included in rough-in or remodel option.

Specification features

Housing fabricated of powder coated steel, powder coated steel trim
Pre-installed springs for easy installation
Suitable for dry and damp location
Weight: 1,8lbs 0,82kg

Dimensions

Height: 57mm = 2"-1/4
Length: 196mm = 7"-3/4
Width: 104mm = 4"-1/8

PROJECT INFO

Date _____

Client _____

Project Name _____

Type/Quantity _____




Conforms to ANSI/UL Std. 1598
Cert. to CAN/CSA Std. 22.2 No. 250.0



Last Update ALLU 26/09/2018

1

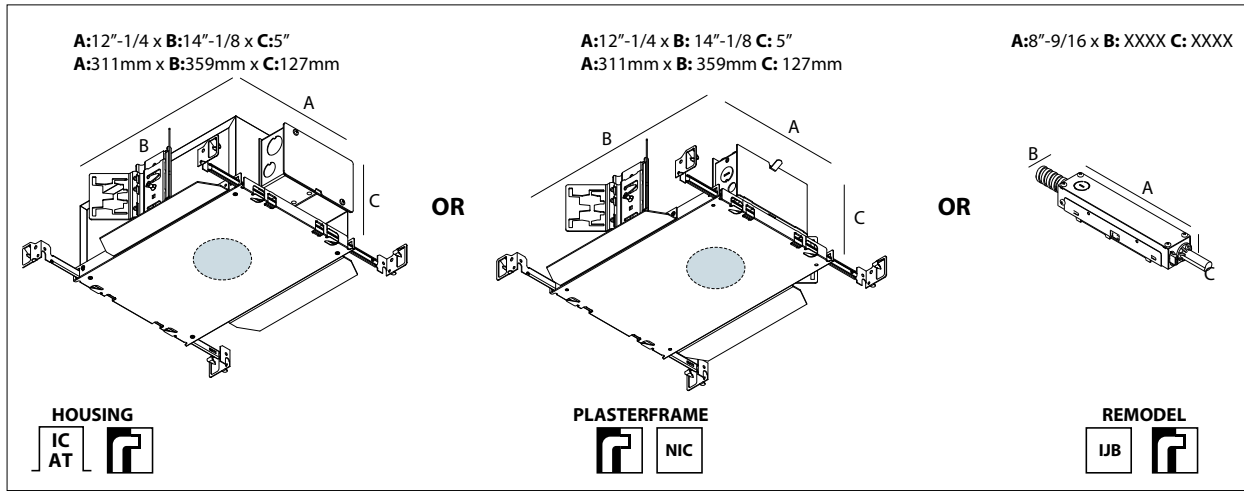

Indicative opening

HOUSING FOR IC AND/OR AIRTIGHT APPLICATIONS

ROUGH-IN REQUIREMENTS

A	B	C1	C2	D	E1	E2	RANGE	INSTALLATION TYPE	POWER & DIMMING	VOLTAGE	MOUNTING OPTION		
							A	B	C1	C2	D	E1	E2
							6	202	7	IC/NIC AT HOUSING S	45 25W 500mA 1-10V DIM* 50 22W 500mA LUTRON ECO DIM** 62 12W 500mA MAINS DIM (FE)	3 120-277V 3 120-277V 1 120V	0 - NO BAR HANGERS 1 - BAR HANGERS STANDARD 1 BAR HANGERS STANDARD

PLASTERFRAME FOR NON-IC APPLICATIONS

A	B	C1	C2	D	E1	E2	RANGE	INSTALLATION TYPE	POWER & DIMMING	VOLTAGE	MOUNTING OPTION		
							A	B	C1	C2	D	E1	E2
							6	202	01	NIC PLASTERFRAME S	45 25W 500mA 1-10V DIM* 45 25W 500mA 1-10V DIM* 50 22W 500mA LUTRON ECO DIM** 50 22W 500mA LUTRON ECO DIM** 62 12W 500mA MAINS DIM (FE)	1 120V 2 277V 1 120V 2 277V 1 120V	0 - NO BAR HANGERS 1 - BAR HANGERS STANDARD 1 BAR HANGERS STANDARD

REMODEL NON-IC APPLICATIONS

A	B	C1	C2	D	E1	E2	RANGE	INSTALLATION TYPE	POWER & DIMMING	VOLTAGE	SPACINGS		
							A	B	C1	C2	D	E1	E2
							2 x 6	202	9	NIC-REMODEL	19 12W 500mA MAINS DIM (FE) 20 25W 500mA 0-10V DIM 20 25W 500mA 0-10V DIM 21 25W 700mA MAINS DIM (FE) 69 25W 700mA 0-10V DIM 69 25W 700mA 0-10V DIM	1 120V 1 120V 2 277V 1 120V 1 120V 2 277V	1 STANDARD SPACING 1 STANDARD SPACING 2 MARKED SPACING

*1% DIMMING ON REQUEST
 **DIM10: DIMMING BY LUTRON - HI LUME 1% ECO SYSTEM / 3-WIRE DIMMING
 CONSULT FACTORY FOR OTHER DIMMING / 347V



Conforms to ANSI/UL Std. 1598
 Cert. to CAN/CSA Std. 22.2 No. 250.0



2