



## REO OK

Reo collection is available in orientable single and double fixtures in multiple finishing colors, for indoor use.

**DETAILS.**

**AVAILABLE IN:**

BLACK  
WHITE

**SIZE: 4 1/8" Ø X 2 1/4" H**

**12 W LED; ADJUSTABLE 0°- 30° / 350°  
REFLECTORS AVAILABLE IN 33°, 40° OR 50°**

**AVAILABLE IN 2700K & 3000K – CRI 90**

**\*DIMMABLE LED POWER SUPPLY AVAILABLE.**

**IP20/23 - RATED FOR DAMP LOCATIONS.**

REO OK



REO OK



**II P L**

PLUGLIGHTING.COM  
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE  
STE 108 LOS ANGELES 90038

P. 323 467 5635  
F. 323 467 5634



3"-7/8 x 2"-3/16 / max.1"-3/16

CRI > 90



REO OK S1

<b>4000 K</b>	LED [H] 10.4W / 1148lm / 500mA LED [H] 15W / 1544lm / 700mA
<b>REFL FL 33°</b>	<b>6 202 37 811 942</b> ◇ ◇ = A / B / W
<b>REFL WFL 50°</b>	<b>6 202 37 811 943</b> ◇ ◇ = A / B / W
<b>3500 K</b>	LED [H] 10.4W / 1109lm / 500mA LED [H] 15W / 1492lm / 700mA
<b>REFL FL 33°</b>	<b>6 202 37 811 952</b> ◇ ◇ = A / B / W
<b>REFL WFL 50°</b>	<b>6 202 37 811 953</b> ◇ ◇ = A / B / W
<b>3000 K</b>	LED [H] 10.4W / 1075lm / 500mA LED [H] 15W / 1446lm / 700mA
<b>REFL FL 33°</b>	<b>6 202 37 811 932</b> ◇ ◇ = A / B / W
<b>REFL WFL 50°</b>	<b>6 202 37 811 933</b> ◇ ◇ = A / B / W
<b>2700 K</b>	LED [H] 10.4W / 1032lm / 500mA LED [H] 15W / 1388lm / 700mA
<b>REFL FL 33°</b>	<b>6 202 37 811 922</b> ◇ ◇ = A / B / W
<b>REFL WFL 50°</b>	<b>6 202 37 811 923</b> ◇ ◇ = A / B / W

ADJUSTABLE 0-30° / 350°

0.9 IP20 DAMP

REQUIREMENTS  
ROUGH-IN

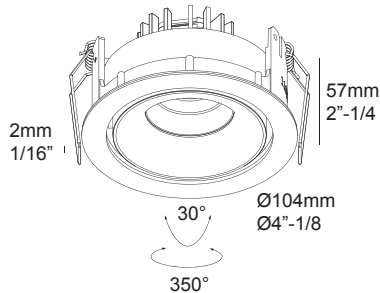

<sup>(1)</sup>Values based on 3000K standard finish

**Application**

Finishing section to be used with DELTA LIGHT rough-in housing or plasterframe.  
For indoor use only

**Color Finish**

B - Black  
W - White  
MMAT - Gold Mat

**Light Source**

One Max. 15W LED included

**Delivered Lumens**

1032lm at 2700K <sup>(1)</sup> at 500mA and 33°	1388lm at 2700K <sup>(1)</sup> at 700mA and 33°
1032lm at 2700K <sup>(1)</sup> at 500mA and 50°	1388lm at 2700K <sup>(1)</sup> at 700mA and 50°
1075lm at 3000K <sup>(1)</sup> at 500mA and 33°	1446lm at 3000K <sup>(1)</sup> at 700mA and 33°
1075lm at 3000K <sup>(1)</sup> at 500mA and 50°	1446lm at 3000K <sup>(1)</sup> at 700mA and 50°
1109lm at 3500K <sup>(1)</sup> at 500mA and 33°	1492lm at 3500K <sup>(1)</sup> at 700mA and 33°
1109lm at 3500K <sup>(1)</sup> at 500mA and 50°	1492lm at 3500K <sup>(1)</sup> at 700mA and 50°
1148lm at 4000K <sup>(1)</sup> at 500mA and 33°	1544lm at 4000K <sup>(1)</sup> at 700mA and 33°
1148lm at 4000K <sup>(1)</sup> at 500mA and 50°	1544lm at 4000K <sup>(1)</sup> at 700mA and 50°

**Power Supply**

Included in rough-in or remodel option.

**Specification features**

Housing fabricated of powder coated steel, powder coated steel trim  
Pre-installed springs for easy installation  
Suitable for dry and damp location  
Weight: 0,9lbs 0,41kg

**Dimensions**

Height: 56mm = 2"-3/16  
Diameter: Ø82mm = Ø3"-1/4

**PROJECT INFO**

Date

---

Client

---

Project Name

---

Type/Quantity

---



Conforms to ANSI/UL Std. 1598  
Cert. to CAN/CSA Std. 22.2 No. 250.0



Last Update ALLU 22/05/2019

1



CRI > 90

REO OK SOFT S1



LED 10W / 565lm / 650mA





6 202 37 1902 ◊  
◊ = A / B / W

ADJUSTABLE 0-30° / 350°

0.9 IP20 DAMP

REQUIREMENTS  
ROUGH-IN

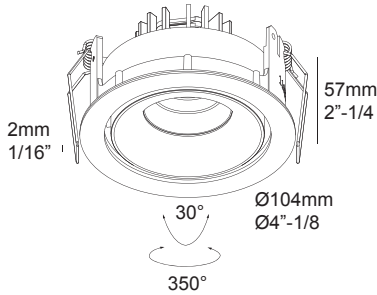

<sup>(1)</sup>Values based on 3000K standard finish

**Application**

Finishing section to be used with DELTA LIGHT rough-in housing or plasterframe.  
For indoor use only

**Color Finish**

B - Black  
W - White  
MMAT - Gold Mat

**Light Source**

One Max. 10W LED included

**Delivered Lumens**

565lm at 1800-2700K<sup>(1)</sup> at 650mA and 40°

**Power Supply**

Included in rough-in or remodel option.

**Specification features**

Housing fabricated of powder coated steel, powder coated steel trim  
Pre-installed springs for easy installation  
Suitable for dry and damp location  
Weight: 0,9lbs 0,41kg

**Dimensions**

Height: 56mm = 2"-3/16  
Diameter: Ø82mm = Ø3"-1/4

**PROJECT INFO**

Date

---

Client

---

Project Name

---


Type/Quantity

---



Conforms to ANSI/UL Std. 1598  
Cert. to CAN/CSA Std. 22.2 No. 250.0



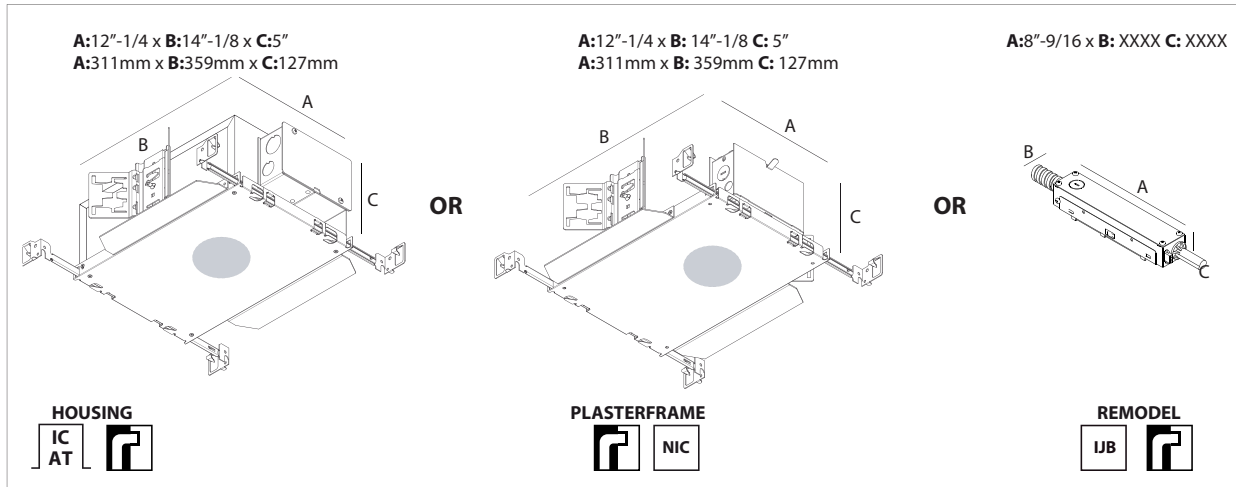

● Indicative opening

HOUSING FOR IC AND/OR AIRTIGHT APPLICATIONS

ROUGH-IN REQUIREMENTS

A B C1 C2 D E1 E2						RANGE	INSTALLATION TYPE	POWER & DIMMING	VOLTAGE	MOUNTING OPTION			
A B C1						A B C1		C2	D E1	E2			
REO OK						6	202	7	IC/NIC AT HOUSING S	43 12W 500mA 1-10V DIM*	3 120-277V	1	BAR HANGERS STANDARD
								62 12W 500mA MAINS DIM (FE)	46 1 120V	1			
								72 19W 500mA LUTRON ECO DIM**	3 120-277V	3			

PLASTERFRAME FOR NON-IC APPLICATIONS

A B C1 C2 D E1 E2						RANGE	INSTALLATION TYPE	POWER & DIMMING	VOLTAGE	MOUNTING OPTION			
A B C1						A B C1		C2	D E1	E2			
REO OK						6	202	01	NIC PLASTERFRAME S	43 12W 500mA 1-10V DIM*	1 120V		
								43 12W 500mA 1-10V DIM*	2 277V	2			
								62 12W 500mA MAINS DIM (FE)	46 1 120V	1	BAR HANGERS STANDARD		
								72 19W 500mA LUTRON ECO DIM**	1 120V	1			
								72 19W 500mA LUTRON ECO DIM**	2 277V	2			
REO OK SOFT						6	202	01	NIC PLASTERFRAME S	22 13W 650mA MAINS DIM (FE)	46 1 120V	1	BAR HANGERS STANDARD

REMODEL NON-IC APPLICATIONS

A B C1 C2 D E1 E2						RANGE	INSTALLATION TYPE	POWER & DIMMING	VOLTAGE	SPACINGS			
A B C1						A B C1		C2	D E1	E2			
REO OK						6	202	9	NIC-REMODEL	19 12W 500mA MAINS DIM (FE)	1 120V	1	STANDARD SPACING
								20 25W 500mA 0-10V DIM	1 120V	1			
								20 25W 500mA 0-10V DIM	2 277V	2			
								21 25W 700mA MAINS DIM (FE)	99 1 120V	1			
								69 25W 700mA 0-10V DIM	1 120V	1	MARKED SPACING		
								69 25W 700mA 0-10V DIM	2 277V	2			
REO OK SOFT						6	202	9	NIC-REMODEL	22 13W 650mA MAINS DIM (FE)	99 1 120V	2	MARKED SPACING

\*1% DIMMING ON REQUEST  
 \*\*DIM10: DIMMING BY LUTRON - HI LUME 1% ECO SYSTEM / 3-WIRE DIMMING  
 CONSULT FACTORY FOR OTHER DIMMING / 347V



Conforms to ANSI/UL Std. 1598  
 Cert. to CAN/CSA Std. 22.2 No. 250.0



3