



OHM

Light runs along a wire. An almost imperceptible wire hung in the air. With this wall system, the light goes where it's needed.

Ohm is an electro mechanic project that takes maximum advantage of the characteristics of luminous diodes. The secret of Ohm is a special unipolar wire stretched from wall to wall.

Available as Ohm Absolute (wall to wall system) with two tie rods or Ohm Roundtrip (wall surround system) with white ceiling rose and four wire guides.

Finish: Standard Black

DETAILS.

OHM ABSOLUTE, MAX 350MA DC:

UNIPOLAR WIRE LENGTH: MAX 472.4" (12M)

TIE ROD: Ø4.4" X 1.9" H

SHADE SIZE: Ø2.4" X 4.3" H

LED DRIVER INCLUDED 110-240V

***MAX 4 SPOTS ON UNIPOLAR WIRE.**

OHM ROUNDTrip, 120V:

UNIPOLAR WIRE LENGTH: MAX 944.9" (24M)

WALL ROSE: 6.7" H X 14" W X 2.3" D

SHADE SIZE: Ø2.4" X 4.3" H

WIRE GUIDE: Ø0.7" X 1.3" H

1 X 3.2W LED 3000K 300 LM






1-10V DIMMABLE

***AVAILABLE IN 2700K.**

BEAM ANGLES: 12° OR 24°

***OPTIONAL ACCESSORIES NOT INCLUDED.**

OHM

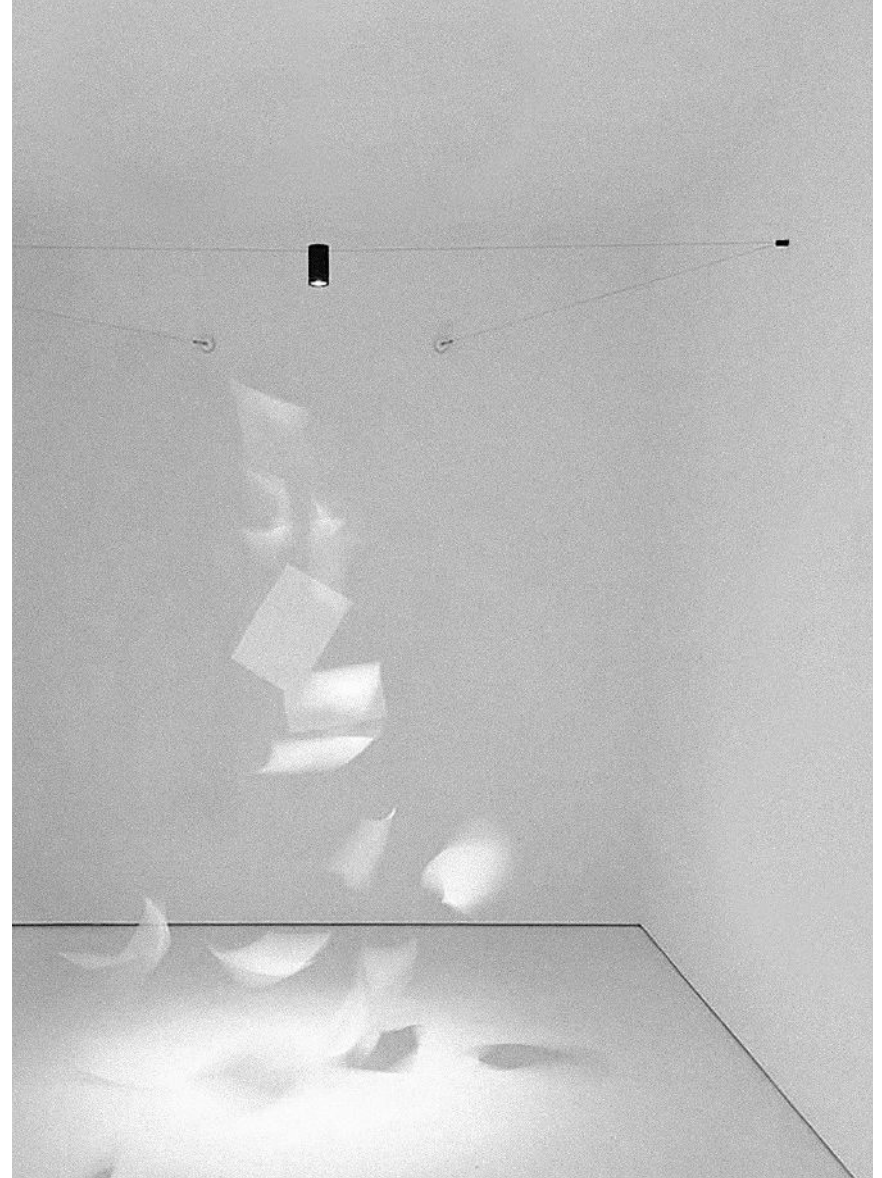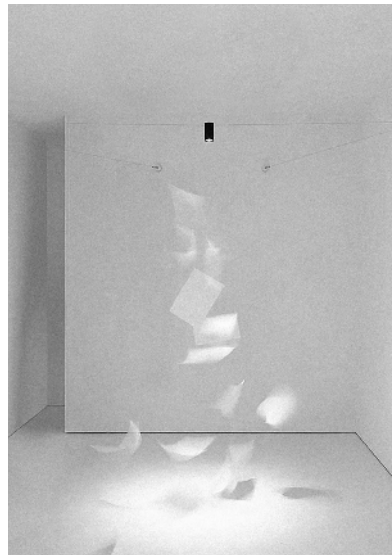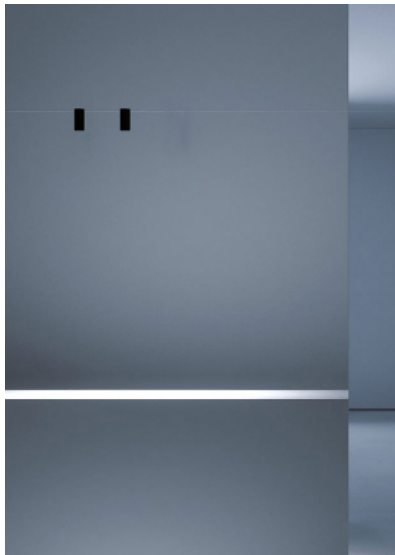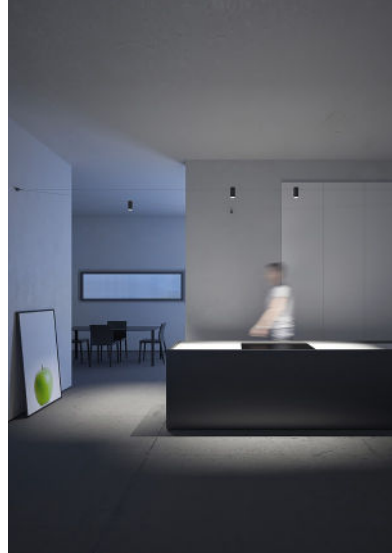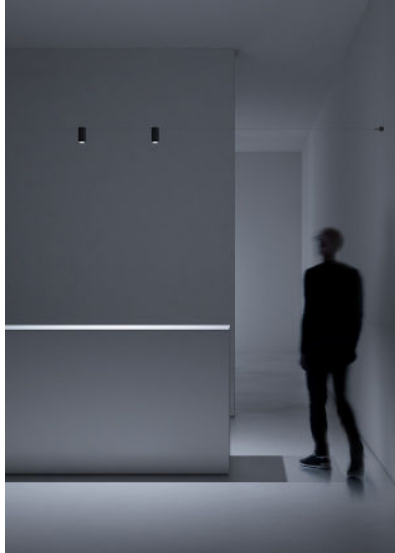


II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

OHM

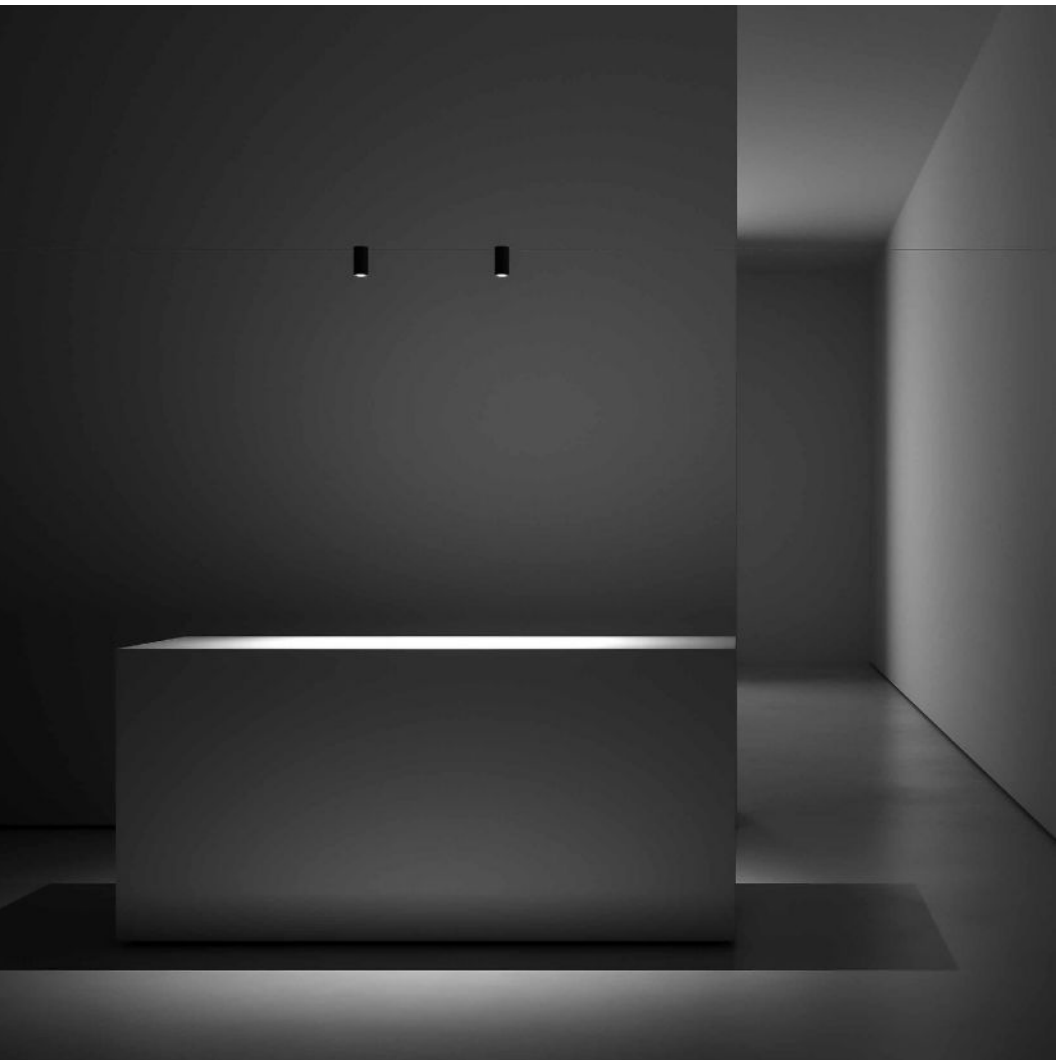

II P L



PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

The sizes are expressed in millimeters.

WALL SYSTEM - METAL - PA

OHM ABSOLUTE

TIE ROD




1A0760403	STANDARD 12° - 3000K	MAX 350 mA DC - 1 x 3,2 W LED - 12° - 300 lm - CRI > 95
1A0760403-27	STANDARD 12° - 2700K	UNIPOLAR WIRE 12 m - 2 TIE RODS - MAX 4 SPOT ON UNIPOLAR WIRE
		COMPULSORY POWER SUPPLY KIT INCLUDED
		INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI - PUSH - 1-10V DIMMABLE
		OPTIONAL ACCESSORIES NOT INCLUDED
1A0460403	STANDARD 24° - 3000K	MAX 350 mA DC - 1 x 3,2 W LED - 24° - 300 lm - CRI > 95
1A0460403-27	STANDARD 24° - 2700K	UNIPOLAR WIRE 12 m - 2 TIE RODS - MAX 4 SPOT ON UNIPOLAR WIRE
		COMPULSORY POWER SUPPLY KIT INCLUDED
		INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI - PUSH - 1-10V DIMMABLE
		OPTIONAL ACCESSORIES NOT INCLUDED

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634


OHM

POWER SUPPLY KIT

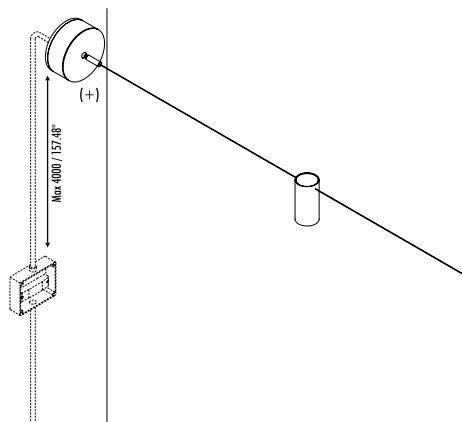


DRIVER DIMENSION

• 79 / 3.11" • • 124 / 4.88" •
22' 0.87"

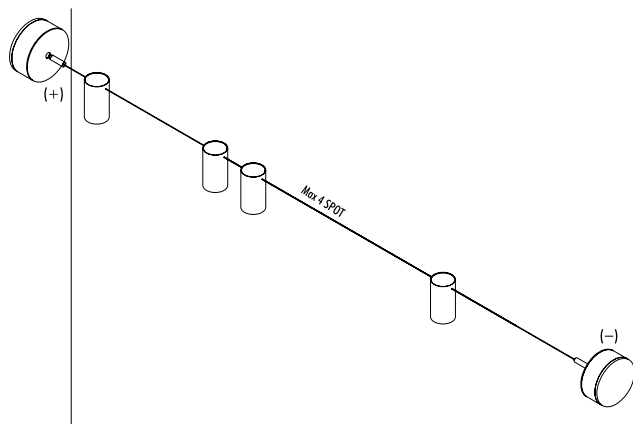

LAYOUT EXAMPLE

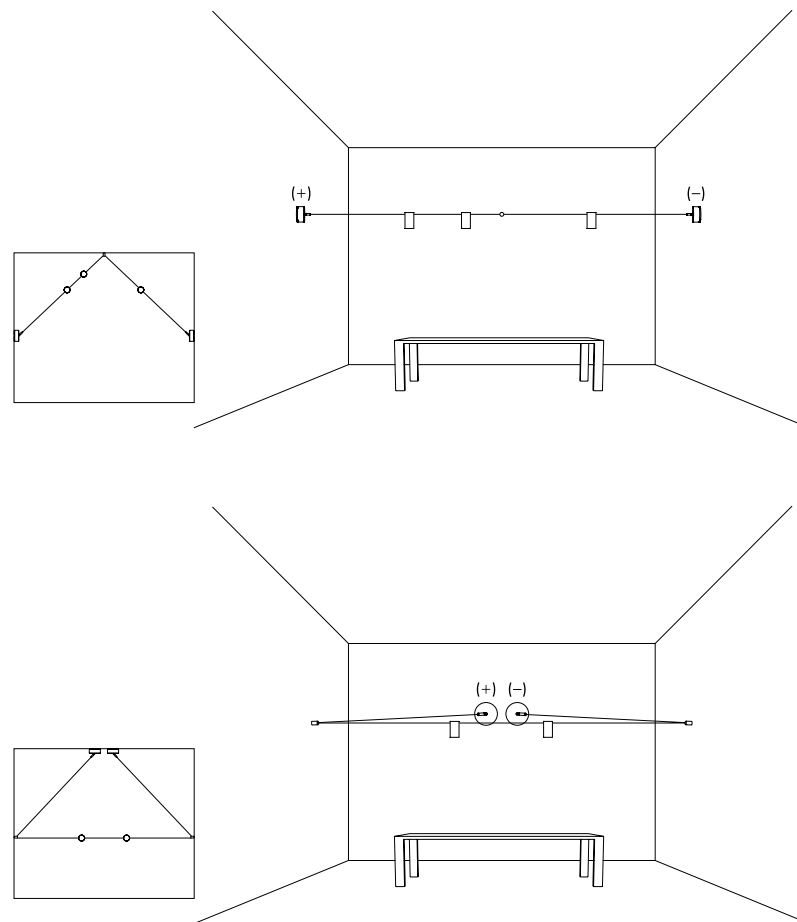

OHM ABSOLUTE


I I P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

OHM

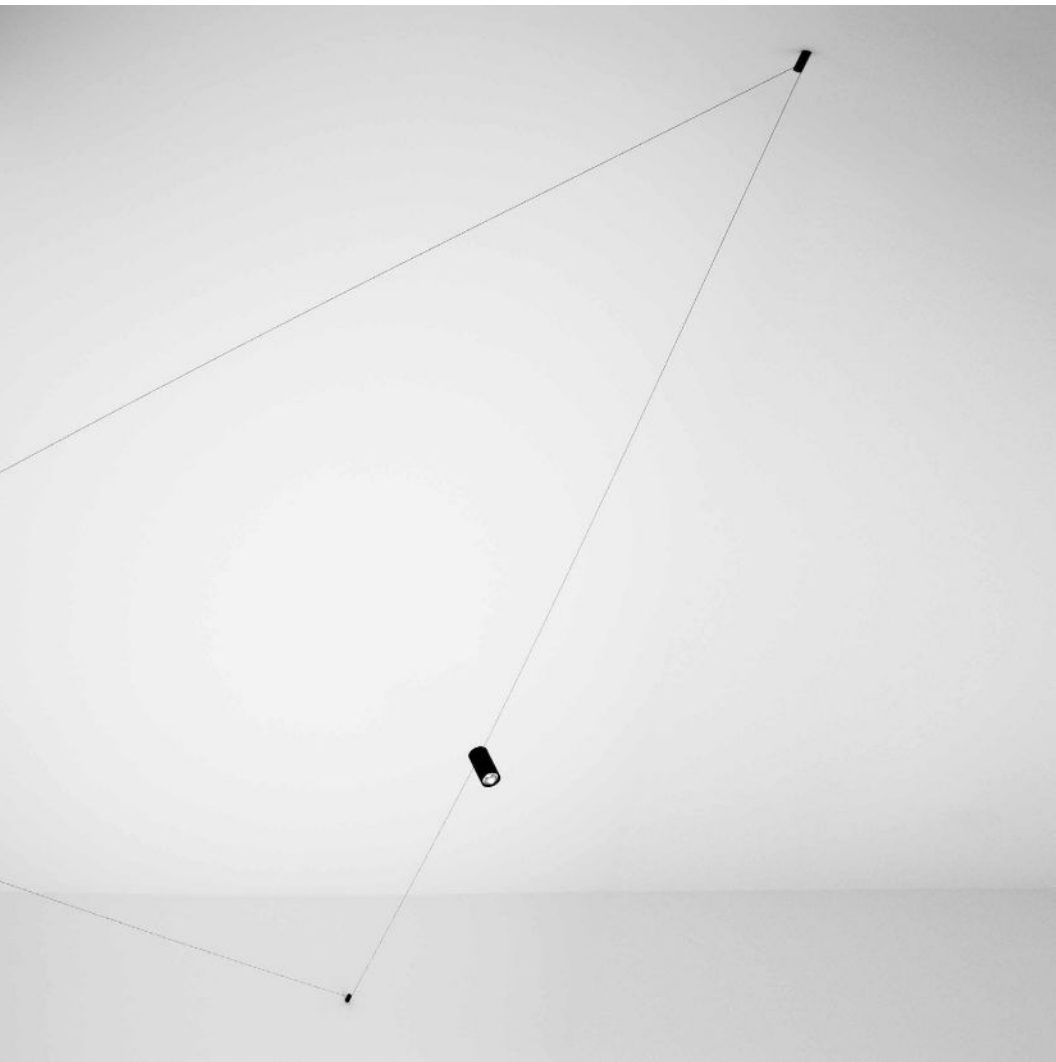

II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM



5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

WALL SYSTEM - METAL - PA

OHM ROUNDRIP


WALL ROSE




1A0750403	STANDARD 12" - 3000K	120 V - 60 Hz - 1 x 3,2 W LED - 12" - 300 lm - CRI > 95
1A0750403-27	STANDARD 12" - 2700K	UNIPOLAR WIRE 24 m - 4 WIRES GUIDE
		WHITE WALL ROSE
		DALI - PUSH - 1-10V DIMMABLE
		OPTIONAL ACCESSORIES NOT INCLUDED
19780403	STANDARD 24" - 3000K	120 V - 60 Hz - 1 x 3,2 W LED - 24" - 300 lm - CRI > 95
19780403-27	STANDARD 24" - 2700K	UNIPOLAR WIRE 24 m - 4 WIRES GUIDE
		WHITE WALL ROSE
		DALI - PUSH - 1-10V DIMMABLE
		OPTIONAL ACCESSORIES NOT INCLUDED

OHM

LAYOUT EXAMPLE

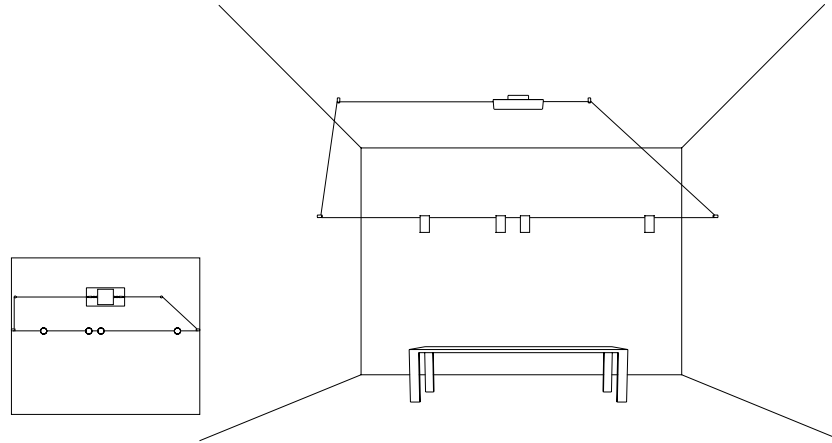

OHM ROUNDTrip

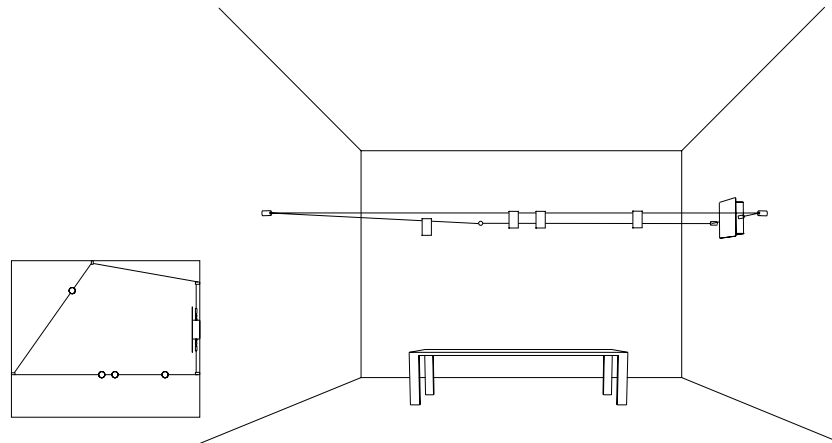

II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

OHM



OPTIONAL ACCESSORIES

1A0040403	MATT BLACK - 12" - 3000K	ADDITIONAL LED MODULE MAX 350 mA DC - MAX 3,2 W LED - 12" - 300 lm - CRI > 95 MAX 4 SPOT ON UNIPOLAR WIRE	• 110 / 4.33" • 60 / 2.36"
1A0040403-27	MATT BLACK - 12" - 2700K		
1A0740403	MATT BLACK - 24" - 3000K	ADDITIONAL LED MODULE MAX 350 mA DC - MAX 3,2 W LED - 24" - 300 lm - CRI > 95 MAX 4 SPOT ON UNIPOLAR WIRE	• 110 / 4.33" • 60 / 2.36"
1A0740403-27	MATT BLACK - 24" - 2700K		
1A0420403	MATT BLACK - 3000K	WIRE GUIDE	34 / 1.34" • 18 / 0.71"

OHM ABSOLUTE / OHM ROUNDTrip

II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634