



## CALZADA P

Path light incorporates LED technology designed so that its entire top is utilized as a heatsink. Calzada delivers reliable low maintenance service and provides extremely rugged construction to last a lifetime. Calzada P is available in multiple finishes and accessories.

### DETAILS.

#### MATERIALS AVAILABLE IN:

AL - ALUMINUM

BR - BRASS

CU - COPPER

#### FINISHES AVAILABLE IN:

N - NATURAL

BK - BLACK

WT - WHITE

BN - BROWN

GN - GREEN

MP - SILVER

NK - NICKEL

PT - PATINA

C - CUSTOM

SIZE: Ø3.5" SHADE X Ø18.3" OAH

3.7W LED, CRI 80

#### COLOR TEMPS AVAILABLE:

2700K, 3000K, 4000K, 5700K

CABLE LEAD: 3FT 18-2 AWG


IP66 - SUITABLE FOR WET LOCATIONS.

REMOTE LOW VOLTAGE TRANSFORMER REQUIRED.

\*OTHER MOUNTING OPTIONS AND ACCESSORIES AVAILABLE.

ETL LISTED

## CALZADA P

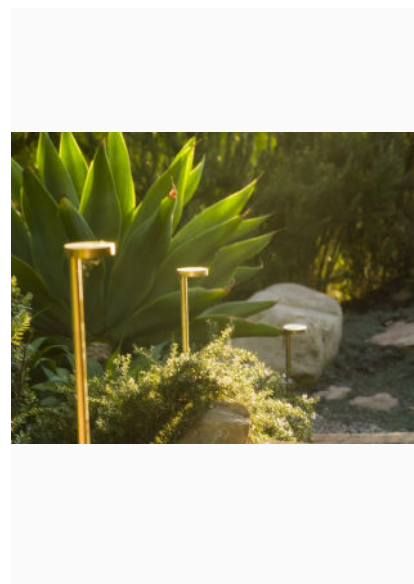

**II P L**

PLUGLIGHTING.COM  
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE  
STE 108 LOS ANGELES 90038


P. 323 467 5635  
F. 323 467 5634

The Calzada P is a minimalist low energy area light. Decoratively crafted design adds essential safety and security. Superior lasting LED technology delivers reliable low maintenance lighting service. Extremely rugged construction provides a lifetime of service.

Engineered specifically for today's LED technology the Calzada P's design provides critical thermal transfer. Excellent heat removal ensures high performance and reliability of its LED light source. Other features include anti-wicking power lead and service upgrade capability.

The Calzada P is available in multiple finishes and accessories. Suitable for use in wet locations.

## Specification


Light Source	Lighting Class LED*
LED Rated Life	50,000 hours average **
Input	7-15Vac
Power Consumption	3.7 Watts
Standard LED Color	2700K +/- 175 CCT Typical
CRI	80 Typical
Lens Cover	3/16 inch Clear Acrylic
Cable Lead	3ft 18-2 AWG Direct Burial Rated
Standard Mounting	ABS Cap and PVC Post
Operating Temperature	-31F to 122F (-35C to 50C)
Maintenance	Field serviceable Driver Cable and LED module
Thermal Management	Fixture is utilized as heat sink
Ingress Protection	IP66
Certification	

\* IES LM-80 Standard ensures led light source will provide lumen maintenance and color performance.


\*\* LED life is defined as the time to 70% lumen maintenance (L70)

**Remote Low Voltage Transformer Required**

## Dimensions inches [ mm ]

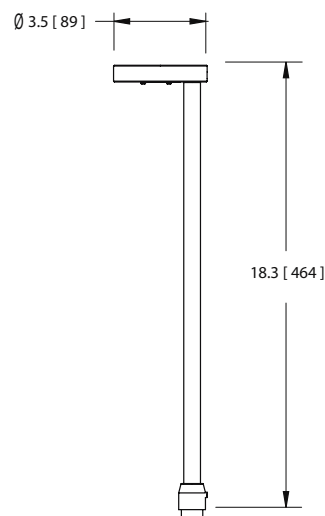

## Mounting Options ( Not to Scale )

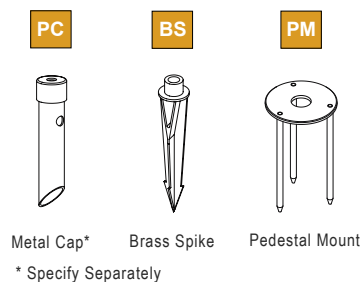

## Ordering Guide

Example: **CZP-BR-27-18-N-PM** Calzada P, Brass, 2700K, 18 inch post, Natural Finish, Pedestal Mount

Prefix	Material	LED Color	Finish	Mounting
CZP	AL - Aluminum	27 - 2700K	N - Natural	PV - ABS Cap PVC Post (Standard)
	BR - Brass	30 - 3000K	BK - Black	PC - Metal Cap *
	CU - Copper	40 - 4000K	WT - White	BS - Cast Brass Spike
		57 - 5700K	BN - Brown	PM - Pedestal Mount *
			GN - Green	
			MP - Silver	* Specify Separately
			NK - Nickel	
			PT - Patina	
			C - Custom	



Document Number: S-CZP  
Released Date: 11-02-13