



CUBE WALL LITE

The wall lite can be used as a spot light or it can be locked into place for use as an uplight or downlight. Double version available (Cube Pillar Lite) illuminates both upwards and downwards, giving columns, gateway pillars and entrances a dramatic effect.

DETAILS.

FINISHES AVAILABLE IN:

ALUMINUM POWDERCOAT- BLACK, BRONZE, OLIVE GREEN, WHITE, WHITE BIRCH, DARK GREY, SILVER STAR, CORTEN
316 STAINLESS STEEL

SIZE: 1 9/16" H X 1 3/4" W X 2 3/8" D

MAX 1050MA, CRI 90

COLOR TEMPS AVAILABLE:

2700K, 3000K, 4000K

*AMBER, BLUE, GREEN, RED COLOR AVAILABLE.

BEAM OPTIONS:

15°, 25°, 45°

POWER OPTIONS:

S - SERIES, REMOTE DRIVER

*REMOTE DRIVER WIRED IN SERIES. INTERNAL DRIVER WIRED IN PARALLEL.

IP66 - RATED FOR WET LOCATIONS.

*OTHER ACCESSORIES AND LAMP OPTIONS AVAILABLE.

UL LISTED

CUBE WALL LITE




Cube Wall Lite

PURE LED

SPECIFICATIONS



LED Chip	Cree XPG-3 Plug and Play field replaceable LED board
Luminaire Output Per Head	120 Lumens @ 1050mA, delivered from luminaire with unobstructed beam.
Lumens Per Watt	60 Lumens minimum @ 3 watts delivered from luminaire with unobstructed beam.
CRI (3000K)	90+
Colour Temperatures	2700K, 3000K, 4000K, Amber, Blue, Green, Red
Beam Angles	15, 25, 45
Ingress Protection	IP66
Warranty	Electronics = 5 years Body Aluminium = 5 years
Standards	AS/NZS 61046 cUL 1838, 2108 CSA 22.2 No. 250.7, No. 250.0-08, No. 250.0 CE

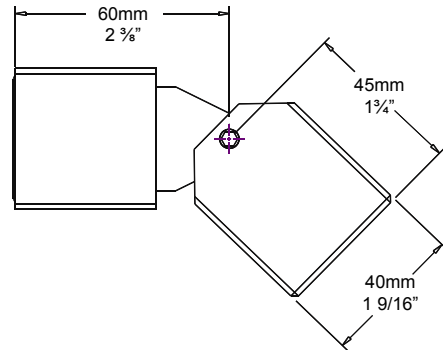

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. CWL/L

Luminaire	Power	Material/ Finish	Beam	Colour	Accessories
CWL/L					
S		ALUMINIUM	15 15°	2 2700K	CJK CABLE JOINT KIT
		EBK BLACK	25 25°	3 3000K	DM DUAL MOUNTING FIXED PLATE
		EBZ BRONZE	45 45°	4 4000K	DMA DUAL MOUNTING ADJUSTABLE PLATE
		EOGR OLIVE GREEN		A AMBER	
		EWH WHITE		B BLUE	
		EWB WHITE BIRCH		G GREEN	
		EDG DARK GREY		R RED	
		ESTAR SILVER STAR			
		ECT CORTEN			
		SS STAINLESS STEEL			

SERIES, REMOTE DRIVER REQUIRED:
Constant current driver
Individual fixtures require 3vdc @ 1050mA maximum

ADDITIONAL COMMENTS:

LUMINAIRE CONSTRUCTION

CNC machined from one of the following metals:

Aluminium:

Body: High corrosion resistant 40mm (1½") x 40mm (1½") solid aluminium square bar.
 Head: 40mm (1½") x 40mm (1½") solid aluminium square bar with chromate substrate and high UV resistant polyester powder coat.
 Colours:
 Black, Bronze, Silver Star, White, White Birch, Olive Green, Dark Grey, Corten.

316 Stainless Steel:

Body: 40mm (1½") x 40mm (1½") 316 stainless steel.
 Head: 40mm (1½") x 40mm (1½") 316 stainless steel.

Lens:

Acrylic TIR lens.

Mounting:

The luminaire is mounted to the wall using two 5 gauge screws through a mounting disk.

Luminaire Weight:


Alum: 0.775kg (1lb 11oz)

ACCESSORIES


BEAM ANGLES

High efficiency PMMA TIR lenses. Field replaceable


IES files available for download: hunzalighting.com/downloads

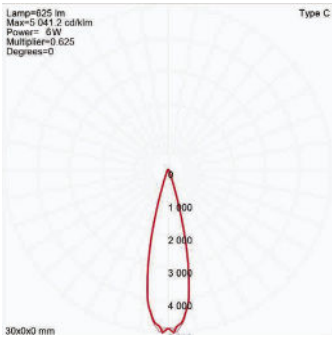

15° FWHM TIR




25° FWHM TIR

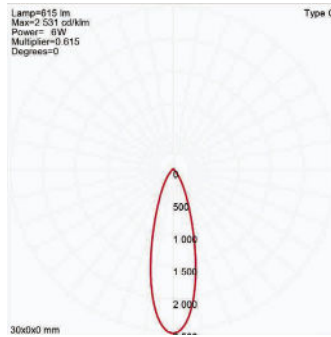

45° FWHM TIR

WIRING GUIDE


Series/remote driver

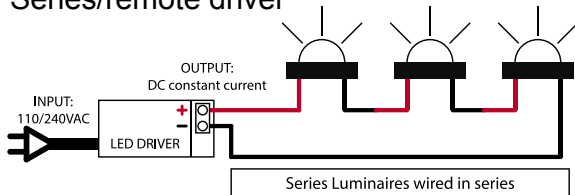

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

Available for download: hunzalighting.com/downloads

12v integral driver

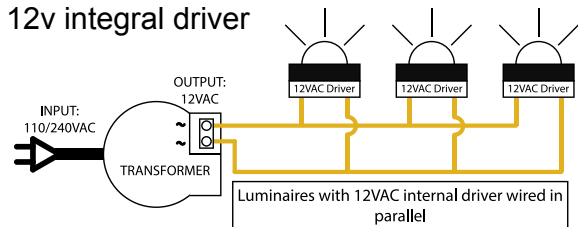


FINISHES

Powdercoated Aluminium



Solid Metals

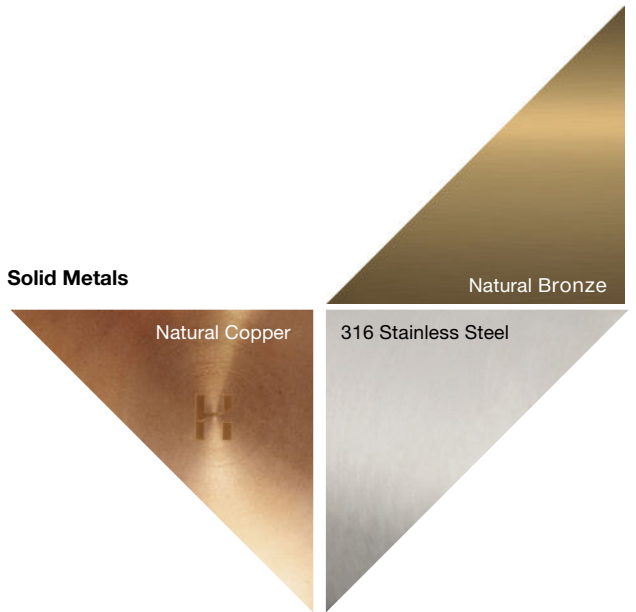

- Due to the limitation of print and screen resolution these colours should be used as a general guide only
- Solid copper and bronze are natural finishes designed to gradually weather & patina
- Solid stainless steel may acquire a surface tarnish in certain environments. Regular washing is recommended to avoid this.