



MONOPOL LED

LED floor lamp fixture with an asymmetrical beam which lights the ground.
Available in two sizes.

DETAILS.

FINISHES AVAILABLE IN:

ALU GREY

GREY BROWN

MEDIUM (26 LED): 2 7/16" W X 5" D X 10 1/4" H

8W 434 LM 53 LM/W

CRI 90 120V

LARGE (70 LED): 2 7/16" W X 5" D X 27 9/16" H

8W 434 LM 53 LM/W

CRI 90 120V

COLOR TEMPS AVAILABLE:

3000K OR 3500K

DIMMABLE LED POWER SUPPLY INCLUDED – 350MA DC

INCLUDES 1X CABLE 3 X 18 AWG 5'




*OTHER ACCESSORIES AVAILABLE.

IP55 – SUITABLE FOR WET LOCATIONS.

ETL LISTED

*OTHER VOLTAGES OR DIMMING OPTIONS AVAILABLE.

MONOPOL LED

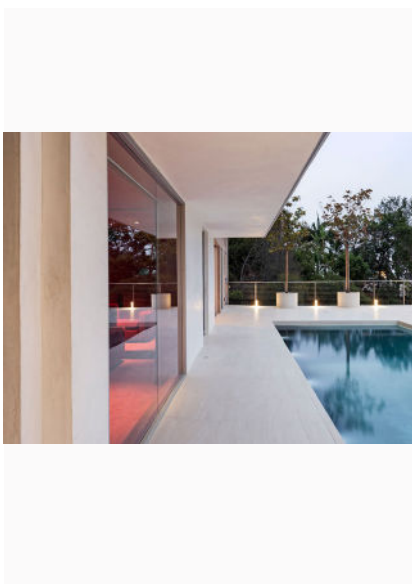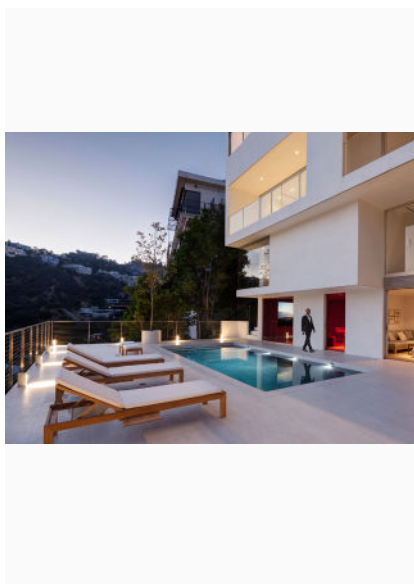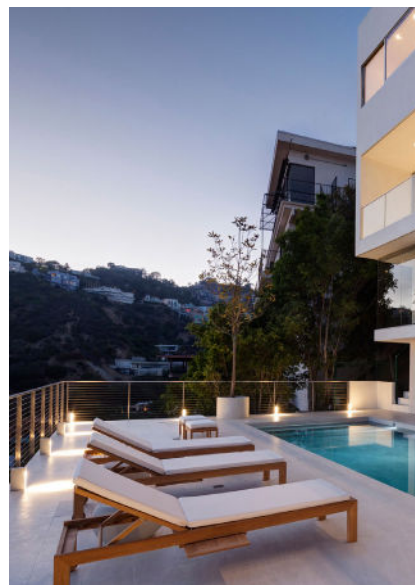

CRI > 90

MONOPOL LED

3500
K

LED 7.1W / 798lm / 350mA

FE

260mm 6 223 16 811 950 ED8 ◇
◇ = A / G700mm 6 223 17 811 950 ED8 ◇
◇ = A / G3000
K

LED 7.1W / 774lm / 350mA

FE



260mm 6 223 16 811 930 ED8 ◇
◇ = A / G700mm 6 223 17 811 930 ED8 ◇
◇ = A / GINCL 1 x CABLE 3 x 18 AWG 5'
MAINS DIMMING (FE)
120V / 60Hz

IP55 WET

FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION

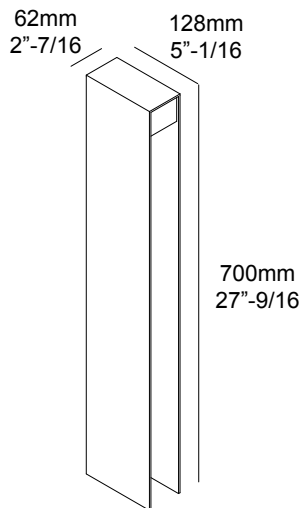JUNCTION BOX 5"-1/2 x 5"-1/2 x 6"-13/16
6 216 12 00IP67 CONNECTOR 3P Ø 1"-1/16 x 6"-5/8
6 216 12 02PIN 1 2"-1/4 x 2"-1/4 x 11"
229 01 01PLATE 1 7"-7/8 x 7"-7/8 x 1/8"
229 02 01⁽¹⁾Values based on 3000K Standard finish

Application

Floor surface mounted
For indoor & outdoor use

Color Finish

G - Grey Brown
A - Alu Grey

Light Source

One 7,1W LED module included

Delivered Lumens

412lm at 3000K⁽¹⁾
425lm at 3500K⁽¹⁾

Power Supply

Dimmable electronic power supply included. 120V input, 60Hz - 500mA current controlled
class 2 output. Mains dimmable (100-1% lightoutput)

Specification features

Powder coated corrosion protected aluminum housing
Provided with a 6' SJ00W cable
Suitable for wet locations
Dust-protected
Protected against water jets IP55
Weight:**MONOPOL LED 260mm**
2,6lbs - 1,18kg**MONOPOL LED 700mm**
5,9lbs 2,68kg

Dimensions

MONOPOL LED 260mmHeight: 260mm = 10"-1/4
Width: 128mm = 5"-1/16
Length: 62mm = 2"-7/16**MONOPOL LED 700mm**Height: 700mm = 27"-9/16
Width: 128mm = 5"-1/16
Length: 62mm = 2"-7/16

PROJECT INFO

Date

Client

Project Name

Type/Quantity

Conforms to ANSI/UL Std. 1598
Cert. to CAN/CSA Std. 22.2 No. 250.0

Last Update ALLU 24/08/2018

A

PART
PARTIE
PARTIE

1