



## MONTUR S P

Exterior bollard with a light source that is contained within the framing of a 3D square or rectangular shape with LED clusters finished with hand pressed opal glass – 3 sizes available.

### DETAILS.

#### FINISHES AVAILABLE IN:

BLACK

ALU GRAY

**SMALL (30 LED):** 5 15/16" W X 5 15/16" D X 12 5/8" H  
7W 485 LM 67 LM/W  
CRI 80 3000K 120V

**MEDIUM (65 LED):** 5 15/16" W X 5 15/16" D X 26 3/8" H  
7W 485 LM 67 LM/W  
CRI 80 3000K 120V

**LARGE (90 LED):** 5 15/16" W X 5 15/16" D X 36 1/4" H  
7W 485 LM 67 LM/W  
CRI 80 3000K 120V

LED POWER SUPPLY INCLUDED – 350MA DC

INCLUDES 1X CABLE 3 X 18 AWG 6'

\*OTHER ACCESSORIES AVAILABLE.

IP54 – SUITABLE FOR WET LOCATIONS.

ETL LISTED

\*OTHER VOLTAGES OR DIMMING OPTIONS AVAILABLE.

## MONTUR S P



**II P L**

PLUGLIGHTING.COM  
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE  
STE 108 LOS ANGELES 90038

P. 323 467 5635  
F. 323 467 5634

## MONTUR S P



**II P L**

PLUGLIGHTING.COM  
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE  
STE 108 LOS ANGELES 90038

P. 323 467 5635  
F. 323 467 5634

IK07

CRI &gt; 80

MONTUR S P LED

3000  
K

LED 6,3W / 808lm / 350mA

320mm 6 232 432 83 ◇

◇ = A / B

INCL. 1 x CABLE 3 x 18 AWG 6'  
120V / 60Hz

IP55 WET

FULL INFO TECHNICAL CHAPTER

## OPTIONS

## INSTALLATION

## JUNCTION BOX

6 216 12 00

5"-1/2 x 5"-1/2 x 6"-13/16

## IP67 CONNECTOR 3P





6 216 12 02

Ø 1"-1/16 x 6"-5/8

## PLATE 3

229 02 03

3"-3/8 x 3"-3/8 x 9"-11/16

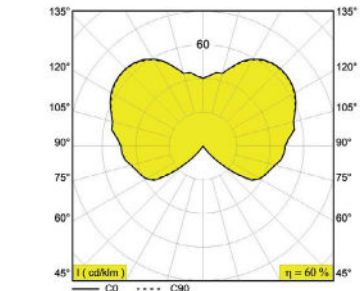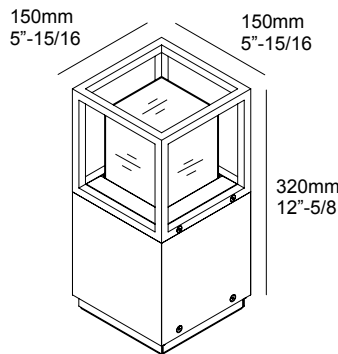

(1) Values based on 3000K standard finish

## Application

For indoor and outdoor use  
Floor surface mounted.

## Color Finish

B - Black

A - Alu Grey

## Light Source

One Max. 6,3W LED included

## Delivered Lumens

485lm at 3000K<sup>(1)</sup> at 350mA

## Power Supply

Electronic power supply included.  
120V input, 350mA current controlled

## Specification features

Housing fabricated of powder coated steel, powder coated steel trim  
Pre-installed springs for easy installation  
Suitable for dry, damp and wet location  
Dust-tight - Protected against waterjets → IP55  
Weight: 7,3lbs 3,31kg

## Dimensions

Height: 320mm = 12"-5/8  
Length: 150mm = 5"-15/16  
Width: 150mm = 5"-15/16

## PROJECT INFO

Date

Client

Project Name

Type/Quantity

Conforms to ANSI/UL Std. 1598  
Cert. to CAN/CSA Std. 22.2 No. 250.0

Last Update ALLU 27/08/2018



1

IK07

CRI &gt; 80

MONTUR S P LED

3000  
K

LED 6.3W / 808lm / 350mA

670mm  
11.0  
◇ = A / BINCL. GLASS OPAL  
INCL. 1 x CABLE 3 x 18 AWG 6'  
120V / 60Hz

IP55 WET

FULL INFO TECHNICAL CHAPTER

## OPTIONS


## INSTALLATION

JUNCTION BOX  
6 216 12 00




5"-1/2 x 5"-1/2 x 6"-13/16

IP67 CONNECTOR 3P  
6 216 12 02

Ø 1"1/16 x 6"5/8

PLATE 3  
229 02 03

3"-3/8 x 3"-3/8 x 9"-11/16

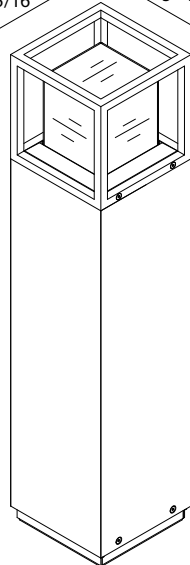150mm  
5"-15/16670mm  
26"-3/8<sup>(1)</sup> Values based on 3000K standard finish

## Application

For indoor and outdoor use  
Floor surface mounted.

## Color Finish

B - Black  
A - Alu Grey

## Light Source

One Max. 6,3W LED included

## Delivered Lumens

485lm at 3000K<sup>(1)</sup> at 350mA

## Power Supply

Electronic power supply included.  
120V input, 350mA current controlled

## Specification features

Housing fabricated of powder coated steel, powder coated steel trim  
Pre-installed springs for easy installation  
Suitable for dry, damp and wet location  
Dust-tight - Protected against waterjets → IP55  
Weight: 7,3lbs 3,31kg

## Dimensions

Height: 670mm = 26"-3/8  
Length: 150mm = 5"-15/16  
Width: 150mm = 5"-15/16

## PROJECT INFO

Date

Client

Project Name

Type/Quantity

Conforms to ANSI/UL Std. 1598  
Cert. to CAN/CSA Std. 22.2 No. 250.0

2

IK07

CRI &gt; 80

MONTUR S P LED

3000  
K

LED 6,3W / 808lm / 350mA

920mm  
6,46 232 492 83 ◇  
◇ = A / BINCL. GLASS OPAL  
INCL. 1 x CABLE 3 x 18 AWG 6'  
120V / 60Hz

IP55 WET

FULL INFO TECHNICAL CHAPTER

## OPTIONS

## INSTALLATION

JUNCTION BOX  
6 216 12 00



5"-1/2 x 5"-1/2 x 6"-13/16

IP67 CONNECTOR 3P  
6 216 12 02

Ø 1"1/16 x 6"5/8

PLATE 3  
229 02 03

3"-3/8 x 3"-3/8 x 9"-11/16



## Application

For indoor and outdoor use  
Floor surface mounted.

## Color Finish

B - Black  
A - Alu Grey

## Light Source

One Max. 6,3W LED included

## Delivered Lumens

485lm at 3000K<sup>(1)</sup> at 350mA

## Power Supply

Electronic power supply included.  
120V input, 350mA current controlled

## Specification features

Housing fabricated of powder coated steel, powder coated steel trim  
Pre-installed springs for easy installation  
Suitable for dry, damp and wet location  
Dust-tight - Protected against waterjets → IP55  
Weight: 7,3lbs 3,31kg

## Dimensions

Height: 920mm = 36"-1/4  
Length: 150mm = 5"-15/16  
Width: 150mm = 5"-15/16



## PROJECT INFO

Date

Client

Project Name

Type/Quantity
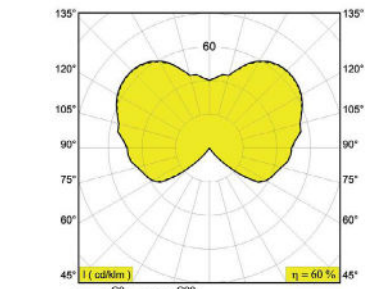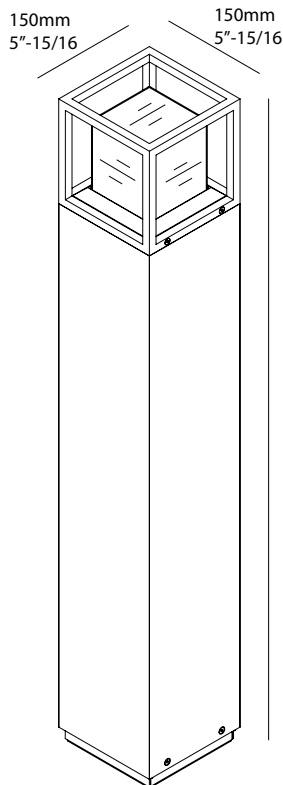
<sup>(1)</sup>Values based on 3000K standard finishConforms to ANSI/UL Std. 1598  
Cert. to CAN/CSA Std. 22.2 No. 250.0

3