



REO X

The design of this recessed fixture delivers a hardly visible transition from the intense light with the ceiling, resulting in a halo-like effect and giving the space an extra dimension.

DETAILS.

FINISHES AVAILABLE IN:

ALU GREY
BLACK
WHITE

Ø3 1/4" X 1/8" H FLANGE X 2 1/4" OAH

12W 840 LM 70 LM/W
CRI 90 2700K

REFLECTOR FL-33°

COLOR TEMPS AVAILABLE:
2700K, 3000K, 3500K

RECESSED DEPTH: 2.2"
MOUNTING SURFACE THICKNESS: 0.9" MAX
NON ADJUSTABLE.

IP44/20 – SUITABLE FOR WET LOCATIONS.
ETL LISTED

IC HOUSING/NIC PLASTERFRAMES REQ.
*DIMMABLE POWER SUPPLY AVAILABLE.

REO X



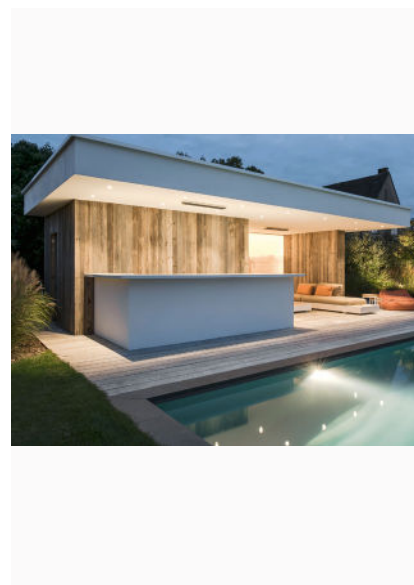
II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

REO X



II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

CRI > 90

REO X S1

3500
K

LED [H] 10.4W / 1109lm / 500mA

REFL
FL 33°6 202 25 811 952 ◇
◇ = A / B / W3000
K

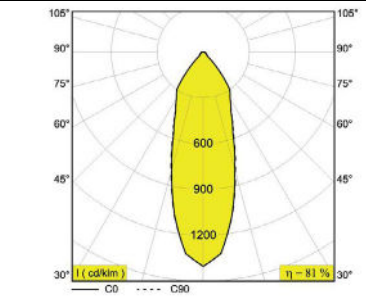
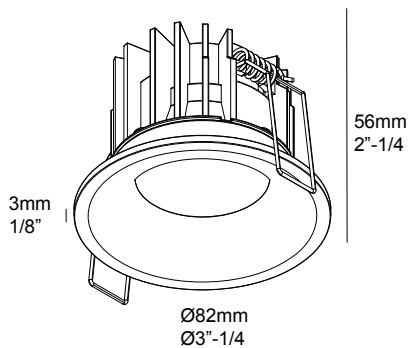
LED [H] 10.4W / 1075lm / 500mA

REFL
FL 33°6 202 25 811 932 ◇
◇ = A / B / W2700
K

LED [H] 10.4W / 1032lm / 500mA

REFL
FL 33°6 202 25 811 922 ◇
◇ = A / B / W

NON ADJUSTABLE

0.9 IP20 DAMP
IP44REQUIREMENTS
ROUGH-IN⁽¹⁾Values based on 3000K standard finish**Application**

Finishing section to be used with DELTA LIGHT rough-in housing or plasterframe.

For indoor and outdoor use

Color Finish

A - Alu Grey

W - White

B - Black

Light Source

One Max. 10,4W LED included

Delivered Lumens840lm at 2700K⁽¹⁾ at 500mA and 33°875lm at 3000K⁽¹⁾ at 500mA and 33°903lm at 3500K⁽¹⁾ at 500mA and 33°**Power Supply**

Included in rough-in or remodel option.

Specification features

Housing fabricated of powder coated steel, powder coated steel trim

Pre-installed springs for easy installation

Suitable for dry, damp and wet location

Weight: 0,9lbs 0,41kg

Dimensions

Height: 56mm = 2"-3/16

Diameter: Ø82mm = Ø3"-1/4

PROJECT INFO

Date

Client

Project Name

Type/Quantity

Conforms to ANSI/UL Std. 2108
Cert. to CAN/CSA Std. 22.2 No. 250.0

Last Update ALLU 27/08/2018



1



ROUGH-IN REQUIREMENTS

PLASTERFRAME FOR NON-IC APPLICATIONS																
						RANGE	INSTALLATION TYPE		POWER & DIMMING		VOLTAGE 1 - 120V 2 - 277V 3 - 120/277V 4 - 347V*		MOUNTING OPTION 0 - NO BAR HANGERS 1 - BAR HANGERS STANDARD			
A	B		C1		C2	D	E1 E2									
.	.	.	.	.	.	.	.	.	.	.	.	.	.	.		
A	B	C1			C2			D	E1			E2				
REO X						6	202	01	NIC PLASTERFRAME S	43	12W 500mA 1-10V DIM*	47	1	120V	1	BAR HANGERS STANDARD
										43	12W 500mA 1-10V DIM*		2	277V		
										62	12W 500mA MAINS DIM (FE)		1	120V		

**DIM10: DIMMING BY LUTRON - Hi LUME 1% ECO SYSTEM / 3-WIRE DIMMING
CONSULT FACTORY FOR OTHER DIMMING / 347V