



ULTRA 50 CEILING MOUNT

Ceiling mount fixture designed to be mounted on horizontal surfaces. It is a fixed light with no tilt, used for direct lighting. It features an extra clear, tempered, flush, low iron glass lens and high-temperature silicone gaskets. The axles and locking cylinders are machined from 316 Stainless Steel.

DETAILS.

FINISHES AVAILABLE IN:

ALUMINUM POWDERCOAT- BLACK, BRONZE, OLIVE GREEN, WHITE, WHITE BIRCH, DARK GREY, SILVER STAR, CORTEN

SIZE: 7 9/16" H X Ø5"

US ULTRA WALL PLATE: Ø8"

MAX 1400MA, CRI 80 STANDARD (90 OPTIONAL)

COLOR TEMPS AVAILABLE:

2700K, 3000K, 3000K (90 CRI), 4000K

BEAM OPTIONS:

15°, 25°, 38°, 60°

POWER OPTIONS:

SR - SERIES REMOTE

R - RETRO, 110/240V INPUT

*CONSTANT CURRENT DRIVER INCLUDED. 0-10V DIMMING.

REMOTE DRIVER WIRED IN SERIES. RETRO (110-240VAC) FIXTURES WIRED IN PARALLEL.

IP66 - RATED FOR WET LOCATIONS.

*OTHER ACCESSORIES AVAILABLE.


UL LISTED

Ceiling Mount ULTRA 50

SPECIFICATIONS



| | |
|----------------------------|--|
| LED Chip | Cree CXA 2540 field replaceable LED board |
| Luminaire Output | 5000 Lumens minimum @ 1400mA (52 watts), delivered from the Luminaire with unobstructed beam |
| Lumens Per Watt | 96 Lumens minimum @ 52 watts, delivered from Luminaire with unobstructed beam |
| CRI (3000K) | 80 Standard, 90+ Optional |
| Colour Temperatures | 2700K, 3000K, 4000K |
| Beam Angles | 13, 22, 33, 51 |
| Ingress Protection | IP66 |
| Warranty | Electronics = 5 years Body Aluminium = 5 years |
| Standards | BS/EN 60598.2.2 cUL 1598 CE |

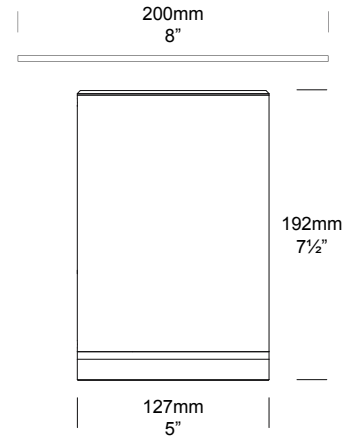

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. CM/U50

| Luminaire | Power | Material/ Finish | Beam | Colour | Accessories |
|---|----------------------|---|---|--|---|
| <input type="text" value="CM/U50"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> |
| SR SERIES REMOTE R RETRO, 120-277vac INPUT <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> SERIES REMOTE: Constant current driver (included) individual fixtures require 37vdc @1400mA maximum. 0-10 volt dimming. RETRO 110-277vac DRIVER: Constant current driver (included). Input: 120, 240, 277 volts Output: 60 watts total 37vdc @ 1400mA. 0-10 volt dimming. </div> | | ALUMINIUM EBK BLACK EBZ BRONZE EOGR OLIVE GREEN EWH WHITE EWB WHITE BIRCH EDG DARK GREY ESTAR SILVER STAR ECT CORTEN | 22 22° 33 33° 51 51° 13 13° Requires Lens Ring extension | 2 2700K 3 3000K 4 4000K 39 3000K, 90+ CRI | CJK CABLE JOINT KIT GG/U50 GLARE GUARD GS05 GLARE SHIELD HCL/U50 HEX CELL LOUVRE LF FROSTED LENS SNT/U50 SNOOT WP/U50 WALL PLATE |

ADDITIONAL COMMENTS:

LUMINAIRE CONSTRUCTION

CNC machined from one of the following metals:

Aluminium:

Body: 127mm (5") high corrosion resistant aluminium tube with chromate substrate and high UV resistant polyester powder coat.
Colours: Black, Bronze, Silver Star, White, White Birch, Olive Green, Dark Grey, Corten.

Mounting:

The mounting plate is fixed to the surface using three stainless steel screws. The luminaire is then fixed to the mounting plate. A large Wall Plate is available for mounting over junction boxes.

Luminaire Weight:
5kg (11lb)

Cable:

Water resistant rubber.


Gaskets:

Silicone, iron impregnated 220°C (428°F).

Step Lens:

12mm (1/2") extra clear, low iron, shatter resistant glass.
Lifetime warranty.


ACCESSORIES




Glare Guard




Glare Shield



Hex Cell Louvre



Snoot




Wall Plate
200mm (8")


BEAM ANGLES

High efficiency Reflectors. Field replaceable


IES files available for download: <http://www.hunzalighting.com/download.php>

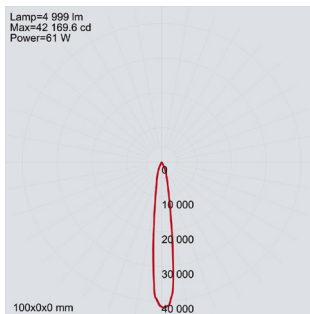


13° FWHM REFLECTOR



22° FWHM REFLECTOR





33° FWHM REFLECTOR



51° FWHM REFLECTOR

WIRING GUIDE

Available for download: www.hunzalighting.com/download.php

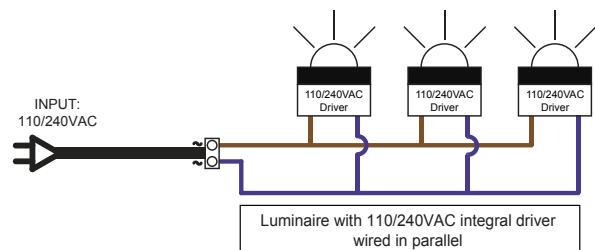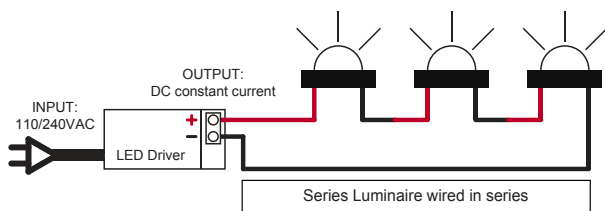


Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

FINISHES

Powdercoated Aluminium



Solid Metals

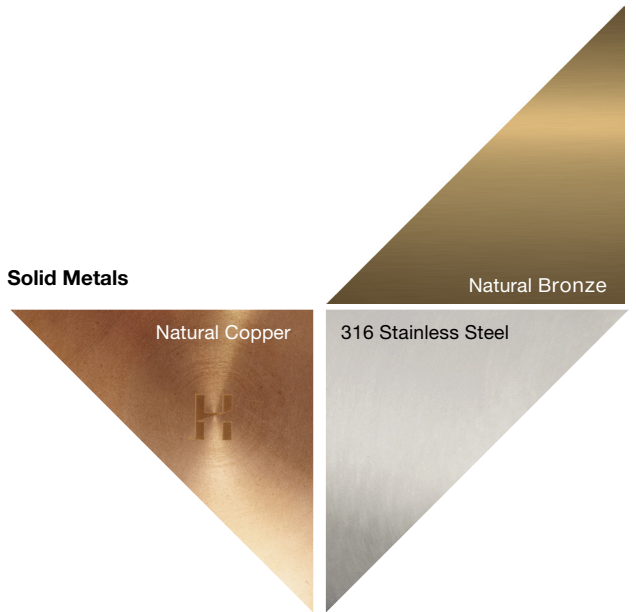

- Due to the limitation of print and screen resolution these colours should be used as a general guide only
- Solid copper and bronze are natural finishes designed to gradually weather & patina
- Solid stainless steel may acquire a surface tarnish in certain environments. Regular washing is recommended to avoid this.