



AUSTERE SOLTAIRE

Suspended fixture made from lacquered brass with a small and simple lamp for false or concrete ceilings. Fixed rod and rod with power cord, please confirm.

Also available as table, ceiling, wall and floor lamp.

Configurations of 3 to 7 available, please call showroom for more info.

Design by: Hans Verstuylft

DETAILS.

FINISHES AVAILABLE IN:

BLACK

POLYVARNISHED BRASS

WHITE

GUNMETAL

POWER CORD AVAILABLE IN: BLACK -OR- WHITE

SHADE: Ø1.6" X 2" H

STANDARD ROSE: Ø2.4" (DOES NOT COVER US J-BOX.)

US SCREWED ROSE: Ø4.5"

FIXED ROD: MAX 38.9" H


POWER CORD: MIN 39.4" - MAX 236.2" WITH LONG ROD 29.5" H

1 X 6.2W LED (INCLUDED), 2700K 600 LM


110V 93 CRI / 350MA, IP50


*1-10V DIMMABLE DRIVER AVAILABLE.

AUSTERE SOLTAIRE

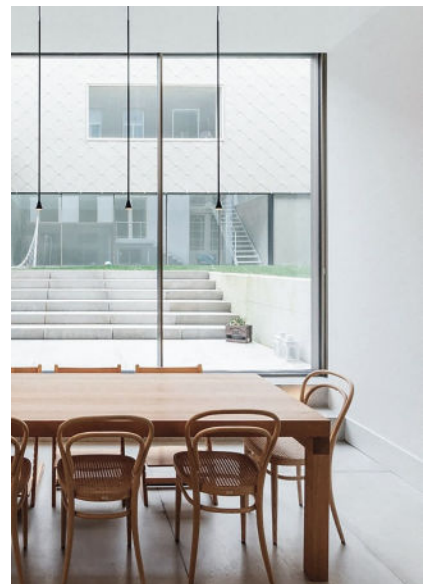


AUSTERE SOLTAIRE

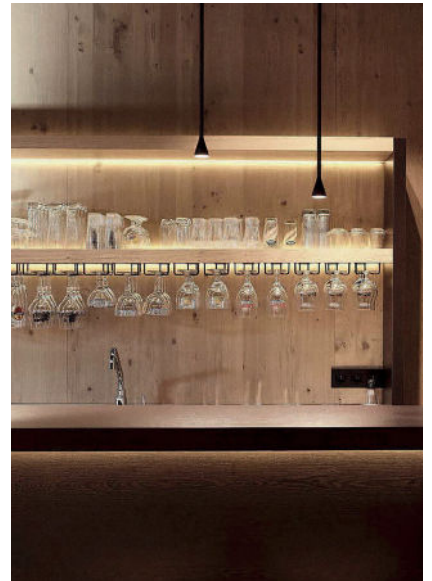

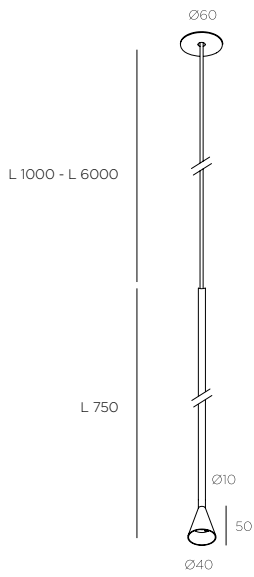

AUSTERE-Solitaire RL

Design by Hans Verstuyft

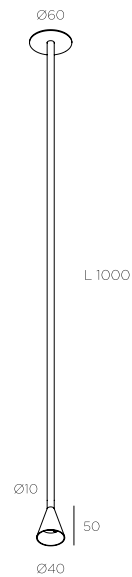

AUSTERE-Solitaire RF

Design by Hans Verstuyft

Material

brass

Finish

black - brass - white - gunmetal

Lightsource

1 x LED array (included) 6,2W
warm white : 2700K - 600lm - CRI >90

Connection

350mA - driver excluded

Specifications

indoor
ceiling mounting
class III
IP40

Material

brass

Finish

black - brass - white - gunmetal

Lightsource

1 x LED array (included) 6,2W
warm white : 2700K - 600lm - CRI >90

Connection

350mA - driver excluded

Specifications



indoor
ceiling mounting
class III
IP40



Austere-Solitaire RF D+B

Austere-Solitaire RL D+B

design by Hans Verstuyft

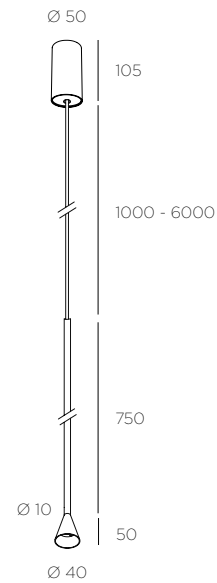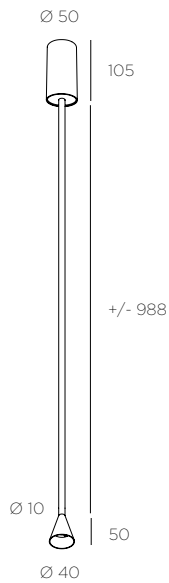

Material

brass

Finish

black / brass / white / gunmetal

Lightsource

1 x LED array (included) 6.2W

warm white : 2700K - 600lm - CRI >93

Connection

110V - 230V (driver included in base)

non dimmable or TRIAC/IGBT dimmable

Specifications

class I

IP40

Typology

ceiling mounting - indoor

Certificates

CE 

Material

brass

Finish

black / brass / white / gunmetal

Lightsource

1 x LED array (included) 6.2W

warm white : 2700K - 600lm - CRI >93

Connection

110V - 230V (driver included in base)

non dimmable or TRIAC/IGBT dimmable

Specifications

class I

IP40

Typology

ceiling mounting - indoor

Certificates

CE 