



CATHODE

This fixture evokes the shape of a bulb which diffuses soft light featuring metal and glass. Available in 2 application types. Cathode 2, installation on plasterboard with flat rose and magnetic fixing – compulsory installation kit required.

Design by: Omar Carraglia, 2015

DETAILS.

FINISHES AVAILABLE IN:

MATT WHITE/WHITE CABLE/WHITE CEILING ROSE
BRUSHED BRASS/BLACK CABLE/BLACK CEILING ROSE

SHADE SIZE: Ø8.6" X 12.6" H
118" OAH

CATHODE 1:



CANOPY: Ø5.3" X 1.6" H
120V - 5.6W LED 3000K 284 LM
*AVAILABLE IN 2700K.

**STANDARD NOT DIMMABLE; DIMMABLE VERSION AVAILABLE.

CATHODE 2:

COVERPLATE: 5.1" W X 5.1" D X 0.27" H
MAX 350MA DC - 4W LED 3000K 284 LM
*AVAILABLE IN 2700K.
NOT DIMMABLE

CATHODE

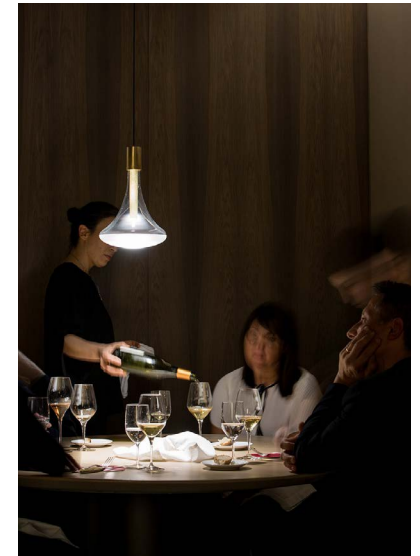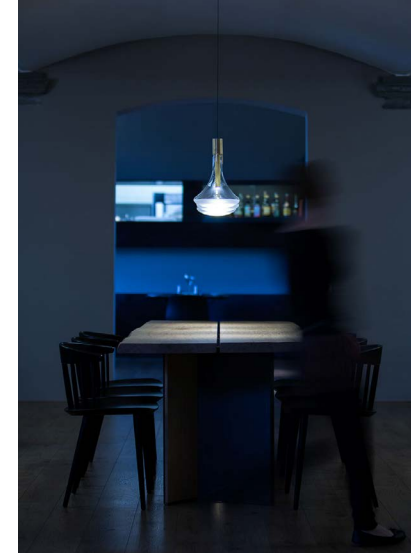






II PL

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

CATHODE

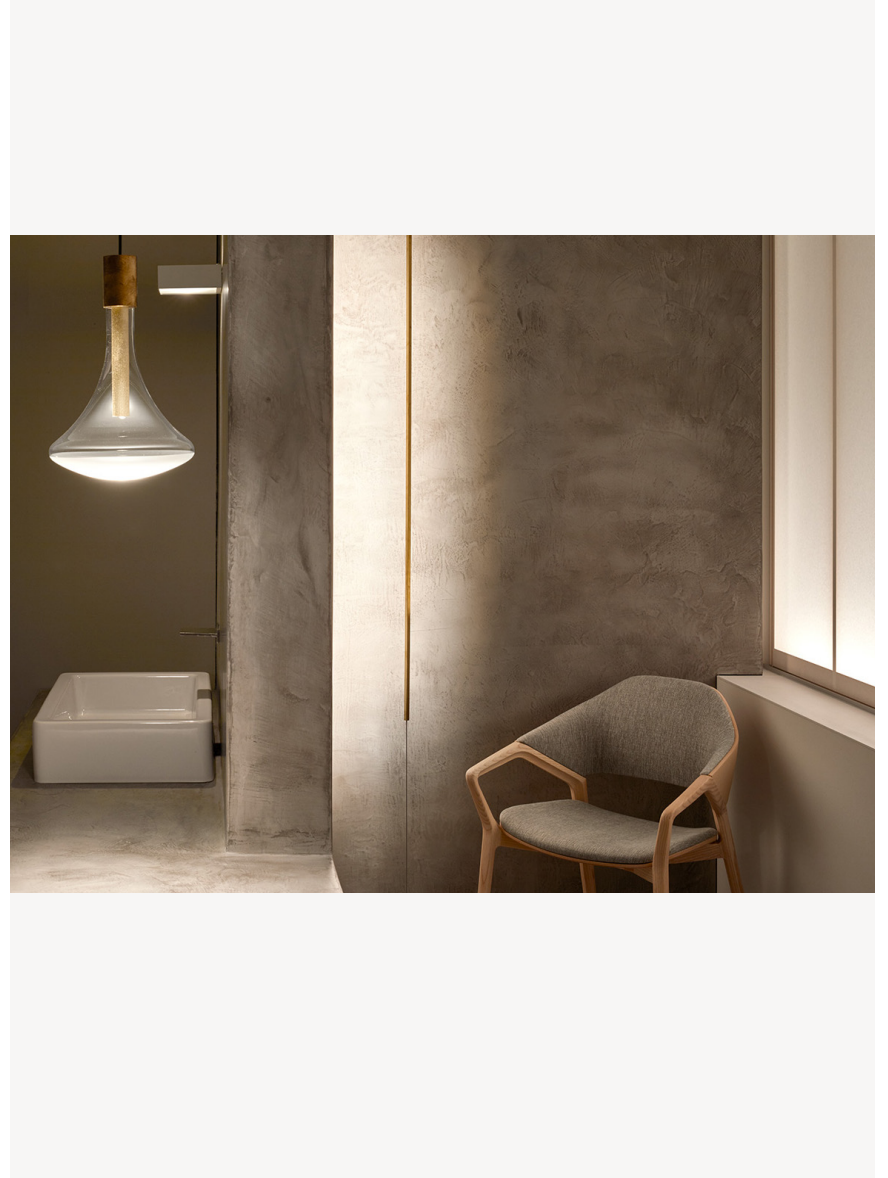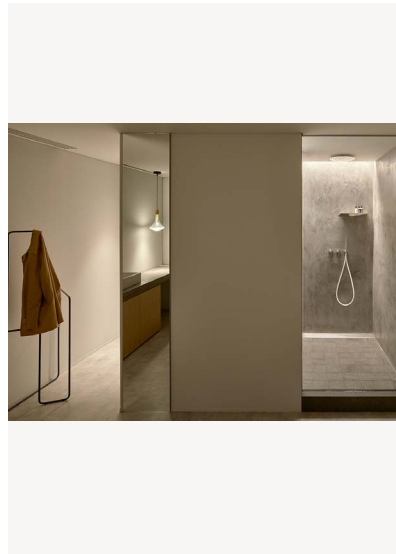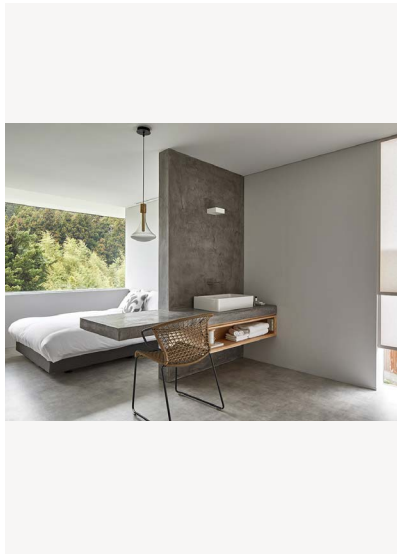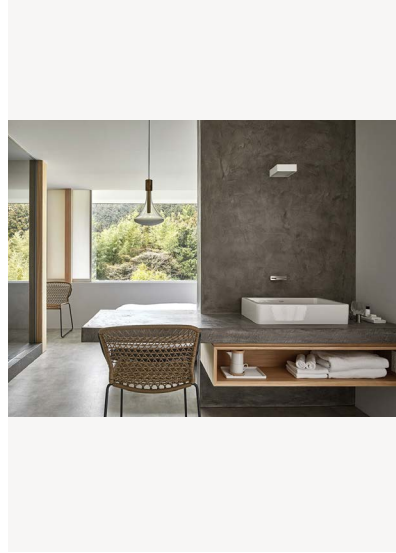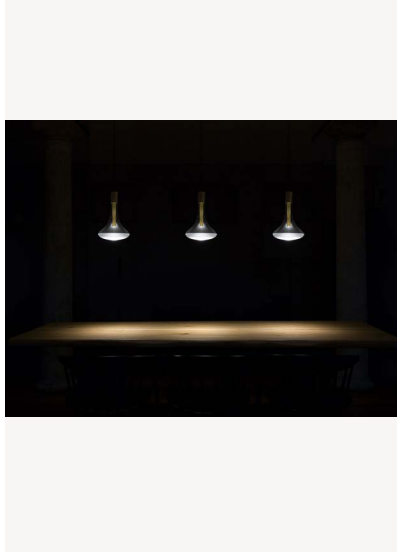

II PL

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

CATHODE




The sizes are expressed in millimeters / inches.

DESIGN OMAR CARRAGLIA - 2015
SUSPENSION LAMP - METAL - BLOWN GLASS

CATHODE 1

IE ENDLESS SYSTEM VERSION AVAILABLE

CEILING ROSE



1A2980303.27.00	MATT WHITE - 2700K - ON/OFF	120 V - 60 Hz - 5,6 W LED 2700K - 264 lm - CRI > 90 / 3000K - 284 lm - CRI > 90
1A2980303.30.00	MATT WHITE - 3000K - ON/OFF	WHITE CEILING ROSE - WHITE CABLE
1A2980803.27.00	BRUSHED BRASS - 2700K - ON/OFF	120 V - 60 Hz - 5,6 W LED 2700K - 264 lm - CRI > 90 / 3000K - 284 lm - CRI > 90
1A2980803.30.00	BRUSHED BRASS - 3000K - ON/OFF	BLACK CEILING ROSE - BLACK CABLE


IIPL

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

CATHODE



DIMMABLE VERSIONS

1A2980303.27.01	MATT WHITE - 2700K - DALI	120 V - 60 Hz - 5.6 W LED
1A2980303.30.01	MATT WHITE - 3000K - DALI	2700K - 264 lm - CRI > 90 / 3000K - 284 lm - CRI > 90
1A2980303.27.03	MATT WHITE - 2700K - 1-10 V	WHITE CEILING ROSE - WHITE CABLE
1A2980303.30.03	MATT WHITE - 3000K - 1-10 V	
1A2980303.27.04	MATT WHITE - 2700K - PUSH	
1A2980303.30.04	MATT WHITE - 3000K - PUSH	
1A2980803.27.01	BRUSHED BRASS - 2700K - DALI	120 V - 60 Hz - 5.6 W LED
1A2980803.30.01	BRUSHED BRASS - 3000K - DALI	2700K - 264 lm - CRI > 90 / 3000K - 284 lm - CRI > 90
1A2980803.27.03	BRUSHED BRASS - 2700K - 1-10 V	BLACK CEILING ROSE - BLACK CABLE
1A2980803.30.03	BRUSHED BRASS - 3000K - 1-10 V	
1A2980803.27.04	BRUSHED BRASS - 2700K - PUSH	
1A2980803.30.04	BRUSHED BRASS - 3000K - PUSH	

CATHODE 1

II PL

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

CATHODE




The sizes are expressed in millimeters / inches.

DESIGN OMAR CARRAGLIA - 2015
SUSPENSION LAMP - METAL - BLOWN GLASS

CATHODE 2

CEILING ROSE



1A2990303.27.00	MATT WHITE - 2700K - ON/OFF	MAX 350 mA DC - 4 W LED 2700K - 264 lm - CRI > 90 / 3000K - 284 lm - CRI > 90
1A2990303.30.00	MATT WHITE - 3000K - ON/OFF	WHITE CEILING ROSE - WHITE CABLE
		INSTALLATION ON PLASTERBOARD WITH FLAT ROSE AND MAGNETIC FIXING
		COMPULSORY INSTALLATION KIT INCLUDED
		PLASTERBOARD CUT-OUT 85 x 97 mm / 3.34" x 3.81" - MINIMUM SPACE FOR MOUNTING 120 mm / 4.72"
		INCLUDES INDEPENDENT DRIVER INPUT 100-240 V - 50/60 Hz
1A2990803.27.00	BRUSHED BRASS - 2700K - ON/OFF	MAX 350 mA DC - 4 W LED 2700K - 264 lm - CRI > 90 / 3000K - 284 lm - CRI > 90
1A2990803.30.00	BRUSHED BRASS - 3000K - ON/OFF	BLACK CEILING ROSE - BLACK CABLE
		INSTALLATION ON PLASTERBOARD WITH FLAT ROSE AND MAGNETIC FIXING
		COMPULSORY INSTALLATION KIT INCLUDED
		PLASTERBOARD CUT-OUT 85 x 97 mm / 3.34" x 3.81" - MINIMUM SPACE FOR MOUNTING 120 mm / 4.72"
		INCLUDES INDEPENDENT DRIVER INPUT 100-240 V - 50/60 Hz