



PALLA

Mouth-blown opal glass luminaire that offers a luminous focal point to any space. Combined with an oak ring base, Palla is also available as a table or floor luminaire.

Configurable variants available - Single, Duo, Trio or Rain. Remote driver or driver in base available. Available in two sizes - Palla 16 (6.3") or Palla 21 (8.3").

DETAILS.

METAL FINISHES: ALUMINUM POLISHED OR BLACK

CABLE FINISHES: GREY OR BLACK

PALLA 16: Ø6.3"

11W 600LM

PALLA 21: Ø8.3"

16W, 890LM

120V 2700K CRI 90

DIMMING STANDARD: PHASE-CUT

1-10V DIMMABLE

***DIMMING ALSO AVAILABLE VIA BLUETOOTH (CASAMBI).**

PALLA



II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

PALLA





II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

PALLA SUSPENSION UP ROUND 16 16 alu pol/grey
CPA05-0




PALLA SUSPENSION UP ROUND 16 16 black/black
CPA05-1



TECHNICAL SPECIFICATIONS

Lamp holder	LED
Mounting method	ceiling-mounted (surface)
warmDIM	Yes
Light emission	direct
Light distribution	symmetric
Luminaire luminous flux	600 lm
Colour temperature	2700-2200 K
Colour rendering index (CRI)	> 90
Rated voltage (range)	220-240 V / 120 V
Power frequency	50/60 Hz
Power consumption (maximum)	11 W
Surface	polished or powdercoat black
Housing material	aluminium, opaline glass
Type of lamp control gear	Driver
Ballast included	Yes
Protection class	I
Connection cable (number of cores)	3
Number of lampheads	1
Energy efficiency	A - A++
Dimmable	Yes
Type of Dimmer	Phase cutting (electronic)
Diameter	160 mm
Head adjustable	No
Height adjustable	No
Suspension length	-/3000 mm
Custom length	Yes

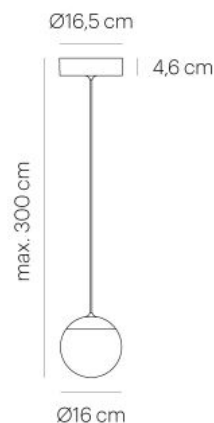


PALLA SUSPENSION IN 16 alu pol/grey
CPA01-0

PALLA SUSPENSION IN 16 black/black
CPA01-1



TECHNICAL SPECIFICATIONS

Lamp holder	LED
Mounting method	ceiling-mounted (recessed)
warmDIM	Yes
Light emission	direct
Light distribution	symmetric
Luminaire luminous flux	600 lm
Colour temperature	2700-2200 K
Colour rendering index (CRI)	> 90
Rated voltage (range)	220-240 V / 120 V
Power frequency	50/60 Hz
Power consumption (maximum)	11 W
Surface	polished or powdercoat black
Housing material	aluminium, opaline glass
Type of lamp control gear	Driver
Ballast included	Yes
Protection class	II
Connection cable (number of cores)	3
Number of lampheads	1
Energy efficiency	A - A++
Dimmable	Yes
Type of Dimmer	phase rotary dimmer
Diameter	160 mm
Head adjustable	No
Mounting depth	60 mm
Height adjustable	No
Mounting diameter	68 mm
Suspension length	-/3000 mm
Custom length	Yes

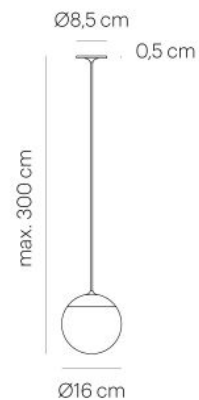

PALLA SUSPENSION DUO 17x17 16 alu pol/grey
CPA02-0




PALLA SUSPENSION DUO 17x17 16 black/black
CPA02-1



TECHNICAL SPECIFICATIONS

Lamp holder	LED
Mounting method	ceiling-mounted (surface)
warmDIM	Yes
Light emission	direct
Light distribution	symmetric
Luminaire luminous flux	2x 600 lm
Colour temperature	2700-2200 K
Colour rendering index (CRI)	> 90
Rated voltage (range)	220-240 V / 120 V
Power frequency	50/60 Hz
Power consumption (maximum)	2x 11 W
Surface	polished or powdercoat black
Housing material	aluminium, opaline glass
Type of lamp control gear	Driver
Ballast included	Yes
Protection class	I
Connection cable (number of cores)	3
Number of lampheads	2
Energy efficiency	A - A++
Dimmable	Yes
Type of Dimmer	phase rotary dimmer
Diameter	160 mm
Head adjustable	No
Height adjustable	No
Suspension length	-/3000 mm
Custom length	Yes

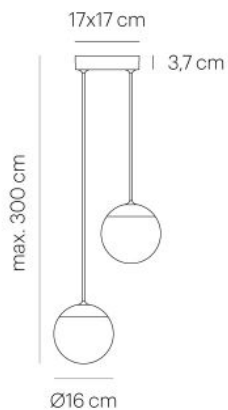

PALLA RAIN TRIO 30 16 alu pol/grey
CPA03-0



PALLA RAIN TRIO 30 16 black/black
CPA03-1



PALLA RAIN TRIO 30 16 alu pol/olive-sand-maroon
CPA03-8



TECHNICAL SPECIFICATIONS

Lamp holder	LED
Mounting method	ceiling-mounted (surface)
warmDIM	Yes
Light emission	direct
Light distribution	symmetric
Luminaire luminous flux	3x 600 lm
Colour temperature	2700-2200 K
Colour rendering index (CRI)	> 90
Rated voltage (range)	220-240 V / 120 V
Power frequency	50/60 Hz
Power consumption (maximum)	3x 11 W
Surface	polished or powdercoat
Housing material	aluminium, opaline glass
Type of lamp control gear	Driver
Ballast included	Yes
Protection class	I
Connection cable (number of cores)	3
Number of lampheads	3
Energy efficiency	A - A++
Dimmable	Yes
Type of Dimmer	phase rotary dimmer
Diameter	160 mm
Head adjustable	No
Height adjustable	No
Suspension length	-/3000 mm
Custom length	Yes

