

Cylindrical fixture that is mounted on a minimal backplate. The cylinder also hides the light source to achieve a dark light effect with a standard or retrofit lamp. Its elegant suspension makes the luminaire more of an object. Patinated brass has a timeless aspect, it shows the material in its depth which can not be obtained with coated materials. Custom double shade available upon request.

Design by: Hans Verstuyft

DETAILS. FINISHES AVAILABLE IN: N-BRASS BRUSHED NATURAL P-BRASS BRUSHED PATINE G-BRASS BRUSHED GUNMETAL BRONZE * FOR POWDERCOATED (RAL COLOR) FINISHES, MINIMUM OF FIVE (5) QUANTITY REQUIRED. PLEASE CALL SHOWROOM FOR PRICING.

SHADE SIZE: Ø2.3" X 5" H ROD LENGTH: 3" STANDARD ROSE; Ø2.3" (DOES NOT COVER US J-BOX.) US SCREWED ROSE: Ø4 ¼" *CUSTOM LENGTHS AVAILABLE UP TO 39" (1M).

GU5,3: MAX 50W 12V, IP20 – UL SOCKET *TRANSFORMER REQUIRED.

GU10: MAX 50W 110-240V, IP20 (OPTIONAL: RETROFIT 5W LED SPOT 120V)

II P L

PLUGLIGHTING.COM INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE STE 108 LOS ANGELES 90038



II P L

PLUGLIGHTING.COM INFO@PLUGLIGHTING.COM 5665 MELROSE AVENUE STE 108 LOS ANGELES 90038















PLUGLIGHTING.COM INFO@PLUGLIGHTING.COM 5665 MELROSE AVENUE STE 108 LOS ANGELES 90038













II P L


PLUGLIGHTING.COM INFO@PLUGLIGHTING.COM 5665 MELROSE AVENUE STE 108 LOS ANGELES 90038

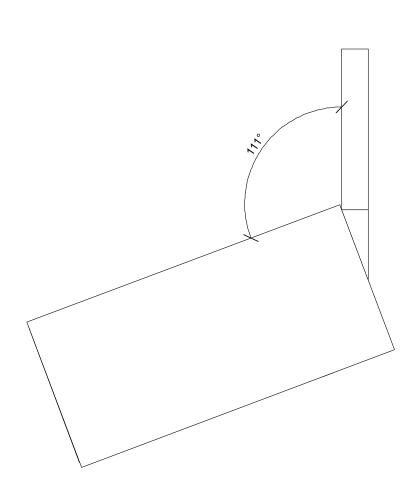


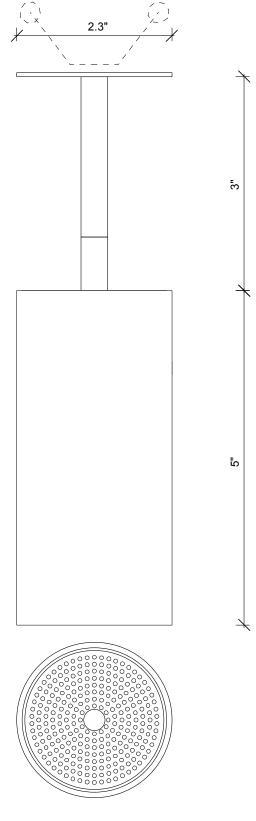

II P L


PLUGLIGHTING.COM INFO@PLUGLIGHTING.COM 5665 MELROSE AVENUE STE 108 LOS ANGELES 90038

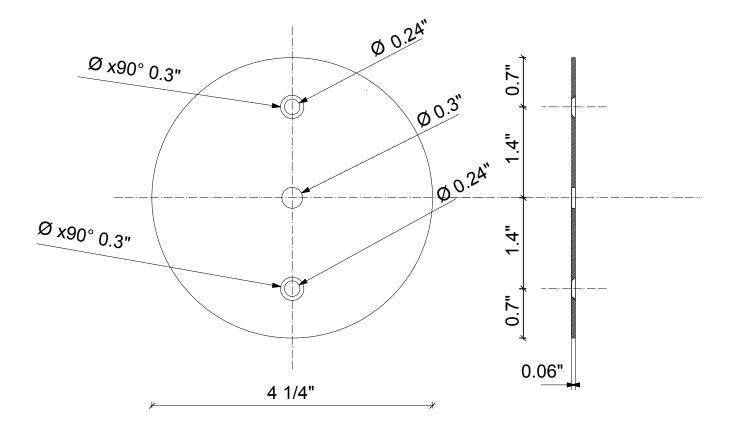

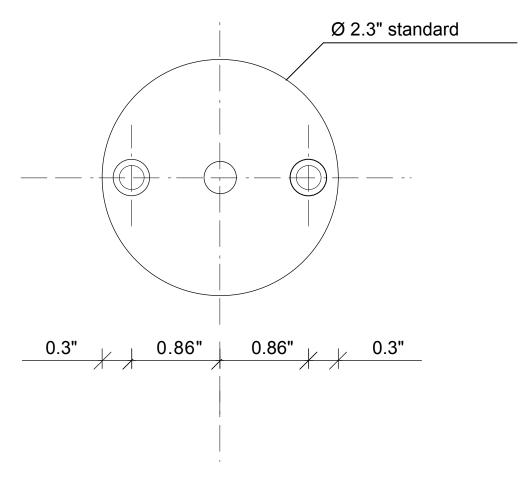

P. 323 467 5635 F. 323 467 5634

6

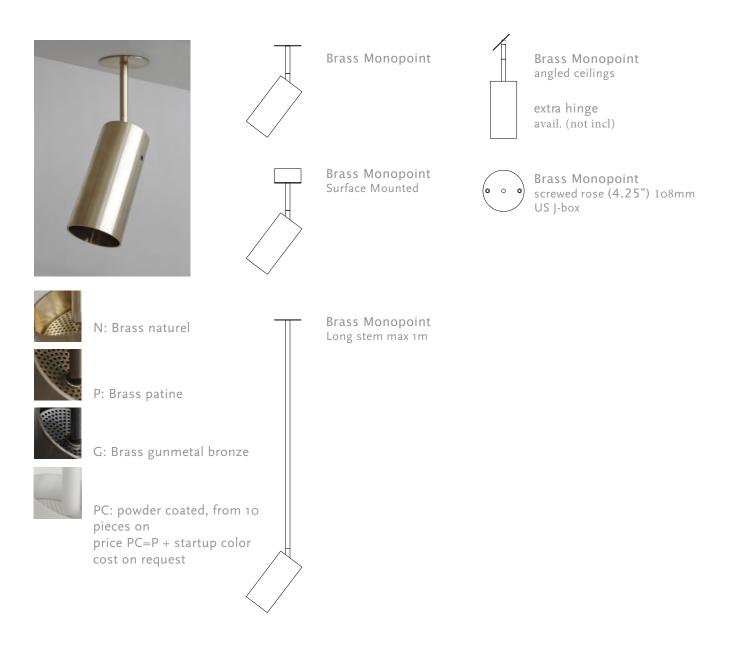



GU5,3 / 12V max. 50W IP20 - CE socket UL



GU10 / 110-240V max. 50W IP20 - CE



PLUGLIGHTING.COM INFO@PLUGLIGHTING.COM 5665 MELROSE AVENUE STE 108 LOS ANGELES 90038