

## PALLA 16

Mouth-blown opal glass luminaire that offers a luminous focal point to any space. Combined with an oak ring base, Palla is also available as a table or floor luminaire.

Palla 21 (8.3") also available, please contact showroom for more info. Remote driver (Up) or driver in base (In) available.

### DETAILS.

**METAL FINISHES: ALUMINUM POLISHED OR BLACK**

**PALLA 16: Ø6.3"**

**CANOPY: Ø4.7"**

**11W, 600LM**

**PALLA 21: Ø8.3"**

**CANOPY: Ø6.5"**

**16W, 890LM**






**120V 2700K CRI 90**

**DIMMING STANDARD: PHASE-CUT**

**1-10V DIMMABLE**

**\*DIMMING ALSO AVAILABLE VIA BLUETOOTH (CASAMBI).**

PALLA 16

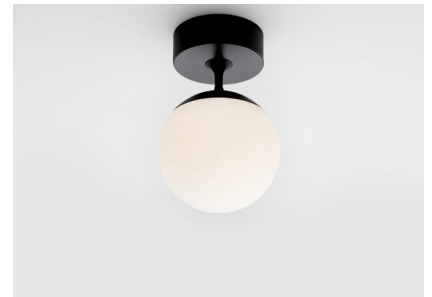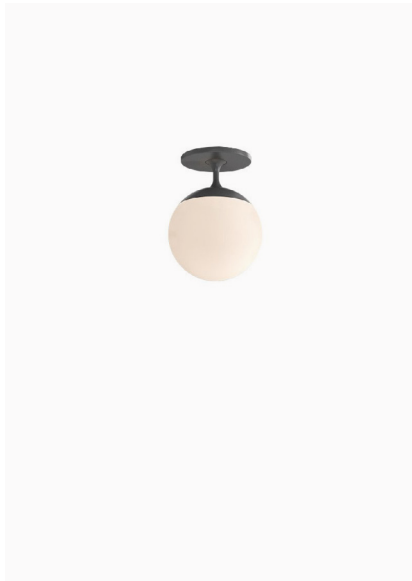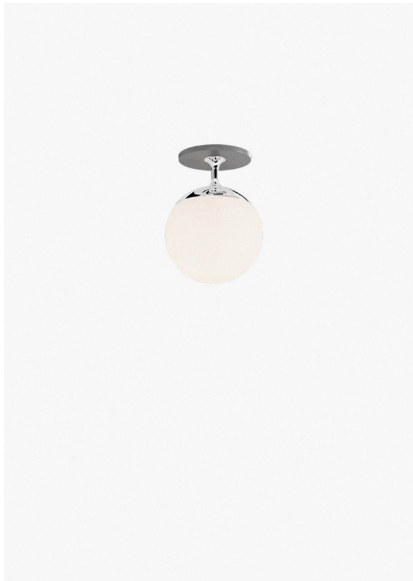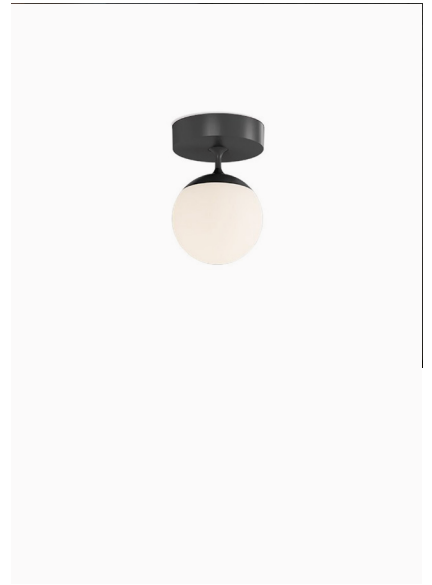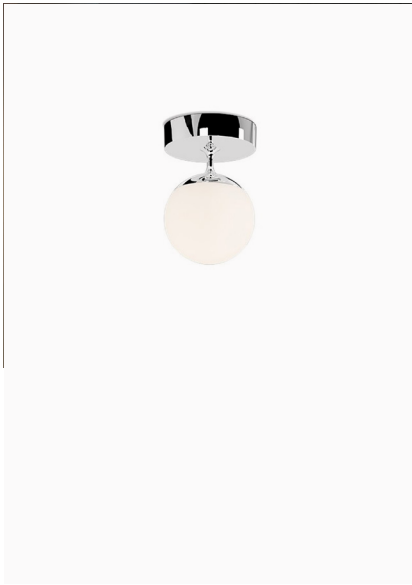

**PALLA CEILING UP ROUND 16 16 alu pol**  
CPA25-0



**PALLA CEILING UP ROUND 16 16 black**  
CPA25-1



**TECHNICAL SPECIFICATIONS**

Lamp holder	LED
Mounting method	ceiling-mounted (surface)
warmDIM	Yes
Light emission	direct
Light distribution	symmetric
Luminaire luminous flux	600 lm
Colour temperature	2700-2200 K
Colour rendering index (CRI)	> 90
White impression	Warm White
Rated voltage (range)	220-240 V / 120 V
Power frequency	50/60 Hz
Power consumption (maximum)	11 W
Surface	polished or powder-coated
Housing material	aluminium, opaline glass
Type of lamp control gear	Driver
Ballast included	Yes
Protection class	I
Connection cable (number of cores)	3
Number of lampheads	1
Energy efficiency	A - A++
Dimmable	Yes
Type of Dimmer	phase rotary dimmer
Height	254 mm
Diameter	160 mm
Outer diameter	600 mm
Head adjustable	No
Mounting depth	60 mm
Mounting diameter	68 mm
Net weight	kg



**PALLA CEILING IN 16 alu pol**  
CPA21-0



**PALLA CEILING IN 16 black**  
CPA21-1



**TECHNICAL SPECIFICATIONS**

Lamp holder	LED
Mounting method	ceiling-mounted (recessed)
warmDIM	Yes
Light emission	direct
Light distribution	symmetric
Luminaire luminous flux	600 lm
Colour temperature	2700-2200 K
Colour rendering index (CRI)	> 90
White impression	Warm White
Rated voltage (range)	220-240 V / 120 V
Power frequency	50/60 Hz
Power consumption (maximum)	11 W
Surface	polished or powder-coated
Housing material	aluminium, opaline glass
Type of lamp control gear	Driver
Ballast included	Yes
Connection cable (number of cores)	3
Number of lampheads	1
Energy efficiency	A - A++
Dimmable	Yes
Type of Dimmer	Phase cutting (electronic)
Height	244 mm
Diameter	160 mm
Head adjustable	No
Mounting depth	60 mm
Mounting diameter	68 mm
Net weight	kg

