



MAGGY 36

Linear profile system allows trimless installation of 1.4" (36mm) width that can be equipped with various light modules fastened to the structure via magnets - linear (Ben), fixed (David), adjustable (Leonard), spotlight (Prince).

Design by: Lapo Grassellini

DETAILS.

PROFILE OPENING: 1.2"; 1.7" FLANGE
HOUSING SIZE: 5.3" W X 3.5" H

BEN 36: 19.7" L
15W LED, 24V DC, 95 CRI
*PARALLEL WIRING

DAVID 36: 4.7" W
10W LED 500MA, 98 CRI
*SERIES WIRING

LEONARD 36: 4.2" W X 1" SHADE
360° ROTATION W/ 45° VERTICAL ADJUSTABILITY.
10W LED 500MA, 98 CRI
*SERIES WIRING

PRINCE 36: 4.2" W
SHADE: 1.9" X 2.8" H
360° ROTATION W/ 75° VERTICAL ADJUSTABILITY.
10W LED 500MA, 98 CRI
*SERIES WIRING



COLOR TEMPERATURES:
2700K, 3000K, 3500K, 4000K

BEAM ANGLES: (DAVID, LEONARD, PRINCE)
25°, 45°, 20+55°, 60° (PRINCE ONLY)


DIMMING OPTIONS:
0-10V, PHASE, LUTRON 2-WIRE PHASE, OR LUTRON
ECOSYSTEM

IP20 - FOR INTERIOR USE ONLY.
ETL LISTED

MAGGY 36

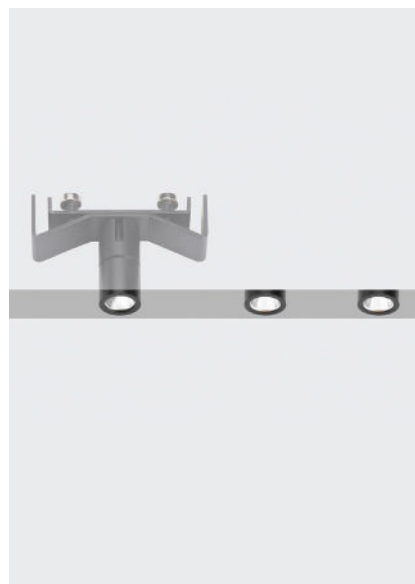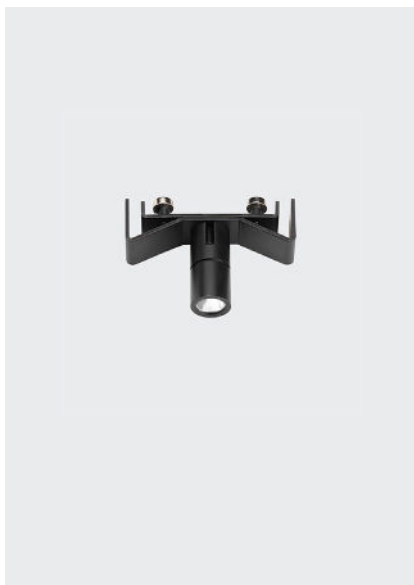


MAGGY 36

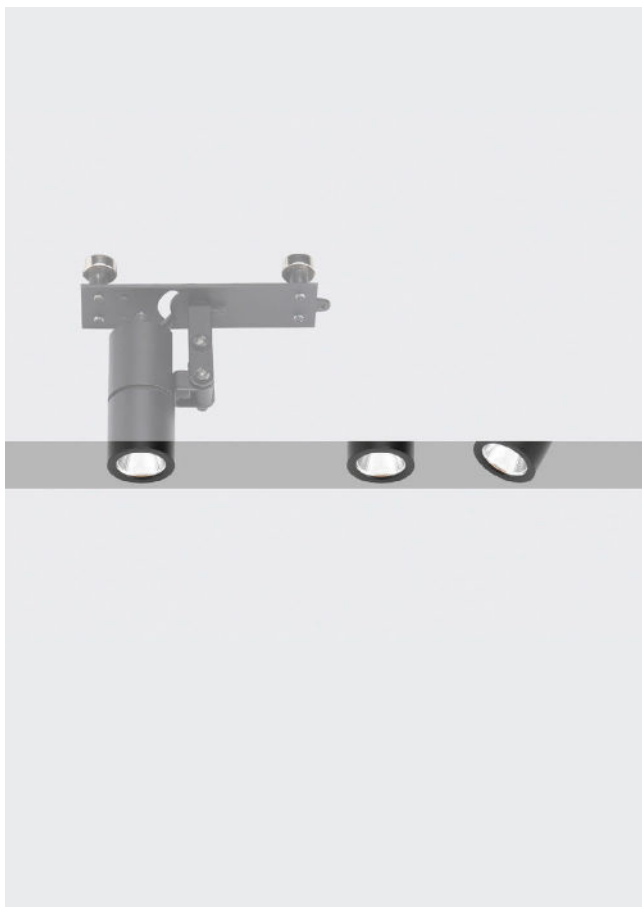

MAGGY 36

design: Lapo Grassellini

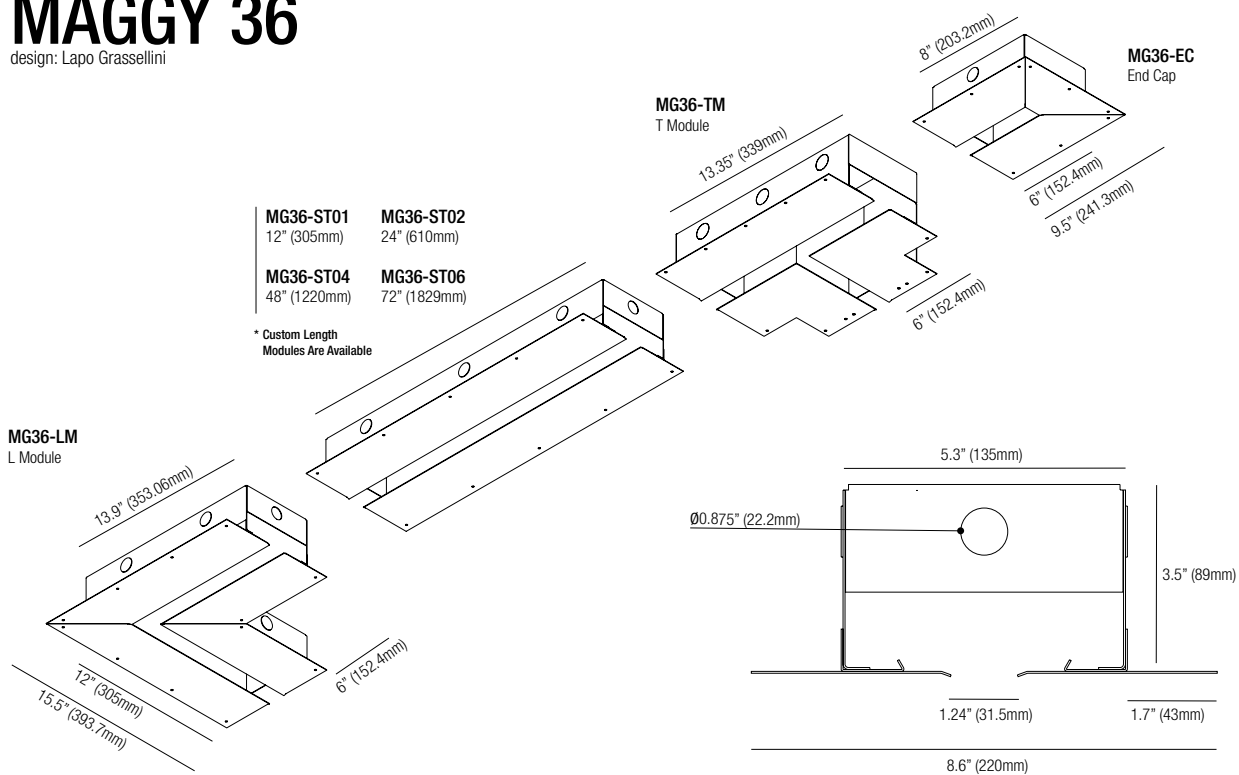



DAVID 36

design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 18V)


Power
Puissance
Potencia
10W

120mm (4.72")




Photometric diagrams


F002



F407



A113



CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+
† Dim Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

DA36,XX,9,X

DA36

XX

Color Temp.

Température couleur
Temperatura de color

9

X

Beam angle

Angle de faisceau
Ángulo del haz

27

2700K

30

3000K

35

3500K

40

4000K

DW

Dim Warm
† @ 420mA

S

25°

M

45°

D

20+55°

Optionals - Accessoires - Accesorios

L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

Drivers

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



0-10V

FLEXA-60-PRO-CC-10V

Programmable 60W CC 0-10V Dimming
Dimming Range: 0.1%

Min. 1/Max. 3 Fixtures per Driver

Phase

FLEXA-12-500-CC-ELV

12W 500mA Constant Current
Dimming Range: 10%

Min. 1/Max. 1 Fixtures per Driver

FLEXA-23-500-CC-ELV

23W 500mA Constant Current
Dimming Range: 10%

Min. 2/Max. 2 Fixtures per Driver

Lutron 2-Wire Phase

LTEA.2

Hi-Lume 2-Wire Phase
500mA Constant Current
Dimming Range: 1%

Min. 1/Max. 2 Fixtures per Driver

LTEA.3

Hi-Lume 2-Wire Phase
500mA Constant Current
Dimming Range: 1%

Min. 2/Max. 3 Fixtures per Driver

Lutron Ecosystem

LDE.1


Hi-Lume Ecosystem
500mA Constant Current
Dimming Range: 1%

Min. 1/Max. 1 Fixtures per Driver

LDE.2

Hi-Lume Ecosystem Premier
500mA Constant Current
Dimming Range: 1%

Min. 2/Max. 2 Fixtures per Driver





LEONARD 36

design: Lapo Grassellini


Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 8.7V)

Power
Puissance
Potencia
4.5W




Photometric diagrams


F002



F407



A113



CCT	Flux	CRI
2700K	540 lm	98+
3000K	600 lm	98+
3500K	610 lm	98+
4000K	620 lm	98+

Code Construction

Construction du code produit
Construcción del código de producto

LN36₁XX₁9₁X₁

LN36

XX

Color Temp.

Température couleur
Temperatura de color

9

X

Beam angle

Angle de faisceau
Ángulo del haz

27 2700K

30 3000K

35 3500K

40 4000K

CU Custom

S 25°

M 45°

D 20+55°

Optionals - Accessoires - Accesorios

L001

Low luminance louvre

Filtre basse luminance
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

Drivers

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



0-10V

FLEXA-60-PRO-CC-10V

Programmable 60W CC 0-10V Dimming

Dimming Range: 0.1%

Min. 1/Max. 6 Fixtures per Driver

Phase

FLEXA-12-500-CC-ELV

12W 500mA Constant Current

Dimming Range: 10%

Min. 1/Max. 2 Fixtures per Driver

FLEXA-23-500-CC-ELV

23W 500mA Constant Current

Dimming Range: 10%

Min. 3/Max. 5 Fixtures per Driver

Lutron 2-Wire Phase

Hi-Lume 2-Wire Phase / 500mA Constant Current / Dimming Range: 1%

LTEA.1

Min. 1/Max. 2

Fixtures per Driver

LTEA.2

Min. 2/Max. 4

Fixtures per Driver

LTEA.3

Min. 4/Max. 6

Fixtures per Driver

Lutron Ecosystem

LDE.1

Hi-Lume Ecosystem

500mA Constant Current

Dimming Range: 1%

Min. 2/Max. 3 Fixtures per Driver

LDE.2

Hi-Lume Ecosystem Premier

500mA Constant Current

Dimming Range: 1%

Min. 4/Max. 5 Fixtures per Driver





PRINCE 36


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 18V)

Power
Puissance
Potencia
10W

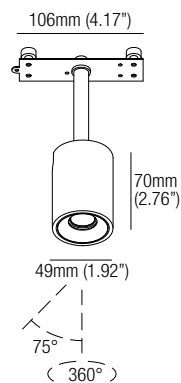

Photometric diagrams

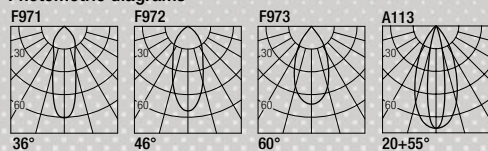

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+
† Dim Warm 1800K-3000K	725 lm	95



Code Construction

Construction du code produit
Construcción del código de producto

PR36,XX,9,X

PR36	XX	Color Temp.	9	X	Beam angle
		Température couleur Temperatura de color			Angle de faisceau Ángulo del haz
		27 2700K		S	36°
		30 3000K		M	46°
		35 3500K		W	60°
		40 4000K		D	20+55°
		DW Dim Warm † @ 420mA			

Optionals - Accessoires - Accesorios

L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

Drivers

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



0-10V

FLEXA-60-PRO-CC-10V

Programmable 60W CC 0-10V Dimming
Dimming Range: 0.1%

Min. 1/Max. 3 Fixtures per Driver

Phase

FLEXA-12-500-CC-ELV

12W 500mA Constant Current
Dimming Range: 10%

Min. 1/Max. 1 Fixtures per Driver

FLEXA-23-500-CC-ELV

23W 500mA Constant Current
Dimming Range: 10%

Min. 2/Max. 2 Fixtures per Driver

Lutron 2-Wire Phase

LTEA.2

Hi-Lume 2-Wire Phase
500mA Constant Current
Dimming Range: 1%

Min. 1/Max. 2 Fixtures per Driver

LTEA.3

Hi-Lume 2-Wire Phase
500mA Constant Current
Dimming Range: 1%

Min. 2/Max. 3 Fixtures per Driver

Lutron Ecosystem

LDE.1

Hi-Lume Ecosystem
500mA Constant Current
Dimming Range: 1%

Min. 1/Max. 1 Fixtures per Driver

LDE.2

Hi-Lume Ecosystem Premier
500mA Constant Current
Dimming Range: 1%


Min. 2/Max. 2 Fixtures per Driver

BEN 36

design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
24VDC


Power
Puissance
Potencia
15W



500mm (19.68")



Photometric diagrams



CCT	Flux	CRI
2700K	1050 lm	95+
3000K	1071 lm	95+
3500K	1093 lm	95+
4000K	1112 lm	95+



Code Construction

Construction du code produit
Construcción del código de producto

BE360 XX


BE360	XX	Color Temp.
		Température couleur Temperatura de color
		27 2700K
		30 3000K
		35 3500K
		40 4000K

Drivers

Alimentateurs
Alimentadores

Parallel wiring

Câblage en parallèle
Cableado en paralelo



0-10V

DL010-024-100VD

100W CV 0-10V Dimming

Dimming Range: 1%

Min. 1/Max. 6 Fixtures per Driver

Phase

DLELD-024-100W

96W Constant Voltage

Dimming Range: 10%

Min. 1/Max. 6 Fixtures per Driver

Lutron 2-Wire Phase

LTEA.CV.1

Hi-Lume 2-Wire Phase

40W Constant Voltage

Dimming Range: 1%

Min. 1/Max. 2 Fixtures per Driver

LTEA.CV.2

Hi-Lume 2-Wire Phase

96W Constant Voltage

Dimming Range: 1%

Min. 1/Max. 6 Fixtures per Driver

Lutron Ecosystem

LDE.CV.1

Hi-Lume Ecosystem

40W Constant Voltage

Dimming Range: 1%

Min. 1/Max. 2 Fixtures per Driver

LDE.CV.2

Hi-Lume Ecosystem

96W Constant Voltage

Dimming Range: 1%

Min. 1/Max. 6 Fixtures per Driver