



MAGGY 72

Linear profile system allows trimless installation of 2.8" (72mm) width that can be equipped with various light modules fastened to the structure via magnets - linear (Ben), fixed (David), adjustable (Leonard), spotlight (Prince).

Design by: Lapo Grassellini

DETAILS.

PROFILE OPENING: 2.8"; 1.7" FLANGE
HOUSING SIZE: 6.7" W X 4.2" H

BEN 72: 19.7" L
30W LED, 24V DC, 95 CRI
*PARALLEL WIRING

DAVID 72: 6.3" W
20W LED 500MA, 93 CRI
*SERIES WIRING

LEONARD 72: 3.9" W
360° ROTATION W/ 45° VERTICAL ADJUSTABILITY.
10W LED 500MA, 98 CRI
*SERIES WIRING

PRINCE 72: 4.2" W
SHADE: 3.5" X 4.7" H
360° ROTATION W/ 75° VERTICAL ADJUSTABILITY.
20W LED 500MA, 93 CRI
BEAM ANGLES: 23°, 35°, 52°
*SERIES WIRING




COLOR TEMPERATURES:
2700K, 3000K, 3500K, 4000K

BEAM ANGLES: (DAVID, LEONARD)
36°, 46°, 20+55° (LEONARD ONLY), 60°

DIMMING OPTIONS:
0-10V, PHASE, LUTRON 2-WIRE PHASE, OR LUTRON
ECOSYSTEM

IP20 - FOR INTERIOR USE ONLY.
ETL LISTED

MAGGY 72

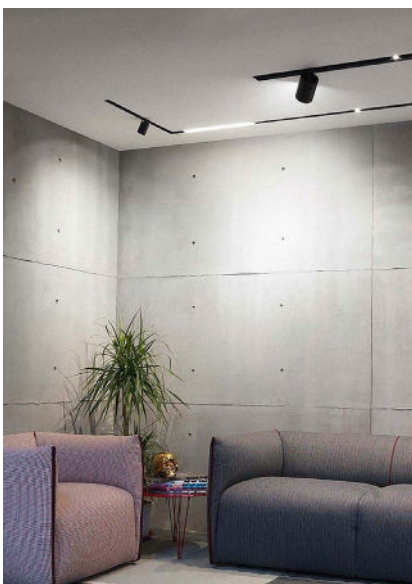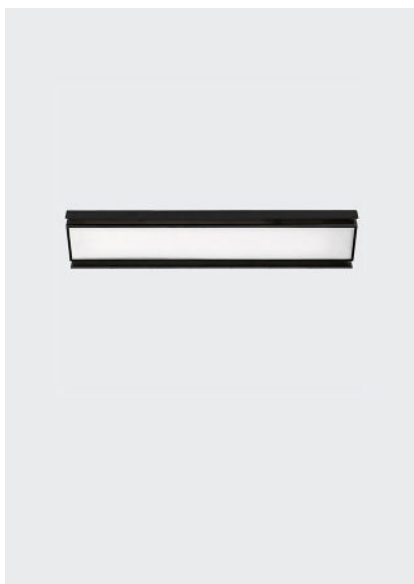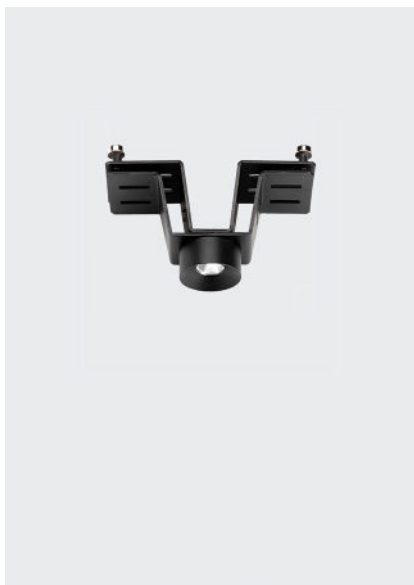

II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634



II P L


PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

MAGGY 72

design: Lapo Grassellini

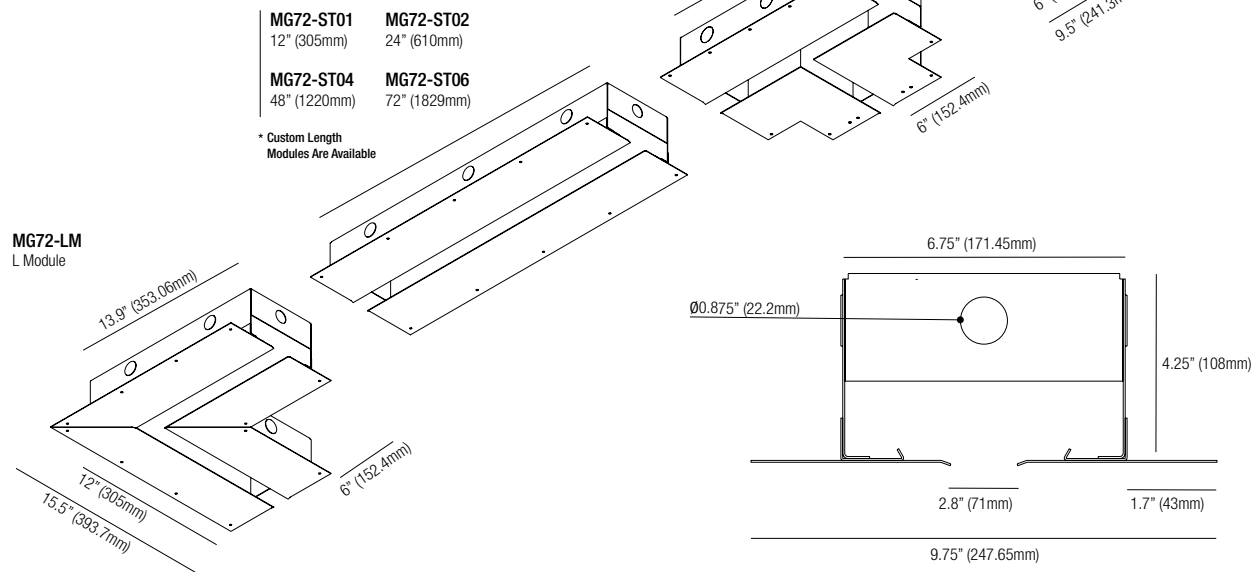


DAVID 72

design: Lapo Grassellini


Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 37V)

Power
Pouissance
Potencia
20W

160mm (6.29")



Photometric diagrams

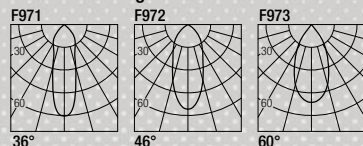

CCT	Flux	CRI
2700K	1700 lm	93
3000K	1830 lm	93
3500K	1890 lm	93
4000K	1950 lm	93



Code Construction

Construction du code produit
Construcción del código de producto

DA72|XX|9|X|

DA72	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		27 2700K			S 36°
		30 3000K			M 46°
		35 3500K			W 60°
		40 4000K			
		CU Custom			

Optionals - Accessoires - Accesorios

L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

Drivers

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



0-10V

FLEXA-60-PRO-CC-10V

Programmable 60W CC 0-10V Dimming
Dimming Range: 0.1%

Min. 1/Max. 1 Fixtures per Driver

Phase

FLEXA-23-500-CC-ELV

23W 500mA Constant Current
Dimming Range: 10%

Min. 1/Max. 1 Fixtures per Driver

Lutron 2-Wire Phase

LTEA.3

Hi-Lume 2-Wire Phase
500mA Constant Current
Dimming Range: 1%

Min. 1/Max. 1 Fixtures per Driver

Lutron Ecosystem

LDE.2

Hi-Lume Ecosystem Premier
500mA Constant Current
Dimming Range: 1%

Min. 1/Max. 1 Fixtures per Driver





LEONARD 72

design: Lapo Grassellini


Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 18V)

Power
Puissance
Potencia
10W

100mm (3.93")



Photometric diagrams

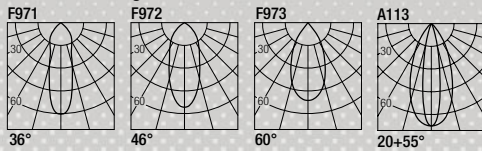

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+
† Dim Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

LN72,XX,9,X

LN72	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Angulo del haz
		27 2700K			S 36°
		30 3000K			M 46°
		35 3500K			W 60°
		40 4000K			D 20+55°
		DW Dim Warm † @ 420mA			

Optionals - Accessoires - Accesorios

L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

Drivers

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



0-10V

FLEXA-60-PRO-CC-10V

Programmable 60W CC 0-10V Dimming
Dimming Range: 0.1%

Min. 1/Max. 3 Fixtures per Driver

Phase

FLEXA-12-500-CC-ELV

12W 500mA Constant Current
Dimming Range: 10%

Min. 1/Max. 1 Fixtures per Driver

FLEXA-23-500-CC-ELV

23W 500mA Constant Current
Dimming Range: 10%

Min. 2/Max. 2 Fixtures per Driver

Lutron 2-Wire Phase

LTEA.2

Hi-Lume 2-Wire Phase
500mA Constant Current
Dimming Range: 1%

Min. 1/Max. 2 Fixtures per Driver

LTEA.3

Hi-Lume 2-Wire Phase
500mA Constant Current
Dimming Range: 1%

Min. 2/Max. 3 Fixtures per Driver

Lutron Ecosystem

LDE.1

Hi-Lume Ecosystem
500mA Constant Current
Dimming Range: 1%

Min. 1/Max. 1 Fixtures per Driver

LDE.2

Hi-Lume Ecosystem Premier
500mA Constant Current
Dimming Range: 1%



Min. 2/Max. 2 Fixtures per Driver



PRINCE 72



design: Lapo Grassellini

106mm (4.17")




Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 37V)

Power
Puissance
Potencia
20W

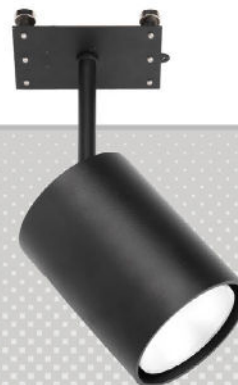

Photometric diagrams

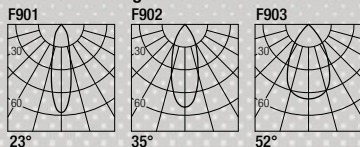

CCT	Flux	CRI
2700K	1700 lm	93
3000K	1830 lm	93
3500K	1890 lm	93
4000K	1950 lm	93

Code Construction

Construction du code produit
Construcción del código de producto

PR72.XX.9.X


PR72	XX	Color Temp.	9	X	Beam angle
		Température couleur Temperatura de color			Angle de faisceau Ángulo del haz
		27 2700K		S	23°
		30 3000K		M	35°
		35 3500K		W	52°
		40 4000K			
		CU Custom			

Drivers

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



0-10V

FLEXA-60-PRO-CC-10V

Programmable 60W CC 0-10V Dimming
Dimming Range: 0.1%

Min. 1/Max. 1 Fixtures per Driver

Phase

FLEXA-23-500-CC-ELV

23W 500mA Constant Current
Dimming Range: 10%

Min. 1/Max. 1 Fixtures per Driver

Lutron 2-Wire Phase

LTEA.3

Hi-Lume 2-Wire Phase
500mA Constant Current
Dimming Range: 1%

Min. 1/Max. 1 Fixtures per Driver

Lutron Ecosystem

LDE.2

Hi-Lume Ecosystem Premier
500mA Constant Current
Dimming Range: 1%

Min. 1/Max. 1 Fixtures per Driver

BEN 72

design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación


24VDC

Power
Pouissance
Potencia


30W



500mm (19.68")



Photometric diagrams



CCT	Flux	CRI
2700K	2100 lm	95+
3000K	2142 lm	95+
3500K	2186 lm	95+
4000K	2224 lm	95+



Code Construction

Construction du code produit
Construcción del código de producto

BE720XX

BE720

XX

Color Temp.

Température couleur
Temperatura de color

27 2700K

30 3000K

35 3500K


40 4000K

Drivers

Alimentateurs
Alimentadores

Parallel wiring

Câblage en parallèle
Cableado en paralelo



0-10V

DL010-024-100VD

100W CV 0-10V Dimming
Dimming Range: 1%

Min. 1/Max. 3 Fixtures per Driver

Phase

DLELD-024-100W

96W Constant Voltage
Dimming Range: 10%

Min. 1/Max. 3 Fixtures per Driver

Lutron 2-Wire Phase

LTEA.CV.1

Hi-Lume 2-Wire Phase
40W Constant Voltage
Dimming Range: 1%

Min. 1/Max. 1 Fixtures per Driver

LTEA.CV.2

Hi-Lume 2-Wire Phase
96W Constant Voltage
Dimming Range: 1%

Min. 1/Max. 3 Fixtures per Driver

Lutron Ecosystem

LDE.CV.1

Hi-Lume Ecosystem
40W Constant Voltage
Dimming Range: 1%

Min. 1/Max. 1 Fixtures per Driver

LDE.CV.2

Hi-Lume Ecosystem
96W Constant Voltage
Dimming Range: 1%

Min. 1/Max. 3 Fixtures per Driver