MICRO C

Microspot with articulating base and magnetic ball joint that offers light efficiency to shop windows, display units, and other small space.

DETAILS.
FINISHES:
BLACK, WHITE, CHROMIUM, GOLD, OR BRUSHED NICKEL
***CUSTOM RAL AVAILABLE WITH MINIMUM QUANTITY.**

SHADE SIZE: 0.6" X 0.8" H; 1.2" BASE
OVERALL HEIGHT: 1.5"

1.5W MAX LED, 150LM, 0-10V DIMMING
CONSTANT CURRENT 500MA - CRI 80 OR 90

COLOR TEMPERATURE AVAILABLE:
2400K, 2700K, 3000K, 3500K, 4000K, 5000K

AVAILABLE DEGREES:
16 , 24 , 40 , ELLIPTIC

IP40 - FOR INTERIOR USE ONLY.
ETL LISTED

IIPL

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

MICRO C

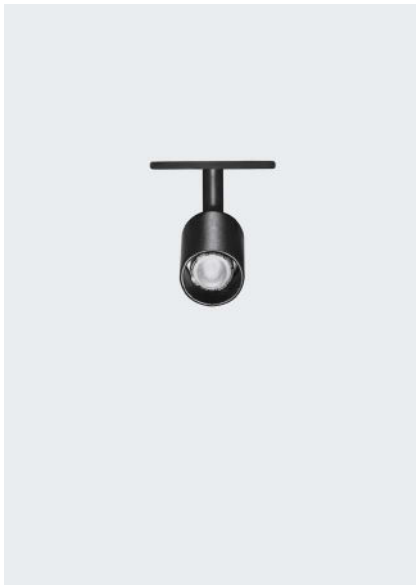

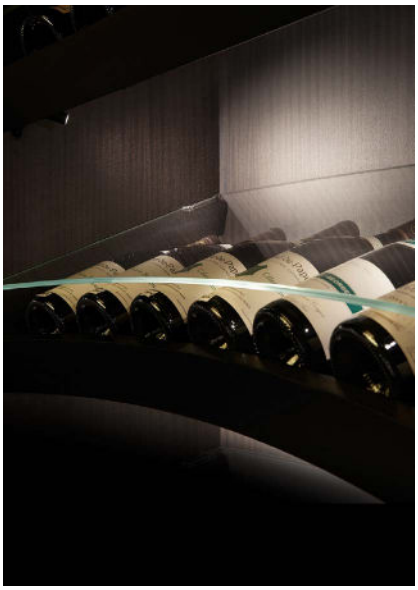

II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

MICRO C

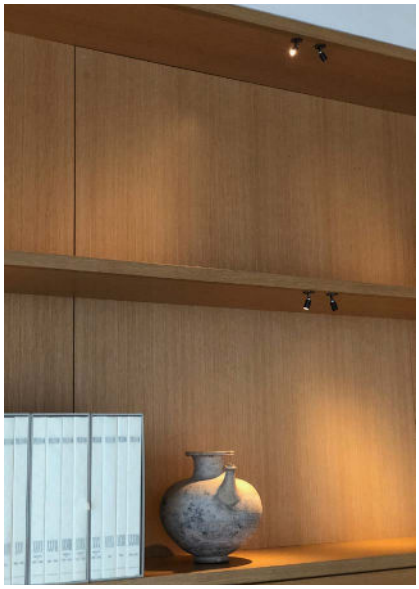

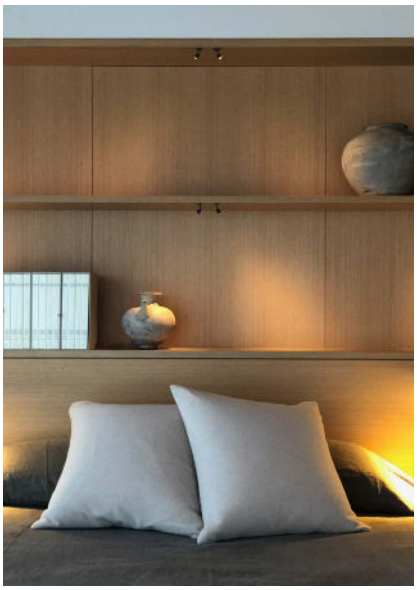

Micro C

REF: SC000-A

SPOTS EN

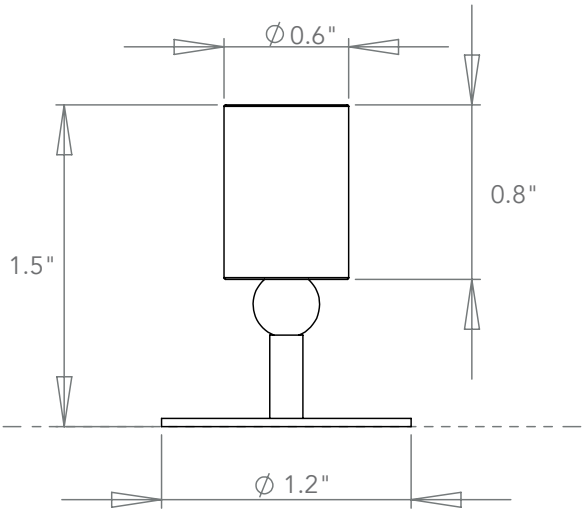

↓ PRODUCT DESCRIPTION

This microspot, part of the «C» range, has a magnetic ball joint and offers a high degree of lighting efficiency despite its small size. Used for precision luminous flux, its sleek, miniaturized design makes it very easy to fit in shop windows, display units, and other small spaces.

↓ OUTPUT

1,5W

↓ LUMENS

150lm

↓ CRI

IRC80 IRC90

↓ POWER SUPPLY

500mA

↓ DIMMING

1-10V DALI DMX

↓ DEGREES

16° 24° 40° ELL

↓ IP RATING

IP 40

↓ USE

↓ COLOUR TEMPERATURE

2400K 2700K 3000K 3500K 4000K 5000K

IPL

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

Micro C

REF: SC000-A

SPOTS EN

↓ SOURCES
- **Luminous flux according to Bining: 150 lumens;**
- **Colour temperature: 2400 K to 5000 K;**
- **Service Range: 70 % of nominal flux after 25 000 hours;**
- **Colour Rendering Index: CRI 80 or CRI 90.**

↓ OPTICAL CHARACTERISTICS
- **PMMA acrylic lens, efficiency ~90 %;**
- **Available degrees: 16°, 24°, 40° & Elliptic.**

↓ ELECTRICAL CHARACTERISTICS
- **Constant current supply: 500 mA;**
- **Supply connection: Polarised output connectors;**
- **Power consumption to 1.5W max, excluding supply.;**
- **Electrical Classification: Class III SELV device.**

↓ MECHANICAL CHARACTERISTICS
- **Articulating base, patented magnetic ball joint;**
- **Mounting on hook;**
- **Operating temperature: -5° +40°;**
- **ROHS components;**
- **Interior use only.**

↓ SPECIFICITIES
- **Electrolytic treatment available;**
- **3 years guarantee.**

↓ CLASSIFICATION

Product Ref.		SC000					
Specification			A				
Colour	Black			BK			
	White			WH			
	Chromium			CU			
	Gold			CU			
	Brushed Nickel			CU			
	RAL			CU			
Colour temperature	2400K				24		
	2700K				27		
	3000K				30		
	3500K				35		
	4000K				40		
	5000K				50		
Degrees	16°					16	
	24°					24	
	40°					40	
	Elliptic					EL	
REFERENCE		SC000 -	A -	BK -	24 -	16	