



SPLITLINE 52

Clean and simple architectural recessed modular profile design. The bigger Splitline 52 offers new opportunities thanks to the extended range of flexible LED modules available in recessed, flushed or adjustable heads. Profile and modules are available in black. Please call showroom for more information. Adjustable/Non Adjustable LED available.

DETAILS.

PROFILE: 5 1/4" W X 5 9/16" H

VISIBLE OPENING: 2 1/16"

STANDARD LED OPTIONS:

1, 2, OR 3 X 7W POWERED MODULES, 2700K OR 3000K

REFLECTORS: 20°, 33° OR 50°

IP20 - RATED FOR DRY/DAMP LOCATIONS.

*DIMMABLE LED POWER SUPPLY AVAILABLE.

*REFER TO SPEC SHEETS FOR AVAILABLE INDIVIDUAL LED MODULES.

SPLITLINE 52





II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM


5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

SPLITLINE 52

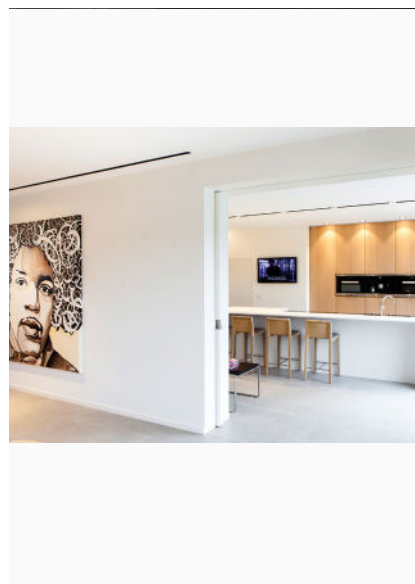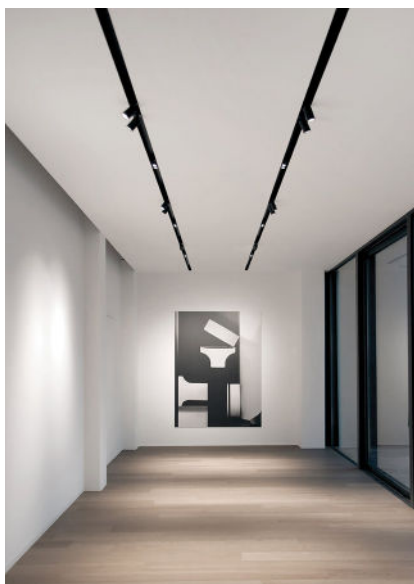

SPLITLINE 52

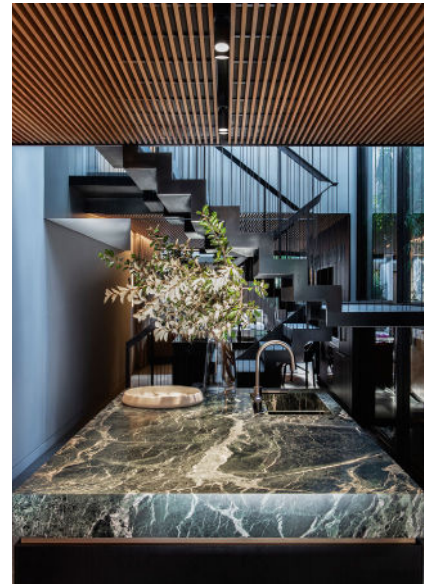


PROFILE


SPL 52 - PROFILE ◇
6 372 52 00 ◇

◇ = B
 MAX.L / PROFILE: 19'-8"-1/4
 Lb / ft

11.0




TOL EN12020-2

END CAP


SPL 52 - END CAP ◇
372 52 03 01 ◇

◇ = B

0.2



CORNER

SPL 52 - CORNER 180°
6 372 52 06 01


0.7


SPL 52 - CORNER 90°
6 372 52 06 06

0.7



FIXATION

max. 1/2"

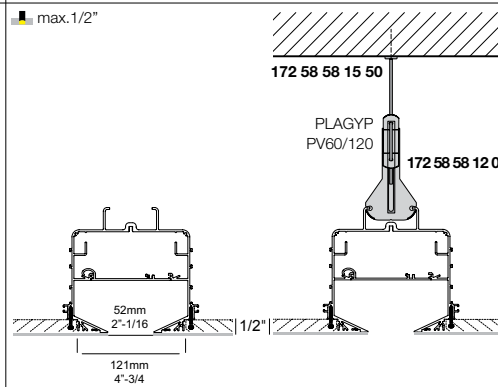
**CURRENT
SUPPLY**



SPLITLINE 52 LED

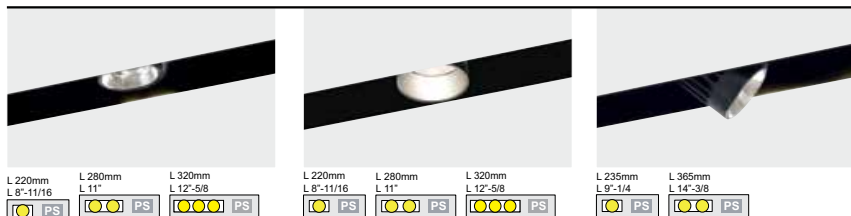

CRI > 90	SPL52 - 1 LED	SPL52 - 1 LED D	SPL52 - 1 RB LED
3500 K	LED 7.1W / 798lm / 350mA	LED 7.1W / 798lm / 350mA	LED 7.1W / 798lm / 350mA
In. FE	REFL FL 33° 6 372 52 61 811 952 ED8	6 372 52 61 811 952 D ED8	6 372 52 63 811 952 ED8
	REFL WFL 50° 6 372 52 61 811 953 ED8		6 372 52 63 811 953 ED8
3000 K	LED 7.1W / 774lm / 350mA	LED 7.1W / 774lm / 350mA	LED 7.1W / 774lm / 350mA
In. FE	REFL FL 33° 6 372 52 61 811 932 ED8	6 372 52 61 811 932 D ED8	6 372 52 63 811 932 ED8
	REFL WFL 50° 6 372 52 61 811 933 ED8		6 372 52 63 811 933 ED8
2700 K	LED 7.1W / 743lm / 350mA	LED 7.1W / 743lm / 350mA	LED 7.1W / 743lm / 350mA
In. FE	REFL FL 33° 6 372 52 61 811 922 ED8	6 372 52 61 811 922 D ED8	6 372 52 63 811 922 ED8
	REFL WFL 50° 6 372 52 61 811 923 ED8		6 372 52 63 811 923 ED8
CRI > 90	SPL52 - 2 LED	SPL52 - 2 LED D	SPL52 - 2 RB LED
3500 K	2 x LED 7.1W / 798lm / 350mA	2 x LED 7.1W / 798lm / 350mA	2 x LED 7.1W / 798lm / 350mA
In. FE	REFL FL 33° 6 372 52 61 812 952 ED8	6 372 52 61 812 952 D ED8	6 372 52 63 812 952 ED8
	REFL WFL 50° 6 372 52 61 812 953 ED8		6 372 52 63 812 953 ED8
3000 K	2 x LED 7.1W / 774lm / 350mA	2 x LED 7.1W / 774lm / 350mA	2 x LED 7.1W / 774lm / 350mA
In. FE	REFL FL 33° 6 372 52 61 812 932 ED8	6 372 52 61 812 932 D ED8	6 372 52 63 812 932 ED8
	REFL WFL 50° 6 372 52 61 812 933 ED8		6 372 52 63 812 933 ED8
2700 K	2 x LED 7.1W / 743lm / 350mA	2 x LED 7.1W / 743lm / 350mA	2 x LED 7.1W / 743lm / 350mA
In. FE	REFL FL 33° 6 372 52 61 812 922 ED8	6 372 52 61 812 922 D ED8	6 372 52 63 812 922 ED8
	REFL WFL 50° 6 372 52 61 812 923 ED8		6 372 52 63 812 923 ED8
CRI > 90	SPL52 - 3 LED	SPL52 - 3 LED D	ADJUSTABLE 120-277V / 60Hz MAINS DIMMING (FE) [0.7] IP20 DAMP
3500 K	3 x LED 7.1W / 798lm / 350mA	3 x LED 7.1W / 798lm / 350mA	
In. FE	REFL FL 33° 6 372 52 61 813 952 ED8	6 372 52 61 813 952 D ED8	
	REFL WFL 50° 6 372 52 61 813 953 ED8		
3000 K	3 x LED 7.1W / 774lm / 350mA	3 x LED 7.1W / 774lm / 350mA	
In. FE	REFL FL 33° 6 372 52 61 813 932 ED8	6 372 52 61 813 932 D ED8	
	REFL WFL 50° 6 372 52 61 813 933 ED8		
2700 K	3 x LED 7.1W / 743lm / 350mA	3 x LED 7.1W / 743lm / 350mA	
In. FE	REFL FL 33° 6 372 52 61 813 922 ED8	6 372 52 61 813 922 D ED8	
	REFL WFL 50° 6 372 52 61 813 923 ED8		
	NON ADJUSTABLE 120-277V / 60Hz MAINS DIMMING (FE) [0.7] IP20 DAMP	NON ADJUSTABLE 120-277V / 60Hz MAINS DIMMING (FE) [0.7] IP20 DAMP	

OTHER CRI OR KELVIN ON REQUEST



FULL INFO TECHNICAL CHAPTER



REQUIREMENTS

INSTALLATION

MIDISPY TUBE ◇

414 03 00 ◇

◇ = B / MMAT / SG / W




MIDISPY TUBE B

MMAT


SG

W

SPLITLINE 52 LED



SPLITLINE 52 - MIDISPY



CRI > 80	SPL52 - 1 LED
3500 K	LED 6W / 558lm / 500mA
Ilm. FE	6 372 52 1852 ED8
3000 K	LED 6W / 558lm / 500mA
Ilm. FE	6 372 52 1832 ED8
2700 K	LED 6W / 558lm / 500mA
Ilm. FE	6 372 52 1822 ED8
NON ADJUSTABLE MAINS DIMMING (FE) 120V / 60Hz 13 IP20 DAMP	

CRI > 80	SPL52 - 2 LED
3500 K	2 x LED 6W / 558lm / 500mA
Ilm. FE	6 372 52 2852 ED8
3000 K	2 x LED 6W / 558lm / 500mA
Ilm. FE	6 372 52 2832 ED8
2700 K	2 x LED 6W / 558lm / 500mA
Ilm. FE	6 372 52 2822 ED8
NON ADJUSTABLE MAINS DIMMING (FE) 120V / 60Hz 13 IP20 DAMP	

CRI > 80	SPL52 - MIDISPY
3500 K	LED 6W / 558lm / 500mA
Ilm. FE	6 372 52 272 852 ED8 ◇ ◇ = B / W
3000 K	LED 6W / 558lm / 500mA
Ilm. FE	6 372 52 272 832 ED8 ◇ ◇ = B / W
2700 K	LED 6W / 558lm / 500mA
Ilm. FE	6 372 52 272 822 ED8 ◇ ◇ = B / W
ADJUSTABLE 0-90° / 350° MAINS DIMMING (FE) 120V / 60Hz 13 IP20 DAMP REQUIREMENTS MIDISPY TUBE	

CRI > 90	SPL52 - MIDISPY
3500 K	LED 9.5W / 755lm / 500mA
Ilm. FE	6 372 52 271 953 ◇ ◇ = B / W
3000 K	LED 9.5W / 755lm / 500mA
Ilm. FE	6 372 52 271 933 ◇ ◇ = B / W
2700 K	LED 9.5W / 755lm / 500mA
Ilm. FE	6 372 52 271 923 ◇ ◇ = B / W
ADJUSTABLE 0-90° / 350° MAINS DIMMING (FE) 120V / 60Hz 13 IP20 DAMP REQUIREMENTS MIDISPY TUBE	

OTHER CRI OR KELVIN ON REQUEST



INTERIEUR MACOENS

FULL INFO TECHNICAL CHAPTER

REQUIREMENTS

SPY TUBE ◇
414 01 00 ◇
◇ = B / MMAT / SG / W

53mm
2"-1/16"



FULL INFO TECHNICAL CHAPTER

ACCESSORIES

HONEYCOMB 50 ◇
413 03 01 ◇
◇ = B

Ø2"



LINEAR SPREAD LENS 50
413 03 02

Ø2"



SPREAD LENS 50
413 03 03

Ø2"




SOFTENING LENS 50
413 03 04

Ø2"



GLASS SBL 50
413 03 05

Ø2"




SPY TUBE B

MMAT

SG

W

SPLITLINE 52 - SPY

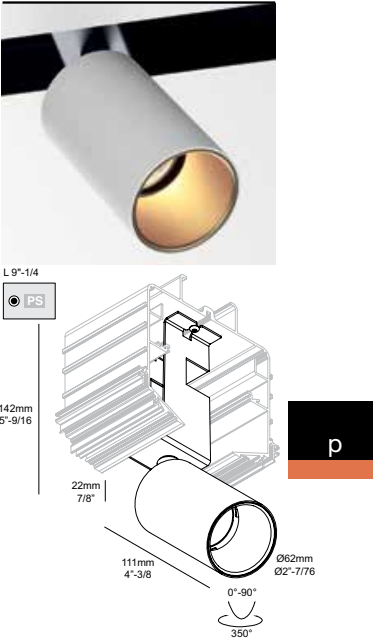

CRI > 90		SPL52 - SPY
3500 K		LED 10.4W / 1109lm / 500mA
Illum. FE	REFL SP 18°	6 372 52 371 811 951 ED8 ◇ ◇ = B / W
	REFL FL 33°	6 372 52 371 811 932 ED8 ◇ ◇ = B / W
3000 K		LED 10.4W / 1075lm / 500mA
Illum. FE	REFL SP 18°	6 372 52 371 811 931 ED8 ◇ ◇ = B / W
	REFL FL 33°	6 372 52 371 811 932 ED8 ◇ ◇ = B / W
2700 K		LED 10.4W / 1032lm / 500mA
Illum. FE	REFL SP 18°	6 372 52 371 811 921 ED8 ◇ ◇ = B / W
	REFL FL 33°	6 372 52 371 811 922 ED8 ◇ ◇ = B / W
ADJUSTABLE 0-90° / 350° MAINS DIMMING (FE) 120V / 60Hz 1.5 IP20 DAMP REQUIREMENTS SPY TUBE ACCESSORIES HONEYCOMB / LENS / GLASS		

CRI > 90		SPL52 - SPY HP
3500 K		LED 16.8W / 2068lm / 500mA
Illum. FE	REFL FL 33°	6 372 52 371 21 951 ED8 ◇ ◇ = B / W
3000 K		LED 16.8W / 1995lm / 500mA
Illum. FE	REFL FL 33°	6 372 52 371 21 931 ED8 ◇ ◇ = B / W
2700 K		LED 16.8W / 1923lm / 500mA
Illum. FE	REFL FL 33°	6 372 52 371 21 921 ED8 ◇ ◇ = B / W
ADJUSTABLE 0-90° / 350° MAINS DIMMING (FE) 120V / 60Hz 1.3 IP20 DAMP REQUIREMENTS SPY TUBE ACCESSORIES HONEYCOMB / LENS / GLASS		

OTHER CRI OR KELVIN ON REQUEST