



SPLITLINE M52

Similar to SplitlineM20, all modules can be toolfree installed and repositioned into the profile thanks to their magnetic fixation, allowing the end user to adapt the light according to the setting of the room.

This wider profile also allows for adjustable spot modules to be hidden inside the black line in the ceiling.

Ceiling Thickness: 1/2" max

180° corner connectors and 90° corner connectors available.

DETAILS.

PROFILE: 6" W X 4 1/8" H

VISIBLE OPENING: 2 1/16"

MAX 200W 48V-DC (2 CONDUCTORS)


*DIMMABLE LED POWER SUPPLY AVAILABLE.

IP20 - RATED FOR DRY/DAMP LOCATIONS.

CLASS II

*REFER TO SPEC SHEETS FOR INDIVIDUAL LED MODULES.

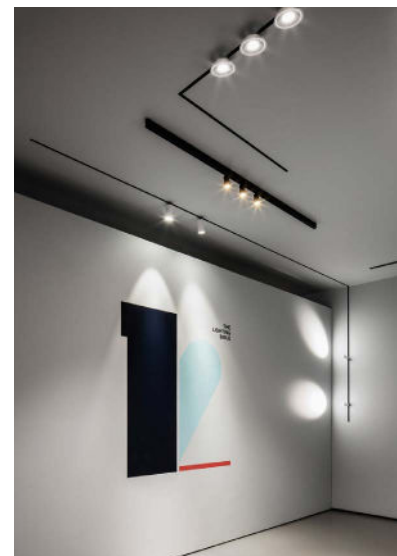SPLITLINE M52



II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

SPLITLINE M52



II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

SPLITLINE M52



MAGNETIC PROFILES

With the magnetic profiles, Delta Light takes it to the next level in the profile section. These profiles offer the highest degree of freedom and flexibility, as all modules have a magnetic fixation. SPLITLINE M20 and M52 allow for a neat, trimless installation, while SHIFTLINE M26L, M35 and M44 can be used for projects where surface or suspended mounting is required. To create the optimal light setting, multiple light modules are available: spot modules with different beams and lumen packages going up to 2000lm for accent lighting, linear LED lines for general or wallwash lighting and pendant modules for an elegant finish of the room. All modules can be placed toolfree into the profile and repositioned afterwards thanks to their magnetic fixation. Simply click the module into the profile and both mechanical and electrical connection are ensured. As this family of profiles is powered by 48V, Smart 48 can be used for an easy 2-wire dimming/power solution, or even wireless. As an extra, today we even offer DALI modules for individual control of luminaires.

PROFILES

								
			SPLITLINE M20	SPLITLINE M52	SHIFTLINE M26L	SHIFTLINE M26H	SHIFTLINE M35R	SHIFTLINE M44
ACCENT LIGHTING		SPY 27	•	✓		✓	✓	
		SPY 39	••	✓	✓	✓	✓	
		SPY 52	•	✓	✓	✓	✓	
		SPY 66	•	✓	✓	✓	✓	
		SPY FOCUS	•	✓	✓	✓	✓	
		PUNK	•	✓	✓	✓	✓	
		VIZR	•	✓	✓	✓	✓	
DECORATIVE LIGHTING		HEDRA	•	✓	✓	✓	✓	
		TWEETER	•	✓	✓	✓		
		TWEETER BL	•	✓	✓	✓		
GENERAL LIGHTING		GIBBO	•	✓	✓	✓	✓	✓
		MICROSPYC	•	✓	✓	✓	✓	✓
		LED LINE HE		✓	✓*	✓	✓*	✓
		LED LINE UP				✓		✓
		DOT.COM M	••••	✓	✓*	✓	✓*	✓
		DOT.COM L	••					✓
		LED	•	✓				✓
WALLWASH LIGHTING		LED OK	••	✓				
		LED D	•	✓				
		DOT.COM		✓		✓		

*MODULE NOT FLUSH WITH PROFILE

PRO 661

II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038


P. 323 467 5635
F. 323 467 5634

SPLITLINE M52

SPLITLINE M52

One catchphrase could best describe the Splitline M52: Flexibility at its best! Apart from protruding spots and pendant modules, this wider profile also allows for adjustable spot modules to be hidden inside the black line in the ceiling, resulting in a serene setting of the room. Similar to Splitline M20, all modules can be toolfree installed and repositioned into the profile thanks to their magnetic fixation, allowing the end user to adapt the light according to the setting of the room.

www.deltalight.us/splitlinem52
www.deltalight.ca/splitlinem52







SPM52 x 2 LED

PROFILES


WIRELESS
CONTROL
Splitline
for all
adjustable
luminaire
TECHNICAL DATA

PRO




1
PROFILE CONSTRUCTION

 SPM52 - PROFILE 3' 3/8" 6 420 52 10 00	 SPM52 - CUSTOMISED 6 24413 0000	 SPM52 - END CAP 420 52 03 01	 SPM - CORNER 180° 420 06 01	 SPM52 - CORNER 90° 420 52 06 06
Ø 8	Ø 8	Ø 8	Ø 8	Ø 8
SPM52 - PROFILE 6' 6" 3/4" 6 420 52 20 00	MAX.L / PROFILE: 9' 10"-1/8" 48V-DC (2 CONDUCTORS) 2 DIM CONDUCTORS IP20 DAMP	MAX.L / PROFILE: 9' 10"-1/8" 48V-DC (2 CONDUCTORS) 2 DIM CONDUCTORS IP20 DAMP	REQUIREMENTS PROFILE CONNECTION	REQUIREMENTS PROFILE CONNECTION
SPM52 - PROFILE 9' 10"-1/8" 6 420 52 30 00	Ø 8	Ø 8	Ø 8	Ø 8
48V-DC (2 CONDUCTORS) 2 DIM CONDUCTORS IP20 DAMP	48V-DC (2 CONDUCTORS) 2 DIM CONDUCTORS IP20 DAMP	48V-DC (2 CONDUCTORS) 2 DIM CONDUCTORS IP20 DAMP	48V-DC (2 CONDUCTORS) 2 DIM CONDUCTORS IP20 DAMP	48V-DC (2 CONDUCTORS) 2 DIM CONDUCTORS IP20 DAMP

2
PROFILE FIXATION



3
PROFILE CONNECTION

 SPM - SUPPLY 48V 6 420 99 03	 SPM - CONNECTOR 48V-180° 420 99 01	 SPM - CONNECTOR 48V-0-180° 6 420 99 02
48V-DC MAX. 96W / SUPPLY / MAX.165° IP20 DAMP	48V-DC MAX. 96W / SUPPLY / MAX.165° IP20 DAMP	48V-DC MAX. 96W / SUPPLY / MAX.165° IP20 DAMP

4
LIGHT MODULES

SEE PAGE PRO 681-693

REQUIREMENTS ► INFO FOLD-OUT RIGHT / OPTIONS ► INFO TECHNICAL CHAPTER / ACCESSORIES ► INFO FOLD-OUT LEFT

PRO 667

II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

SPLITLINE M52

SPY 391



REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

	MDL											
	3500K / CRI>90				3000K / CRI>90				2700K / CRI>90			
	LED 8.6W / 1128lm / 48V DC				LED 8.6W / 1089lm / 48V DC				LED 8.6W / 1041lm / 48V DC			
	20°	40°	20°	40°	20°	40°	20°	40°	20°	40°	20°	40°
M20	6.23315 9320	6.23315 9330	6.23135 9320	6.23135 9330	6.23135 9330	6.23135 9330	6.23135 9320	6.23135 9330	6.23135 9320	6.23135 9330	6.23135 9320	6.23135 9330
M26L	6.23258 9320	6.23258 9330	6.23258 9320	6.23258 9330	6.23258 9330	6.23258 9330	6.23258 9320	6.23258 9330	6.23258 9320	6.23258 9330	6.23258 9320	6.23258 9330
M26H	6.23315 9320	6.23315 9330	6.23315 9320	6.23315 9330	6.23315 9330	6.23315 9330	6.23315 9320	6.23315 9330	6.23315 9320	6.23315 9330	6.23315 9320	6.23315 9330
M35R	6.23258 9320	6.23258 9330	6.23258 9320	6.23258 9330	6.23258 9330	6.23258 9330	6.23258 9320	6.23258 9330	6.23258 9320	6.23258 9330	6.23258 9320	6.23258 9330
M44												
M52	6.24430 9320	6.24430 9330	6.24430 9320	6.24430 9330	6.24430 9330	6.24430 9330	6.24430 9320	6.24430 9330	6.24430 9320	6.24430 9330	6.24430 9320	6.24430 9330

E	DALI DIM							
	3500K / CRI>90		3000K / CRI>90		2700K / CRI>90			
	LED 8,6W / 1128lm / 48VDC		LED 8,6W / 1089lm / 48VDC		LED 8,6W / 1041lm / 48VDC			
	20°	40°	20°	40°	20°	40°		
M20	6.23116.9525	6.23116.9531	6.23116.9525	6.23116.9535	6.23129.9525	6.23129.9535	6.23129.9525	6.23129.9535
M26L	6.23259.9525	6.23259.9535	6.23259.9525	6.23259.9535	6.23259.9525	6.23259.9535	6.23259.9525	6.23259.9535
M26H	6.23116.9525	6.23116.9535	6.23116.9525	6.23116.9535	6.23116.9525	6.23116.9535	6.23116.9525	6.23116.9535
M35R	6.23259.9525	6.23259.9535	6.23259.9525	6.23259.9535	6.23259.9525	6.23259.9535	6.23259.9525	6.23259.9535
M36L								
M52	6.24431.9525	6.24431.9535	6.24431.9525	6.24431.9535	6.24431.9525	6.24431.9535	6.24431.9525	6.24431.9535

◇B/FBR/FG/GC/W

 0.7 IP20 DAMP

SPY 391 L



REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

	MDL					
	3500K / CRI>90		3000K / CRI>90		2700K / CRI>90	
	LED 8.6W / 1128lm / 48V-DC		LED 8.6W / 1089lm / 48V-DC		LED 8.6W / 1041lm / 48V-DC	
	20°	20°	20°	20°	20°	20°
M20	6.2389 9320 ◊	6.2389 9330 ◊	6.2389 9320 ◊	6.2389 9330 ◊	6.2389 9320 ◊	6.2389 9330 ◊
M26L	6.2328 9320 ◊	6.2328 9330 ◊	6.2328 9320 ◊	6.2328 9330 ◊	6.2328 9320 ◊	6.2328 9330 ◊
M26H	6.2339 9320 ◊	6.2339 9330 ◊	6.2339 9320 ◊	6.2339 9330 ◊	6.2339 9320 ◊	6.2339 9330 ◊
M35R	6.2328 9320 ◊	6.2328 9330 ◊	6.2328 9320 ◊	6.2328 9330 ◊	6.2328 9320 ◊	6.2328 9330 ◊
M44						
M44	6.3440 9330 ▲	6.3440 9350 ▲	6.3440 9330 ▲	6.3440 9350 ▲	6.3440 9330 ▲	6.3440 9350 ▲

[illegible]

◆B/FBR/FG/GC/W

 0.9 IP20 DAMP

SPY 392



REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

	MDL					
	3500K / CRI>90		3000K / CRI>90		2700K / CRI>90	
	2x LED 8.6W / 1128mm / 48V DC		2x LED 8.6W / 1089mm / 48V DC		2x LED 8.6W / 1041mm / 48V DC	
	40°	40°	40°	40°	40°	40°
M20	6.23317 °920 ◊	6.23317 °930 ◊	6.23317 °930 ◊	6.23317 °930 ◊	6.23317 °920 ◊	6.23317 °930 ◊
M26L	6.23260 °950 ◊	6.23260 °950 ◊	6.23260 °930 ◊	6.23260 °930 ◊	6.23260 °920 ◊	6.23260 °930 ◊
M26H	6.23317 °950 ◊	6.23317 °950 ◊	6.23317 °930 ◊	6.23317 °930 ◊	6.23317 °920 ◊	6.23317 °930 ◊
M35R	6.23260 °950 ◊	6.23260 °950 ◊	6.23260 °930 ◊	6.23260 °930 ◊	6.23260 °920 ◊	6.23260 °930 ◊
M44	-	-	-	-	-	-
M52	-	-	-	-	-	-

	DALI DIM					
	3500K / CRI>90		3000K / CRI>90		2700K / CRI>90	
	2x LED 8.6W / 1128lm / 48VDC		2x LED 8.6W / 1089lm / 48VDC		2x LED 8.6W / 1041lm / 48VDC	
	20°	40°	20°	40°	20°	40°
M20	6.23121 9525 °C	6.23121 9535 °C	6.23121 9535 °C	6.23121 9535 °C	6.23121 9525 °C	6.23121 9535 °C
M26L	6.23261 9525 °C	6.23261 9535 °C	6.23261 9535 °C	6.23261 9535 °C	6.23261 9525 °C	6.23261 9535 °C
M26H	6.23316 9525 °C	6.23316 9535 °C	6.23316 9525 °C	6.23316 9535 °C	6.23316 9525 °C	6.23316 9535 °C
M35R	6.23261 9525 °C	6.23261 9535 °C	6.23261 9535 °C	6.23261 9535 °C	6.23261 9525 °C	6.23261 9535 °C
M44	-	-	-	-	-	-
M52	-	-	-	-	-	-

◇ B / W

Class 2 1.1 IP20 DAMP

SPY 52



REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE
OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

	MDL					
	3500K /CRI->90		3000K /CRI->90		2700K /CRI->90	
	LED 12.4W / 152lm/18 /48V-DC 20°	45°	LED 12.4W / 1467lm /48V-DC 20°	45°	LED 12.4W / 1467lm /48V-DC 20°	45°
M20	6.23232 9530 ◊	6.23232 9530 ◊	6.23232 9330 ◊	6.23232 9330 ◊	6.23232 9330 ◊	6.23232 9330 ◊
M26L	6.23274 9520 ◊	6.23274 9530 ◊	6.23274 9320 ◊	6.23274 9330 ◊	6.23274 9320 ◊	6.23274 9330 ◊
M26H	6.23232 9520 ◊	6.23232 9530 ◊	6.23232 9320 ◊	6.23232 9330 ◊	6.23232 9320 ◊	6.23232 9330 ◊
M35R	6.23274 9520 ◊	6.23274 9530 ◊	6.23274 9320 ◊	6.23274 9330 ◊	6.23274 9320 ◊	6.23274 9330 ◊
M44						
M52	6.24434 9520 ◊	6.24434 9530 ◊	6.24434 9330 ◊	6.24434 9330 ◊	6.24434 9320 ◊	6.24434 9330 ◊

[illegible]

◇B / FBR / FG / GC / W

 IP20 DAME

SPY 66



REQUIREMENTS
LED POWER SUPPLY 48V-DC REMOTE

OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

3500K / CRi-90				MDL				2700K / CRi-90			
LED 24.6W / 2912lm / 48V-DC				LED 24.6W / 2907lm / 48V-DC				LED 24.6W / 2829lm / 48V-DC			
18"	30"	45"		18"	30"	45"		18"	30"	45"	
M20	6.23527 9510	6.23527 9520	6.23527 9530	6.23527 9310	6.23527 9320	6.23527 9330		6.23527 9110	6.23527 9120	6.23527 9130	
M20H	6.23527 9510	6.23527 9520	6.23527 9530	6.23527 9310	6.23527 9320	6.23527 9330		6.23527 9110	6.23527 9120	6.23527 9130	
M20H	6.23527 9510	6.23527 9520	6.23527 9530	6.23527 9310	6.23527 9320	6.23527 9330		6.23527 9110	6.23527 9120	6.23527 9130	
M35R	6.23527 9510	6.23527 9520	6.23527 9530	6.23527 9310	6.23527 9320	6.23527 9330		6.23527 9110	6.23527 9120	6.23527 9130	
M44	-	-	-	-	-	-		-	-	-	
M44	6.23527 9510	6.23527 9520	6.23527 9530	6.23527 9310	6.23527 9320	6.23527 9330		6.23527 9110	6.23527 9120	6.23527 9130	

	DALI DIM								
	3500K / CRI>90			3000K / CRI>90			2700K / CRI>90		
	LED 24.6W / 2901lm / 48V-DC			LED 24.6W / 2901lm / 48V-DC			LED 24.6W / 2829lm / 48V-DC		
	18"	30"	45"	18"	30"	45"	18"	30"	45"
M2GL	6.2328 9515	6.2328 9525	6.2328 9535	6.2328 9515	6.2328 9525	6.2328 9535	6.2328 9515	6.2328 9525	6.2328 9535
M2GH	6.2327 9515	6.2327 9525	6.2327 9535	6.2327 9515	6.2327 9525	6.2327 9535	6.2327 9515	6.2327 9525	6.2327 9535
M3SR	6.2327 9515	6.2327 9525	6.2327 9535	6.2327 9515	6.2327 9525	6.2327 9535	6.2327 9515	6.2327 9525	6.2327 9535
	6.2430 9515	6.2430 9525	6.2430 9535	6.2430 9515	6.2430 9525	6.2430 9535	6.2430 9515	6.2430 9525	6.2430 9535

◇ B/W

13 IP20 DAME

REQUIREMENTS
 SPY 39 TUBE ♦ 24144 0010 B / FBR / FG / GC / W
 SPY 39 L TUBE ♦ 24144 0020 B / FBR / FG / GC / W
 LED POWER SUPPLY

OPTIONS
 DIMMABLE MODULATOR (ONLY FOR MDL)

ACCESSORIES
 VISOR 39

REQUIREMENTS
SPY 52 TUBE ▶ 19810 0100 B / FBR / FG / GC / W
LED POWER SUPPLY

OPTIONS
DIMMABLE MODULATOR (ONLY FOR MDL)

ACCESSORIES
HONEYCOMB / LENS / GLASS 42

REQUIREMENTS
SPY 66 TUBE ▶ 24611 0100 B / FBR / FG / GC / W (for spy 66)
LED POWER SUPPLY

OPTIONS
DIMMABLE MODULATOR (ONLY FOR MDL)

ACCESSORIES
HONEYCOMB
GLASS / LENS 57 (max. 500mA)

REQUIREMENTS ▶ INFO FOLD-OUT RIGHT / OPTIONS ▶ INFO TECHNICAL CHAPTER / ACCESSORIES ▶ INFO FOLD-OUT LEFT

OTHER CRI OR KELVIN ON REQUEST

WIRELESS CONTROL
Suitable for all
dimmable luminaires.

PRO

II PL



OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)



	MDL		
	3500K / CR1-90	3000K / CR1-90	2700K / CR1-90
	LED 8,7W / 351lm / 48V-DC	LED 8,7W / 351lm / 48V-DC	LED 8,7W / 351lm / 48V-DC
		8" 43"	
M20	6 23378 93000 ◊	6 23378 93000 ◊	6 23378 93000 ◊
M26L	6 23230 95000 ◊	6 23230 93000 ◊	6 23230 93000 ◊
M26H	6 23378 95000 ◊	6 23378 93000 ◊	6 23378 93000 ◊
M35R	6 23230 95000 ◊	6 23230 93000 ◊	6 23230 93000 ◊
M44			
M52	6 24428 93000 ◊	6 24428 93000 ◊	6 24428 93000 ◊

	DALI DIM		
	3500K / CRi-90	3000K / CRi-90	2700K / CRi-90
	LED 8,7W / 85lm/48V-DC	LED 8,7W / 85lm/48V-DC	LED 8,7W / 837lm/48V-DC
		8" 4"	
M30	6 23379 9505 ◊	6 23379 9305 ◊	6 23379 9205 ◊
M26L	6 23231 9505 ◊	6 23231 9305 ◊	6 23231 9205 ◊
M26H	6 23379 9505 ◊	6 23379 9305 ◊	6 23379 9205 ◊
M35R	6 23231 9505 ◊	6 23231 9305 ◊	6 23231 9205 ◊
M44			
M52	6 24429 9505 ◊	6 24429 9305 ◊	6 24429 9205 ◊

Class 2 1.3 IP20 DAMP

PRO



OPTIONS
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)




	MDL		
	3500K / CR1-90	3000K / CR1-90	2700K / CR1-90
	LED 17.0W / 209lm / 48V-DC	LED 17.0W / 195lm / 48V-DC	LED 17.0W / 187lm / 48V-DC
		12° 45°	
M20	6 23332 9500 ○	6 23332 9300 ○	6 23332 9200 ○
M26L	6 23323 9500 ○	6 23323 9300 ○	6 23323 9200 ○
M26H	6 23332 9500 ○	6 23332 9300 ○	6 23332 9200 ○
M35R	6 23332 9500 ○	6 23332 9300 ○	6 23332 9200 ○
M44			
M52	6 24426 9500 ○	6 24426 9300 ○	6 24426 9200 ○

E	DALI DIM		
	3500K / CRi-90 LED 17.9W / 2000lm / 48V-DC	3000K / CRi-90 LED 17.9W / 1950lm / 48V-DC	2700K / CRi-90 LED 17.9W / 1874lm / 48V-DC
M20	6 23373 9505 ◊	6 23373 9305 ◊	6 23373 9205 ◊
M26L	6 23233 9505 ◊	6 23233 9305 ◊	6 23233 9205 ◊
M26H	6 23373 9505 ◊	6 23373 9305 ◊	6 23373 9205 ◊
M35R	6 23233 9505 ◊	6 23233 9305 ◊	6 23233 9205 ◊
M44			
M52	6 24427 9505 ◊	6 24427 9305 ◊	6 24427 9205 ◊

◆ B / FBR / FG / W

Class 2 1.3 IP20 DAMP



BOWL GLASS AMBER ▶ 286 67 02
BOWL GLASS OPAL WHITE ▶ 286 67 03
LED POWER SUPPLY 48V-DC REMOTE

OPTIONS
DIMMABLE MODULATOR
REMOTE
(ONLY FOR MDL)

		MDL					
		3500K / CRI>90		3000K / CRI>90		2700K / CRI>90	
		LED 7.1W / B30mm / 48V-DC		LED 7.1W / R50mm / 48V-DC		LED 7.1W / T73mm / 48V-DC	
M20		24"					
M26H							
M26HL							
M35R							
M44							
M52							
		6 421 622 811 950 MDL ◇		6 421 622 811 930 MDL ◇		6 421 622 811 920 MDL ◇	

02	3500K / CRI>90	3000K / CRI>90	2700K / CRI>90
286.6703	LED 7.1W / 850lm / 48V-DC	LED 7.1W / 850lm / 48V-DC	LED 7.1W / 773lm / 48V-DC
REMOTE	24"		
M20	6 23354 9305 ◆	6 23354 9305 ◆	6 23354 9205 ◆
M26L			
M26H			
M35R			
M44			
M52	Ø8 / W		

EXCL GLASS
INCL 1 x CABLE 2 x 18 AWG/ 5'
INCL 1 x CABLE SUSP. SINGLE AUTO 5'
Class 2 1.1 IP20 DAMP

L 170mm / 6'-1/16

400mm 15'-3/4

Ø 38mm - 1'-1/2

OPTIONAL
DIMMABLE MODULATOR REMOTE
(ONLY FOR MDL)

		MDL		
		3500K / CRI>90	3000K / CRI>90	2700K / CRI>90
		LED 7.1W / 83lm / 48V-DC	LED 7.1W / 85lm / 48V-DC	LED 7.1W / 77lm / 48V-DC
		24"		
M20				
M26L				
M26H				
M35R		6 421 612 811 951 MDL ◇	6 421 612 811 931 MDL ◇	6 421 612 811 921 MDL ◇
M54				
M52				

NOTE	3500K / CRI>90 LED 7.1W / 830lm/48V-DC	3000K / CRI>90 LED 7.1W / 805lm/48V-DC	2700K / CRI>90 LED 7.1W / 773lm/48V-DC
M20	24" Ø8 / W		
M26L			
M26H			
M35R			
M44			
M52			

INCL.1 x CABLE 2 x 18 AWG / 5'

REQUIREMENTS ▶ INFO FOLD-OUT RIGHT / OPTIONS ▶ INFO TECHNICAL CHAPTER / ACCESSORIES ▶ INFO FOLD-OUT LEFT

OTHER CRI OR KELVIN ON REQUEST

PRO 689

REQUIREMENTS ▶ INFO FOLD-OUT RIGHT / OPTIONS ▶ INFO TECHNICAL CHAPTER / ACCESSORIES ▶ INFO FOLD-OUT LEFT

OTHER CRI OR KELVIN ON REQUEST

PRO 689

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 3 2 3 4 6 7 5 6 3 5
F. 3 2 3 4 6 7 5 6 3 4