



SPY 39 TRIMLESS IN

With a compact design, this fixture is available in two beam angles and various ways of installation. This version serves as both a downlight or as an adjustable spotlight, as the body can either be completely hidden into the ceiling or fully visible to aim at whatever is needed.

DETAILS.

FINISHES: BLACK, WHITE, GOLD COLORED, FLEMISH GOLD, FLEMISH BRONZE

**SHADE SIZE: Ø1.5" X 3.6" H; Ø1.5" BASE
RECESSED DEPTH: 5 1/8"**

**LED: 1 X 5.8-8.6W, 753-1041LM, CRI 90
ADJUSTABLE 0-85° / 355°
EXCL. LED POWER SUPPLY 350-500MA-DC**

**COLOR TEMPERATURE AVAILABLE:
2700K, 3000K, 3500K**

**AVAILABLE DEGREES:
20° OR 40°**


***DIMMABLE LED POWER SUPPLY AVAILABLE.
SPY 39 TUBE + ROUGH-IN REQUIRED; ACCESSORIES NOT INCLUDED.**

**IP20 - FOR INTERIOR USE ONLY.
ETL LISTED**

SPY 39 TRIMLESS IN



SPY 39 TRIMLESS IN

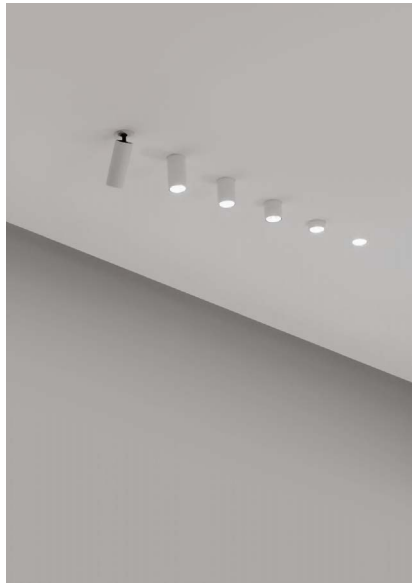

SPY 39	Black	White	Flemish Bronze	Flemish Gold	Gold Coloured
Black					
White					
Flemish Bronze					
Flemish Gold					
Gold Coloured					



i KIT

CRI > 90 SPY 39 TRIMLESS IN

3500 K LED [U] 5.8W / 816lm / 350mA
 LED [U] 8.6W / 1128lm / 500mA

REF FL 20° 6 24123 9520 ◇
 ◇ = B / FBR / FG / GC / W

REF WFL 40° 6 24123 9530 ◇
 ◇ = B / FBR / FG / GC / W

3000 K LED [U] 5.8W / 787lm / 350mA
 LED [U] 8.6W / 1089lm / 500mA

REF FL 20° 6 24123 9320 ◇
 ◇ = B / FBR / FG / GC / W

REF WFL 40° 6 24123 9330 ◇
 ◇ = B / FBR / FG / GC / W



2700 K LED [U] 5.8W / 753lm / 350mA
 LED [U] 8.6W / 1041lm / 500mA

REF FL 20° 6 24123 9220 ◇
 ◇ = B / FBR / FG / GC / W

REF WFL 40° 6 24123 9230 ◇
 ◇ = B / FBR / FG / GC / W

ADJUSTABLE 0-85° / 355°
0.9 IP20 DAMP

- REQUIREMENT**
 SPY 39 TUBE ▶ 24144 0010 ◇
 ◇ = B / FBR / FG / GC / W
- ROUGH-IN**
 LED POWER SUPPLY 350 / 500mA-DC DIM (REMOTE)
- ACCESSORIES**
 VIZIR 39 ▶ 24144 0030 B

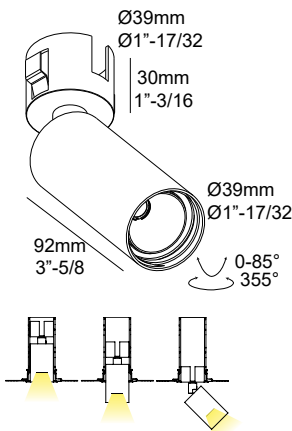

⁽¹⁾Values based on 3000K white finish 40°

Application

Finishing section to be used with Delta Light rough-in and remote power supply
 For indoor use only

Color Finish

- B - Black
- FBR - Flemish Bronze
- FG - Flemish Gold
- GC - Gold Colored Anodized
- W - White

Light Source

One Max. 8.6W LED included

Delivered Lumens

- 666lm at 3500K⁽¹⁾ at 350mA and 20° / 920lm at 500mA
- 661lm at 3500K⁽¹⁾ at 350mA and 40° / 914lm at 500mA
- 642lm at 3000K⁽¹⁾ at 350mA and 20° / 888lm at 500mA
- 638lm at 3000K⁽¹⁾ at 350mA and 40° / 883lm at 500mA
- 614lm at 2700K⁽¹⁾ at 350mA and 20° / 849lm at 500mA
- 610lm at 2700K⁽¹⁾ at 350mA and 40° / 844lm at 500mA

Power Supply

Remote installation

Specification features

Suitable for dry and damp location
 Weight: 0.9lbs

Dimensions

Ceiling Cut out: Ø 3"-1/4
 Recessed depth: 5" 1/8

PROJECT INFO


Date _____

Client _____

Project Name _____

Type/Quantity _____



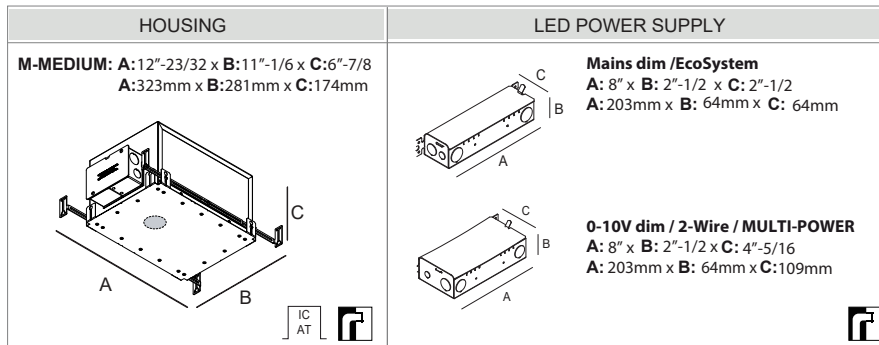

Indicative opening

HOUSING

Code	Description
6 202 200 120 01	IC/NIC AT M TRIMLESS (Requires LED power supply remote)

LED POWER SUPPLY REMOTE

Code	Description	MIN-MAX
6 300 44 ED1	LED POWER SUPPLY 350mA-DC 19W 0-10V dim 120-277V	1->3
6 300 45 ED1	LED POWER SUPPLY 500mA-DC 25W 0-10V dim 120-277V	1->2
6 300 46 ED8	LED POWER SUPPLY 350mA-DC 11W Mains dim 120V	1->1
6 300 62 ED8	LED POWER SUPPLY 500mA-DC 23W Mains dim 120V	2->2
6 300 90 ED8	LED POWER SUPPLY 500mA-DC 12W Mains dim 120V	1->1
6 300 70 ED12	LED POWER SUPPLY 350mA-DC 13W Hi-Lume 2-Wire ² 120V	1->2
6 300 72 ED12	LED POWER SUPPLY 500mA-DC 19W Hi-Lume 2-Wire ² 120V	1->2
6 300 41 ED13	LED POWER SUPPLY 350mA-DC 19W Lutron ECOSystem ¹ dim 120-277V	1->3
6 300 51 ED13	LED POWER SUPPLY 500mA-DC 20W Lutron ECOSystem ¹ dim 120-277V	1->2
6 300 15	LED POWER SUPPLY MULTI-POWER 15W 120V	1->2 / 1->1
6 300 14 ED7	LED POWER SUPPLY MULTI-POWER 15W 0-10V dim 120V	1->2 / 1->1

MIN-MAX VALUES BASED ON SERIES INTERCONNECTED FITTINGS

¹ DIMMING: Lutron Hi-lume EcoSystem LED driver with Softon, Fade-to-Black dimming technology - PEQ01

² DIMMING: Lutron Hi-lume 2-wire (120V forward phase only) - LTEA2W