



NULLA 18 EXTRADARK

Recessed ceiling lamp where its sole objective is to hide and give all the attention to whatever it is lighting. Features removable luminaire for maintenance. Accessible from below.

DETAILS.

VISIBLE HOLE: 0.71" Ø X 5.7" H

COMPULSORY INSTALL KIT + LED DRIVER REQ. 120V; 0/1-10V DIMMABLE

MAX DISTANCE: 49FT (15000MM)

MINIMUM SPACE FOR MOUNTING: 7.5"H X 17.5" W

24V DC - 3W LED CRI 90


20° - 2700K 162LM -OR- 3000K 173LM

ETL LISTED

RATED FOR IC-HOUSING

IP20 RATED FOR DAMP/DRY LOCATIONS

NULLA 18 EXTRADARK

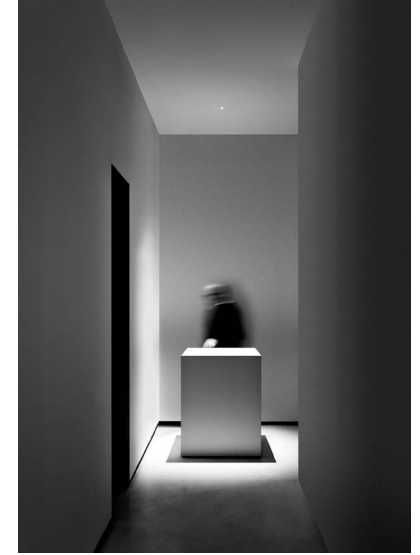

IIPL

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

NULLA 18 EXTRADARK



Compasso d'Oro ADI
Award 2014

DESIGN DAVIDE GROPPI - 2010
RECESSED CEILING LAMP - METAL




NULLA 18



The sizes are expressed in millimeters / inches.

14 / 5.51"
18 / 0.71"



1A2010003.27.20	STANDARD - 2700K - BEAM 20°	24 V DC - 3 W LED - UGR < 19
1A2010003.30.20	STANDARD - 3000K - BEAM 20°	2700K - 162 lm - CRI > 90 / 3000K - 173 lm - CRI > 90 - BEAM 20°
		VISIBLE HOLE Ø 18 mm / 0.71"
		COMPULSORY INSTALLATION KIT NOT INCLUDED
		DRIVER NOT INCLUDED

COMPULSORY INSTALLATION KITS

1A2210400.00.00	MATT BLACK	PLASTERBOARD FLANGE 12.5 mm / 0.49" PLASTERBOARD CUT-OUT Ø 22 mm / 0.86" - MINIMUM SPACE FOR MOUNTING 190 mm / 7.48"
-----------------	------------	---

OPTIONAL INSTALLATION KITS

1A2380000.00.00	STANDARD	PLASTER BOX DIMENSIONS 189 x 445 mm / 7.44" x 17.51"
-----------------	----------	---





II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

NULLA 18 EXTRADARK

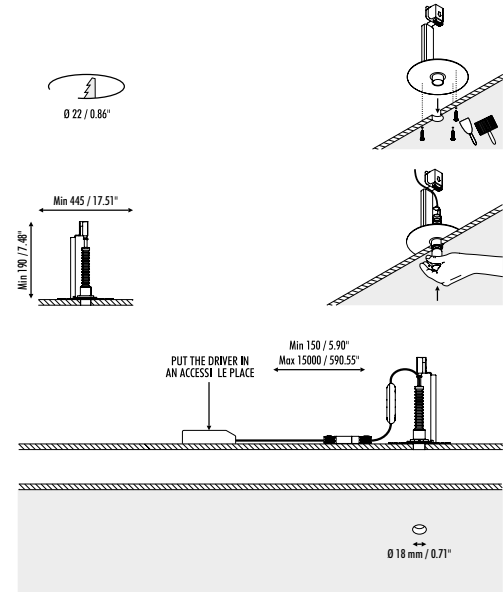

COMPULSORY INSTALLATION KITS

120240870.24	STANDARD	DRIVER INPUT (110-127 V) 120 V - 60 Hz - OUTPUT 24 V DC - (15 W) 20 W - IP20 PUSH - 0/1-10 V DIMMABLE
120241180.24	STANDARD	DRIVER INPUT (110-127 V) 120 V - 60 Hz - OUTPUT 24 V DC - (15 W) 16 W - IP20 DALI DIMMABLE

COMPULSORY INSTALLATION KITS FOR TRIAC DIMMING: DRIVER 120240410 + CONTROLLER 120000034

120240410	STANDARD	DRIVER INPUT (110-127 V) 120 V - 60 Hz - OUTPUT 24 V DC - (12 W) 22 W - IP20 NOT DIMMABLE
120000034	STANDARD	CONTROLLER DIMMABLE DALI - PUSH - TRIAC - 1-10 V - IP20