

LSL6 CYCLOPS



Micro-directional luminaire with solid brass construction, features a Thermally Integrated® LED module and interchangeable acrylic optics. The easily replaceable, self-contained ball fits snugly into a precision machined socket for exceptional heat dissipation. Offered in 4 unique shroud configurations. Available as stake, flush, or surface mount. Downlight version also available.

DETAILS.

FINISHES AVAILABLE IN:

NAT – NATURAL

BLP – BRONZE LIVING PATINA

BLP-XD – BLP EXTRA DARK

*CUSTOM FINISHES AVAILABLE UPON REQUEST.

OVERALL SIZE: Ø1 5/8" X 2 5/8" H MAX

COLOR TEMPS AVAILABLE:

2700K, 3000K, AMBER

SHROUD OPTIONS:

60 - 60° ANGLED, OPTIONAL

BEAM OPTIONS: 15°, 25°, 40°, ELLIPTICAL

IP67 – SUITABLE FOR WET LOCATIONS.

REMOTE LOW VOLTAGE TRANSFORMER REQUIRED -


DIMMABLE TO <10% (TRIAC/FORWARD PHASE)

*COMPATIBLE W/ 12V AC/DC MLV OR ELV TRANSFORMERS.


UL LISTED

**BRASS STAKE MOUNT AS STANDARD; OTHER OPTIONAL ACCESSORIES AVAILABLE.



LSL6 CYCLOPS

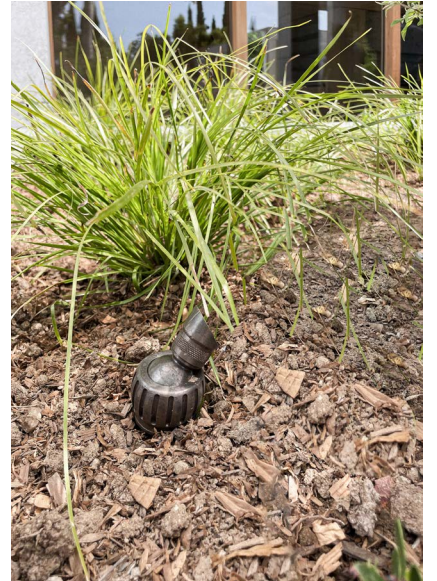

LSL6 CYCLOPS

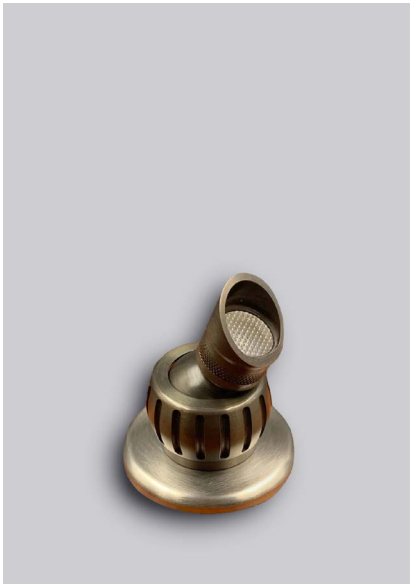

LSL6 CYCLOPS

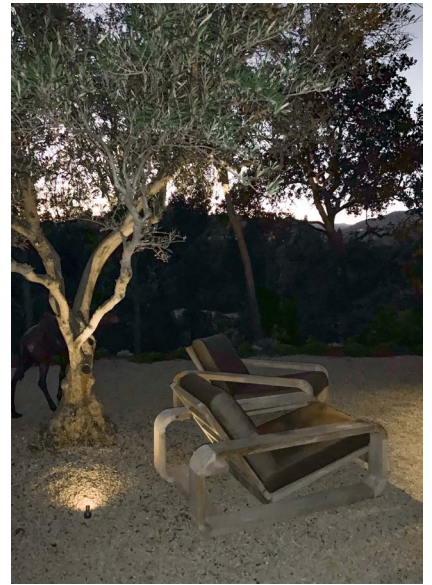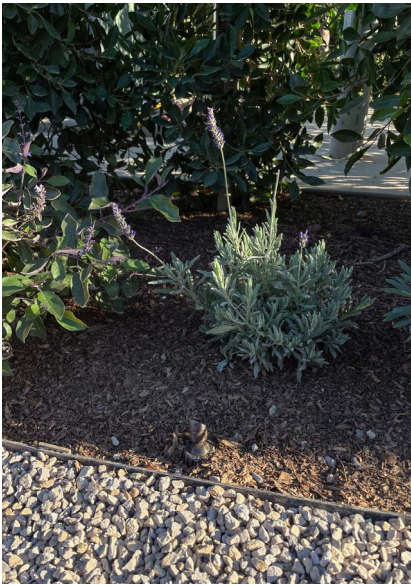

CYCLOPS

DIR060130

The Cyclops is a Micro-Directional luminaire. The easily replaceable, self contained ball fits snugly into a precision machined socket for exceptional heat dissipation allowing this luminaire to operate at 3 watts.

- US Patent No: D863,607 S
- Cree LED™ XLAMP® High Density (XP-L)
- 3 interchangeable PMMA acrylic optics from 15° to 40°
- Ideal for planters, small greenery & facade

CONFIGURATOR:



DIR060130	LED	FINISH
() = Most common configuration	(2703) 2700K 3W (3003) 3000K 3W	(NAT) Natural Brass (BLP) Bronze Living Patina (BLPX) Extra Dark BLP (NI) Nickel PVD



AVAILABLE FINISHES:



FIXTURE DIMENSIONS	L1-5/8" x H2-5/8" x D1"
LIGHT SOURCE	Integrated LED
COLOR TEMPERATURES	2700K, 3000K
WATTAGES	3W
CRI (RA)	80 CRI
VOLTAGE	12V
DELIVERED LUMENS	170lm (3000K)
DIMMABLE	Yes, Dim to <10% via Transformer
DRIVER	Yes, 12V Integral Constant Current
TRANSFORMER	No, 12V AC/DC Transformer Required
MOUNT	Yes, 1/2" NPS Threaded Base
GROUND STAKE	Yes, Included MGS001108
ACCESSORIES	Yes, Included 60° Glare Shield
OPTICS	Yes, Included 15°, 25° & 40°
FINISH	Included Natural Brass
MATERIAL	Brass
WIRE LENGTH	24"
LOCATION	Exterior Wet
CERTIFICATIONS	UL, IP66, IP67

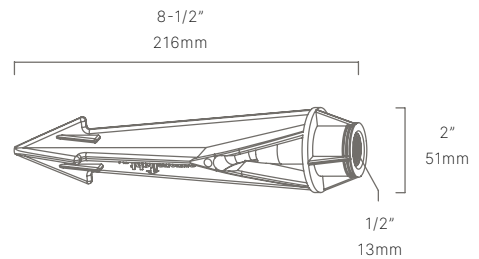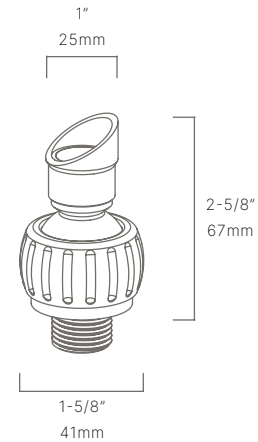

MADE IN USA
WITH DOMESTIC & IMPORTED MATERIALS



ADD-ONS


MOUNTS

<input type="checkbox"/>	MGS001106	Brass Micro Stake
<input type="checkbox"/>	MGS001510	Ground Stake w/ 2" Brass Cap
<input type="checkbox"/>	MGS005109	9" Deluxe Spike
<input type="checkbox"/>	MJB002303	3" Junction Box w/ PVC Stake
<input type="checkbox"/>	MPM003104	Concrete Pedestal Mount
<input type="checkbox"/>	MJB012103	Surface Mount J-Box
<input type="checkbox"/>	MSM189102	2" Surface Mount
<input type="checkbox"/>	MSM189203	3" Surface Mount
<input type="checkbox"/>	MCP183203	3-1/2" Cover Plate
<input type="checkbox"/>	MCP183304	4" Cover Plate
<input type="checkbox"/>	MCP183404	4-1/2" Cover Plate
<input type="checkbox"/>	MMC192105	4-1/2" Mount Canopy
<input type="checkbox"/>	MMC192305	4-1/2" Power Canopy
<input type="checkbox"/>	MTR425302	36" Light Duty Tree Strap
<input type="checkbox"/>	MTR425102	Screw-in Tree Mount
<input type="checkbox"/>	MTR425202	Bolt-on Tree Mount

*For complete details, please visit auroralight.com/mounts/

RISERS

<input type="checkbox"/>	RSR186108	4" Fixed Riser
<input type="checkbox"/>	RSR186112	12" Fixed Riser
<input type="checkbox"/>	RSR186210	5" x 10" Extendable Riser
<input type="checkbox"/>	RSR186218	9" x 18" Extendable Riser
<input type="checkbox"/>	RSR186222	11" x 22" Extendable Riser
<input type="checkbox"/>	RSR186412	12" Subterranean Riser
<input type="checkbox"/>	RSR186418	18" Subterranean Riser

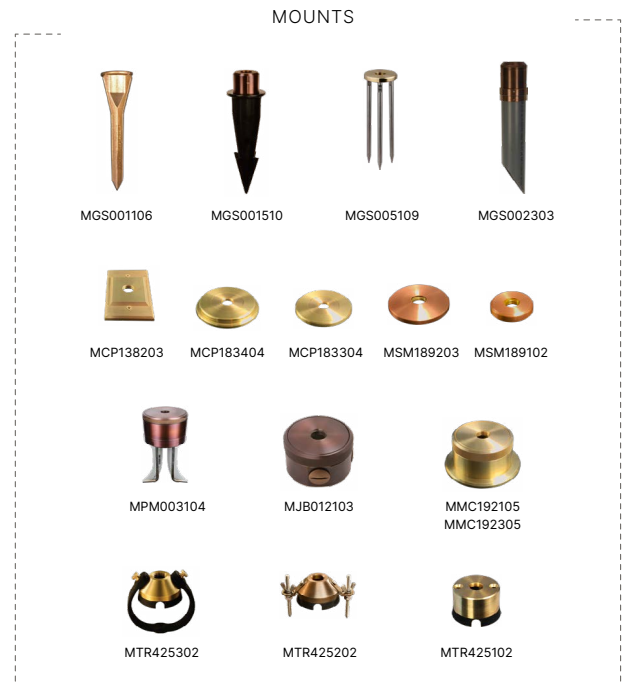

MADE IN USA
WITH DOMESTIC & IMPORTED MATERIALS

