



BOULO W/C

Low profile, minimal surface mount featuring sandblasted or clear glass. Available as ceiling or wall mount - plaster kit required.

Design by: Bruno Van Meenen

DETAILS.

SIZE: Ø 3" X 1 1/2" H

LIGHT ELEMENT:

1 X 21 LED 0.2W (INCLUDED) 500MA

2300K 564 LM, 90 CRI

-OR-

2700K 587 LM, 90 CRI

REMOTE DRIVER: 1-10V DIMMABLE, 500MA

IP50 - FOR INDOOR USE

BOULO W/C



II P L

PLUGLIGHTING.COM
INFO@PLUGLIGHTING.COM

5665 MELROSE AVENUE
STE 108 LOS ANGELES 90038

P. 323 467 5635
F. 323 467 5634

BOULO W/C MATT

SPECS & TECHS

Material

sandblasted glass

Lightsource

Boulo (for false wall)
 1x 21 LED 0,14W (LED incl.)
 2300K (400lm) or 2700K (417lm)
 – CRI>90
 aperture: Ø67 – depth: min.
 70mm
 required free air area: 100 x 100
 x 60mm

Boulo (for concrete wall)
 1x 21 LED 0,14W (LED incl.)
 2300K (400lm) or 2700K (417lm)
 – CRI>90
 aperture: Ø67 – depth: min.
 70mm
 required free air area: Ø67 x
 100mm

Connection

Boulo (for false wall)
 remote mounted driver (350mA)
 depth for driver in wall: min.
 70mm
 depth for driver remote: min.
 60mm

Boulo (for concrete wall)
 remote mounted driver (350mA)
 driver must be on distance


Accessory

Plaster kit for wall



Technical specs

indoor – IP50 – class 3

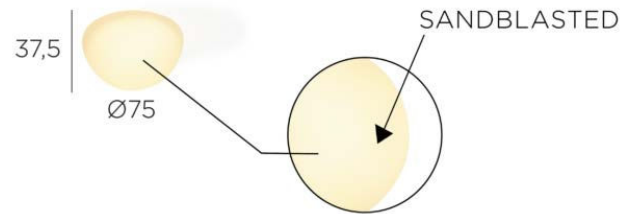

BOULO W/C CLEAR

SPECS & TECHS

Material

transparent glass + screen
printed inner side

Lightsources

Boulo (for false wal)
1x 21 LED 0,14W (LED incl.)
2300K (400lm) or 2700K (417lm)
– CRI>90
aperture: Ø67 – depth: min.
70mm
required free air area: 100 x 100
x 60mm

Boulo (for concrete wall)
1x 21 LED 0,14W (LED incl.)
2300K (400lm) or 2700K (417lm)
– CRI>90
aperture: Ø67 – depth: min.
70mm
required free air area: Ø67 x
100mm


Connection

Boulo (for false wall)
remote mounted driver (350mA)
depth for driver in wall: min.
70mm
depth for driver remote: min.
60mm

Boulo (for concrete wall)
remote mounted driver (350mA)
driver must be on distance

Accessory

Plaster kit for wall



Technical specs

indoor – IP50 – class 3
CE 

